


[illegible]

표기와 일반 공차	
각도 : $\pm 0.2^\circ$	6 - 30 : ± 0.1
CHAMFER: C1.0	30 - 120 : ± 0.15
FILLET: R1.0	120 - 315 : ± 0.2
마무리: 	315 - 1000 : ± 0.3
	1000 이상 : ± 0.5

	NAME	DATE
CHECKED	한창식	08.04.30
APPROVED		

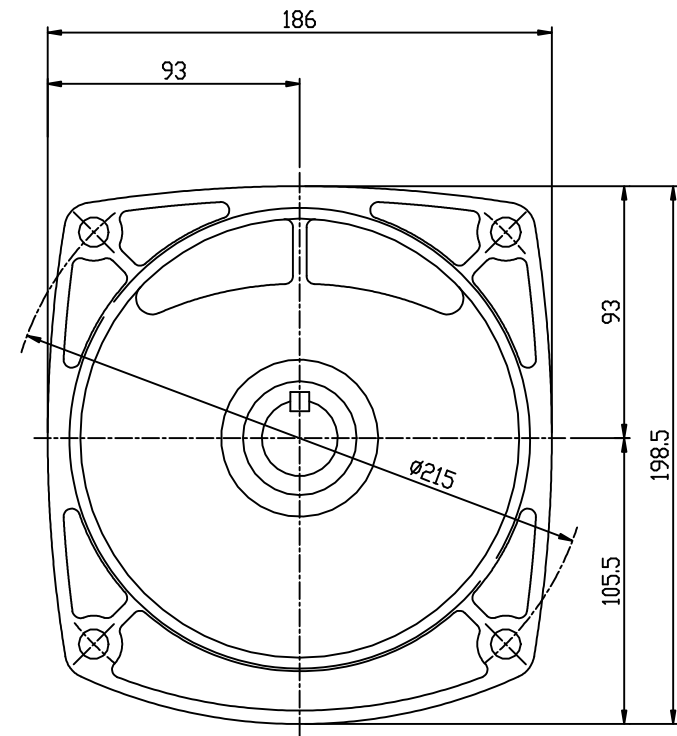

SAMYANG
REDUCTION GEARS CO., LTD.

OUTPUT SHAFT