
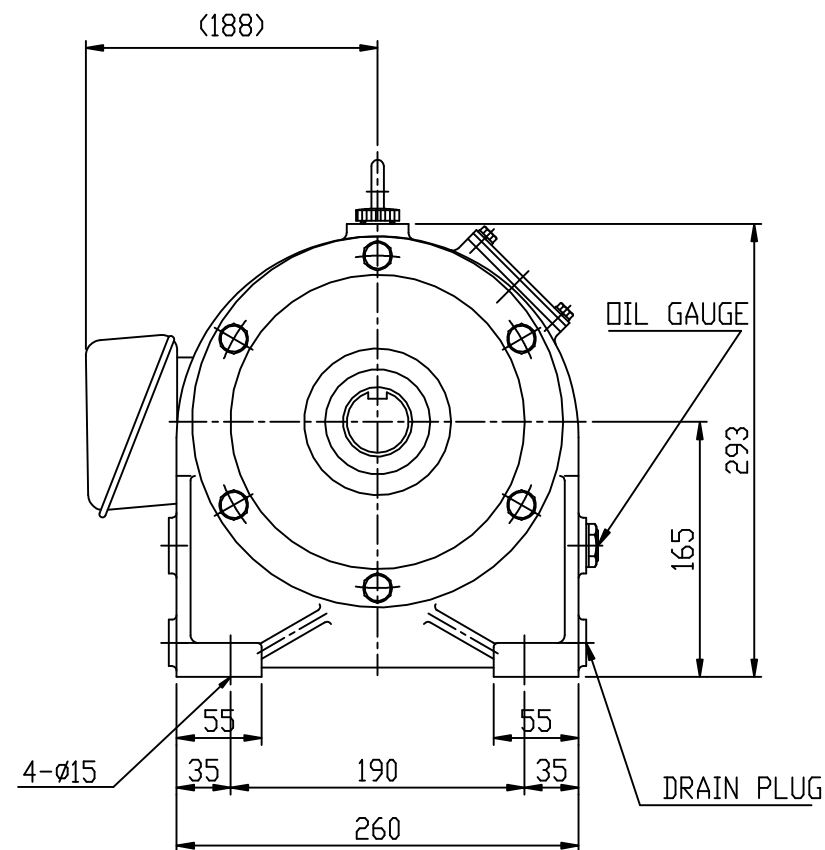
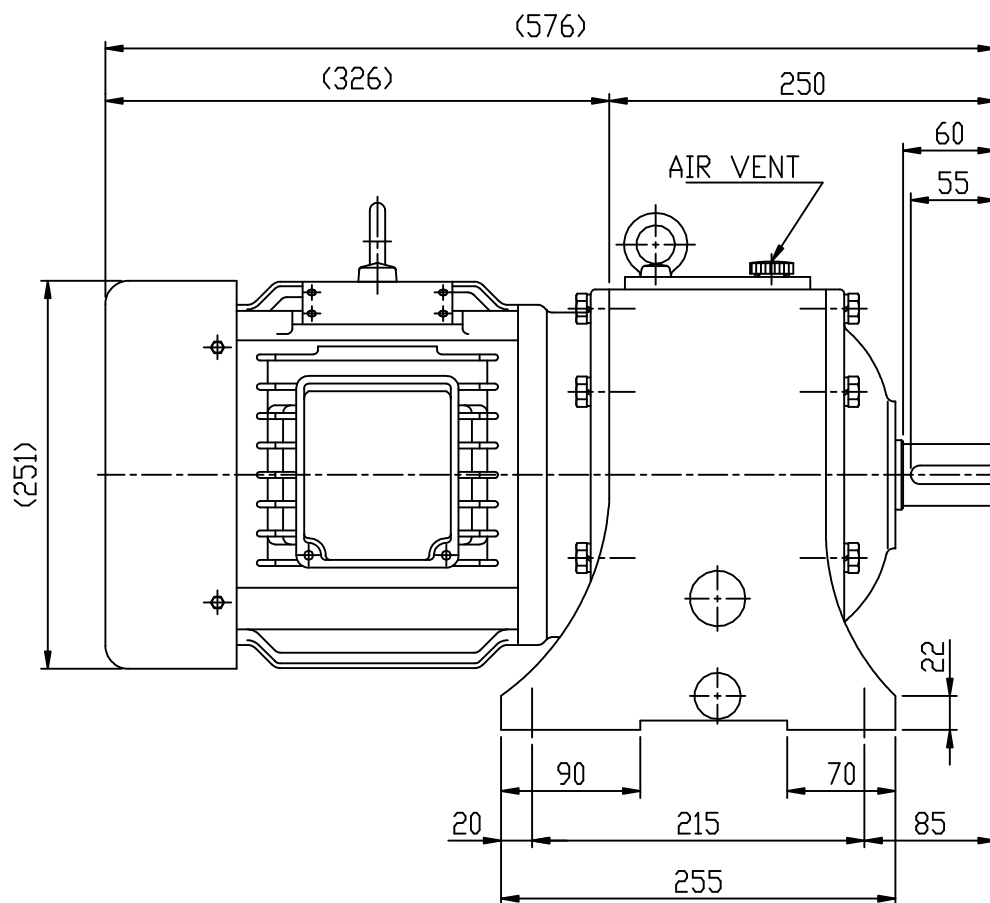


| REV | ZONE | DESCRIPTIONS | DRWN | APPVD |
|-----|------|--------------|------|-------|
|     |      |              |      |       |

[illegible]

|                                              |                     |                        |                    |
|----------------------------------------------|---------------------|------------------------|--------------------|
| 본 도면은 (주)삼양강속키의 기밀인물로 무단으로 복제·배포·공개할 수 없습니다. | 각도: $\pm 0.5^\circ$ |                        | 6 - 30 : $\pm 0.1$ |
|                                              | CHAMFER: C1.0       | 30 - 120 : $\pm 0.15$  |                    |
|                                              | FILLET: R1.0        | 120 - 315 : $\pm 0.2$  |                    |
|                                              | 마무리: ▽▽             | 315 - 1000 : $\pm 0.3$ |                    |
|                                              | 열처리:HRC             | 1000 이상 : $\pm 0.5$    |                    |
|                                              |                     |                        |                    |