

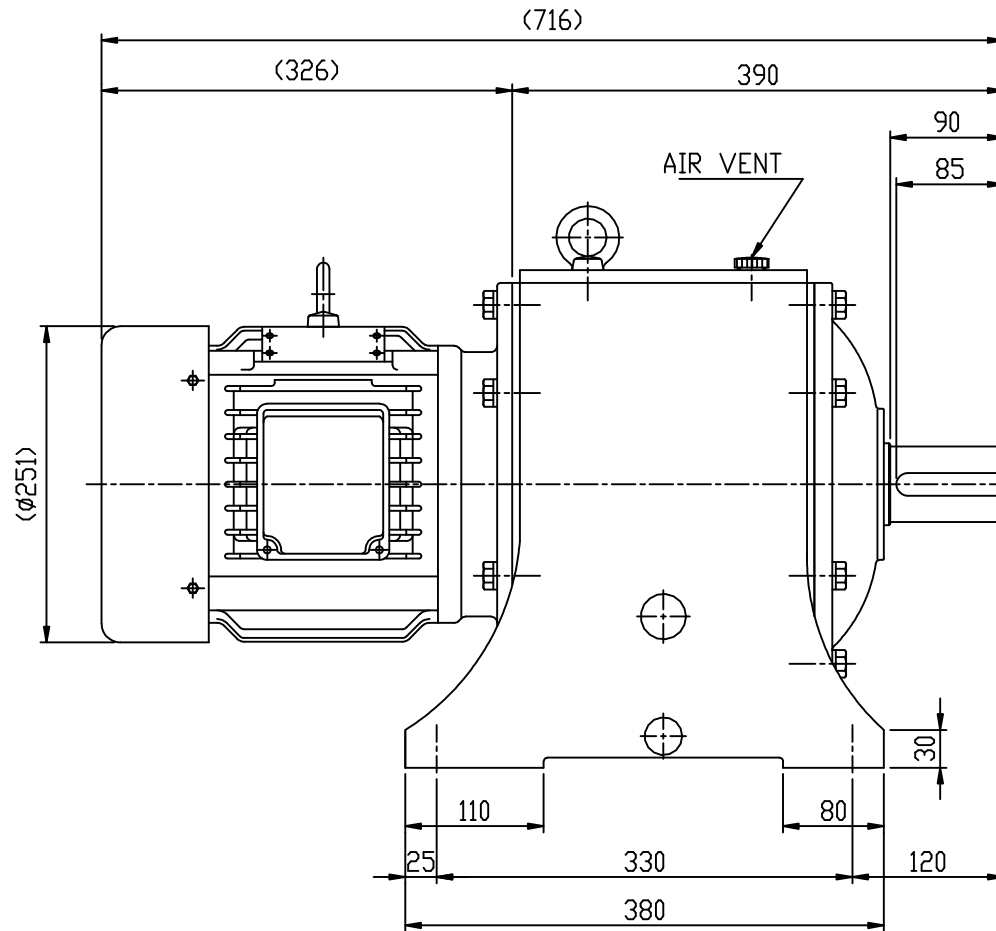


		4		
REV	ZONE	DESCRIPTIONS	DRWN	APPVD

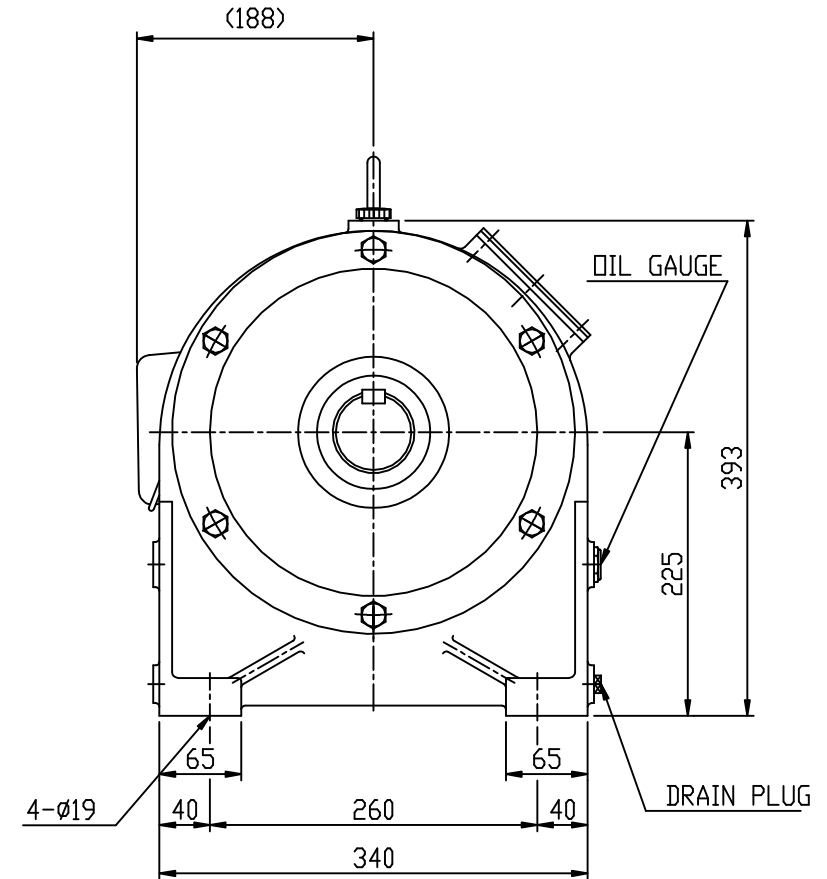

OUTPUT SHAFT

[illegible]

표기의 표준 가공 및 공차	
각도: $\pm 0.5^\circ$	6 - 30 : ± 0.1
CHAMFER: C1.0	30 - 120 : ± 0.15
FILLET: R1.0	120 - 315 : ± 0.2
마무리: 	315- 1000 : ± 0.3
열처리: HRC	1000 이상 : ± 0.5