

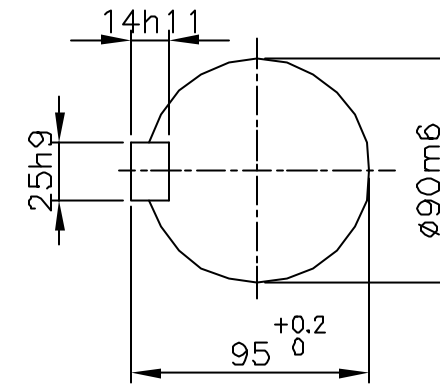


| NO | NAME      | MATERIAL | DWG.NO. | Q'TY | SIZE | REMARKS |
|----|-----------|----------|---------|------|------|---------|
|    | DIMENSION |          |         |      |      |         |

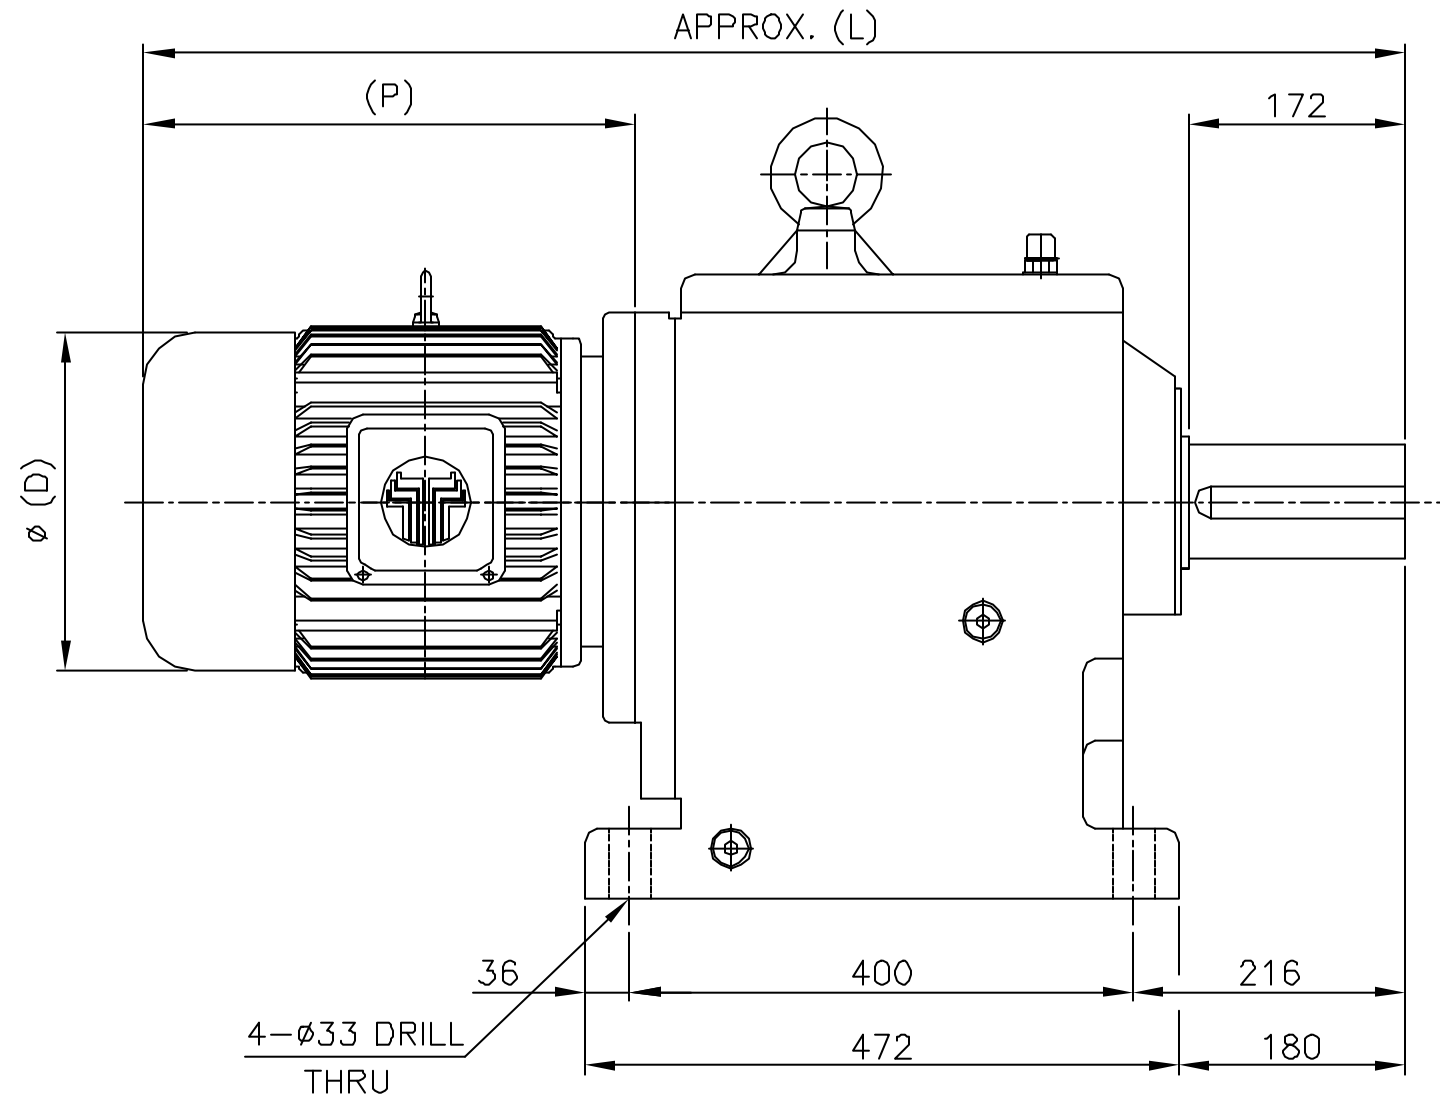

OUTPUT SHAFT

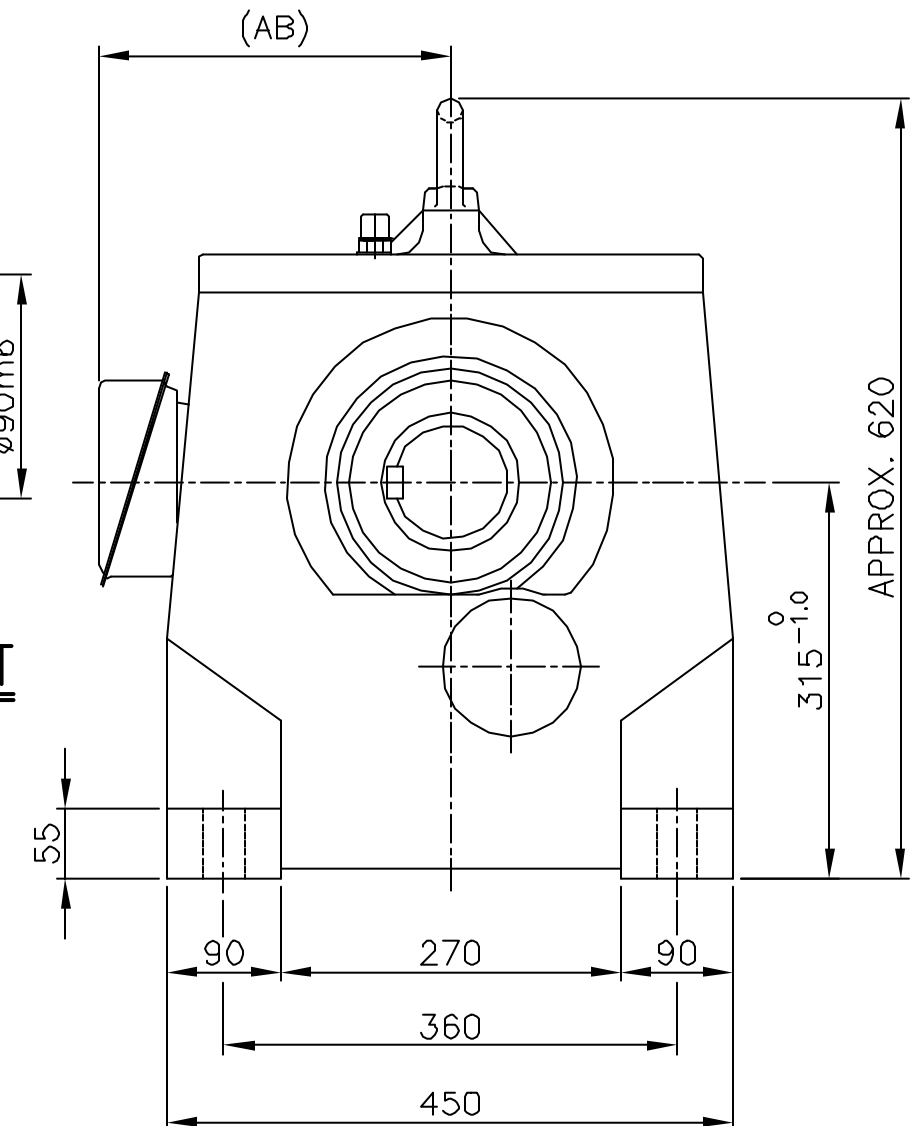

| 항 번 | (L)  | (P) | (D) | (AB) | (1)    | (2)    | (3)       | (4) | (5)  |
|-----|------|-----|-----|------|--------|--------|-----------|-----|------|
| G01 | 1002 | 390 | 284 | 215  | 6206ZZ | 6308ZZ | 40x62x11  | 420 | 132M |
| G02 | 1072 | 460 | 337 | 269  | 6207ZZ | 6310ZZ | 50x72x12  | 450 | 160M |
| G03 | 1116 | 504 | 337 | 269  | 6207ZZ | 6310ZZ | 50x72x12  | 475 | 160L |
| G04 | 1170 | 558 | 374 | 288  | 6212ZZ | 6312ZZ | 60x82x12  | 490 | 180M |
| G05 | 1210 | 598 | 374 | 288  | 6212ZZ | 6312ZZ | 60x82x12  | 505 | 180L |
| G06 | 1300 | 688 | 414 | 317  | 6212ZZ | 6313ZZ | 65x90x13  | 630 | 200L |
| G07 | 1325 | 713 | 465 | 406  | 6314   | 6314   | 70x95x13  | 745 | 225S |
| G08 | 1350 | 738 | 465 | 406  | 6314   | 6314   | 70x95x13  | 775 | 225M |
| G09 | 1385 | 773 | 529 | 434  | 6312   | 6317   | 85x110x13 | 915 | 250S |
| G10 | 1420 | 808 | 529 | 434  | 6312   | 6317   | 85x110x13 | 970 | 250M |

NOTE : 감속비가 1/15이하일 경우는 ( )안의 베어링은 제외시키고  
\*\*\* 부분의 베어링은 # NJ309E, # 21310, # NJ310E를 사용함.

| REV | DESCRIPTION | APPR | CHCK | DRWN | DATE |
|-----|-------------|------|------|------|------|
| △   |             |      |      |      |      |
| △   |             |      |      |      |      |
| △   |             |      |      |      |      |
| △   |             |      |      |      |      |
| △   |             |      |      |      |      |

|   |                        |            |                            |
|---|------------------------|------------|----------------------------|
| B | # (1)                  | # (2)      | OIL SEAL                   |
| R | (# 6308)               | (# NJ308E) | INPUT D(M) (3)             |
| G | *** # NJ310E           | # NJ310E   | OUTPUT D(M) 105 x 160 x 14 |
|   | # 22212                | # 22218    | WEIGHT : (4) kg            |
|   | Lubricant : ISO VG 220 |            | MOTOR FRAME (5) FR         |

|                             |  |                       |                       |           |                        |       |       |                 |
|-----------------------------|--|-----------------------|-----------------------|-----------|------------------------|-------|-------|-----------------|
| TYPE                        |  |                       |                       | DWG. NAME |                        |       |       |                 |
| HHM32                       |  |                       |                       | DIMENSION |                        |       |       |                 |
| APPROV                      |  | CHECK                 | DESIGN                | DRAWN     | THIRD ANGLE PROJECTION | SCALE | 1 / 6 | DATE 1997.5.30. |
| 김<br>(98.07.13)<br>동일       |  | 문<br>(98.07.13)<br>병욱 | 홍<br>(98.07.13)<br>원철 |           | REF DWG NO.            |       |       |                 |
| HYOSUNG INDUSTRIES CO.,LTD. |  |                       |                       | DWG NO.   | G K D S 4 7 2          |       |       |                 |