

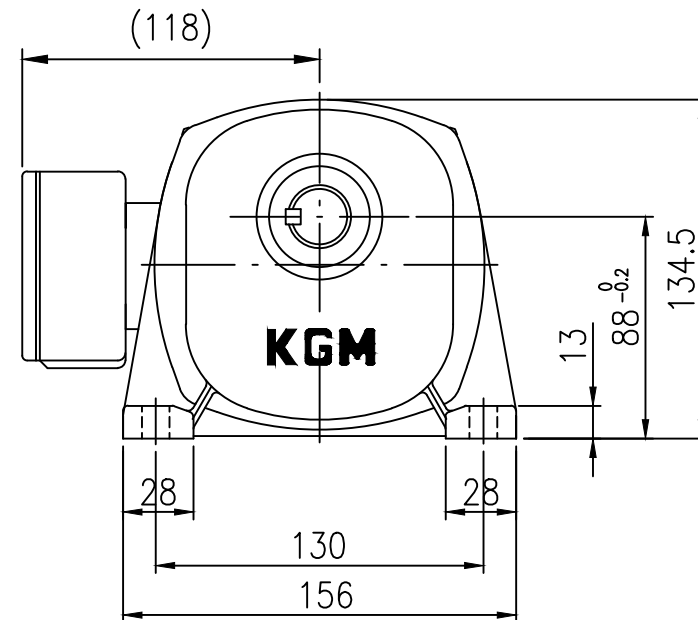


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KF88-1/4HP 4P 삼상

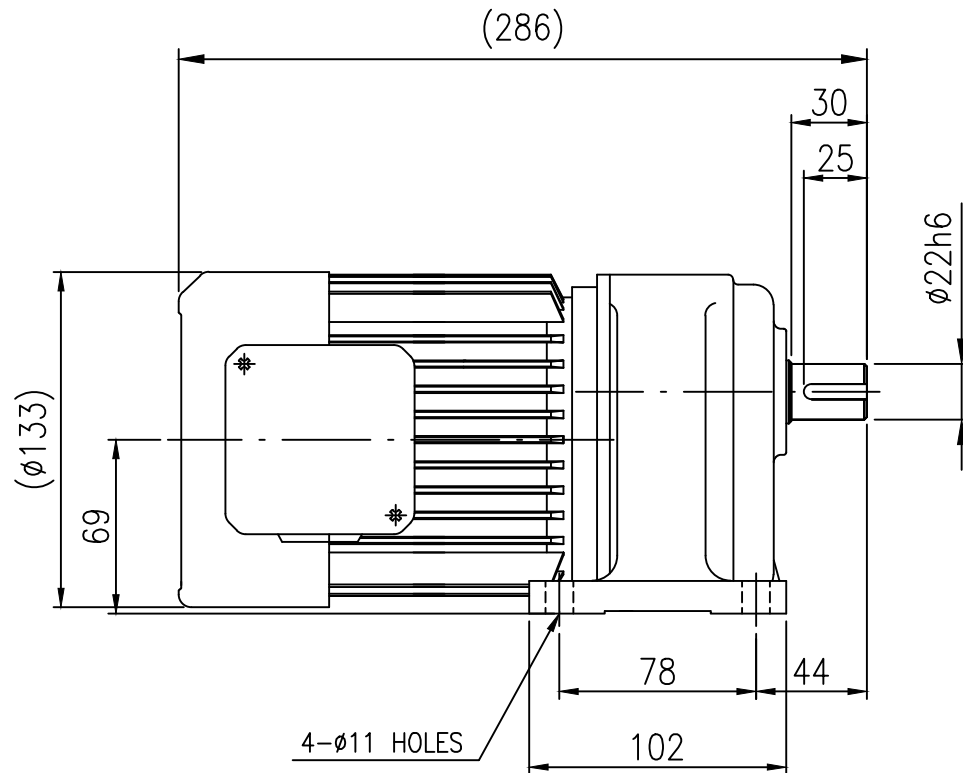

OUTPUT KEY

KF88	CAPACITY (Kw)	0.2Kw 4P					WEIGHT (Kg)
	REDUCTION RATIO	1/5	1/10	1/15	1/20	1/30	
	OUTPUT R.P.M	360	180	120	90	60	

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

TOOTH CHAMFERING		MODULE						표기외 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ, T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ±0.1
	C2	1.0	1.5	2.0				FILLET: R1.0	30 - 315 : ±0.1
HC & HQ, I	C1	0.5	1.0	2.0				마무리: ▽	315 - 1000 : ±0.1
	C2	2.0	3.0	5.0				M<8(R0.1-1M)	M=8-15(R0.3M)

No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.		GEARED MOTOR KF88 1/4HP 4P I=1/5~1/30	CUSTOMER STANDARD TYPE			
DRAWN		KSS	SCALE	1 / 1	UNIT	mm
DESIGN		YHH	DATE	2019.07.15	PROJECTION	☞
CHECKED			REF. No.			REV. No. △
APPROVED			DRAWING No.	KGM-KF88-HT-0.25-OD-00		
		(주) 케이 지 엠 KOREA GEARED MOTOR				