

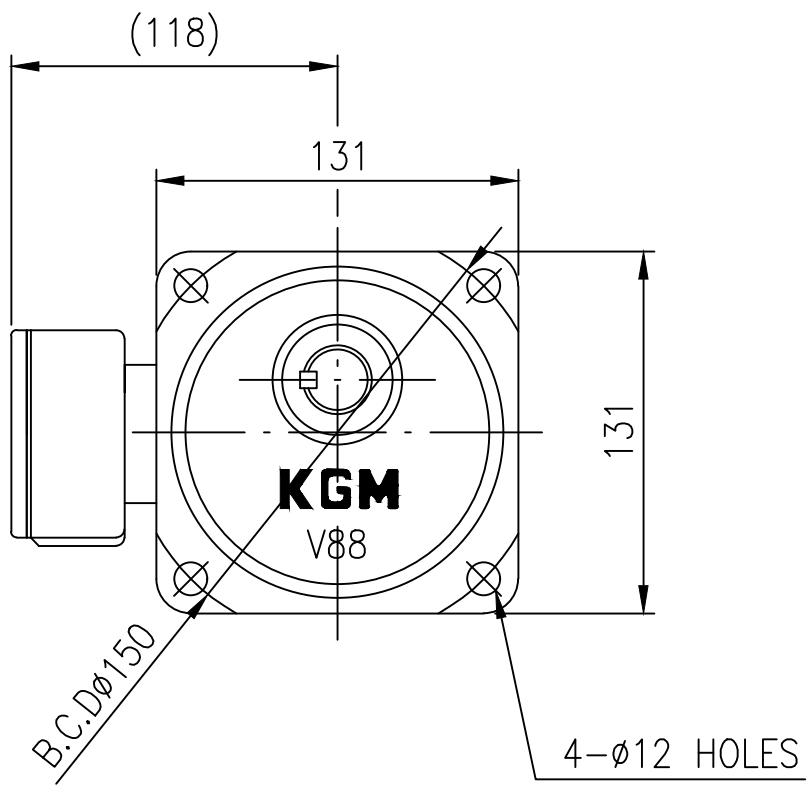


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KV88-1/4HP 4P 삼상

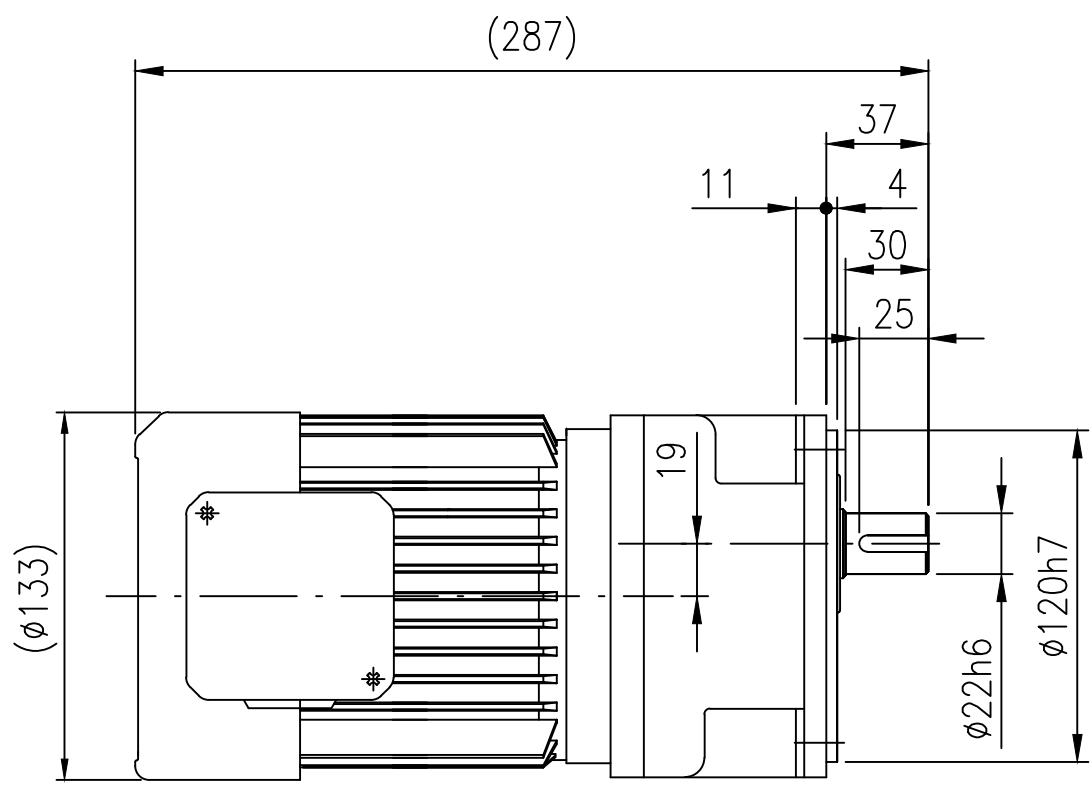

OUTPUT KEY

KV88	CAPACITY (Kw)	0.2Kw 4P					WEIGHT (Kg)
	REDUCTION RATIO	1/5	1/10	1/15	1/20	1/30	
	OUTPUT R.P.M	360	180	120	90	60	

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

TOOTH CHAMFERING		MODULE					표기외 일반 공차	
		5	5-15	15			각도 : ±0.2°	6 - 30 : ±0.1
HQ, T	C1	0.2	0.5	1.0			CHAMFER: C1.0	30 - 120 : ±0.15
	C2	1.0	1.5	2.0			FILLET: R1.0	120 - 315 : ±0.2
HC & HQ, I	C1	0.5	1.0	2.0			마무리: ▽	315 - 1000 : ±0.3
	C2	2.0	3.0	5.0				1000 이상 : ±0.5
		M<8(R0.1-1M)			M=8-15(R0.3M)		M>15(R0.3M)	

No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	GEARED MOTOR KV88 1/4HP 4P I=1/5~1/30			CUSTOMER STANDARD TYPE					
	OUT LINE DWG								
DRAWN	KSS	SCALE		1 / 1		UNIT		mm	
DESIGN	YHH	DATE		2019.07.15		PROJECTION			
CHECKED		REF. No.						REV. No.	
APPROVED		DRAWING No.		KGM-KV88-VT-0.25-00-00					
 (주) 케이 지 엠 KOREA GEARED MOTOR									

본 도면은 (주)케이 지 엠의 기술 재산입니다. 본 도면은 지적 재산권 관련 법규에 의하여 보호되며, (주)케이 지 엠으로 부터 문서에 의한 승인 없이는 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.