



NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

NKV105-1/2HP 4P 삼상

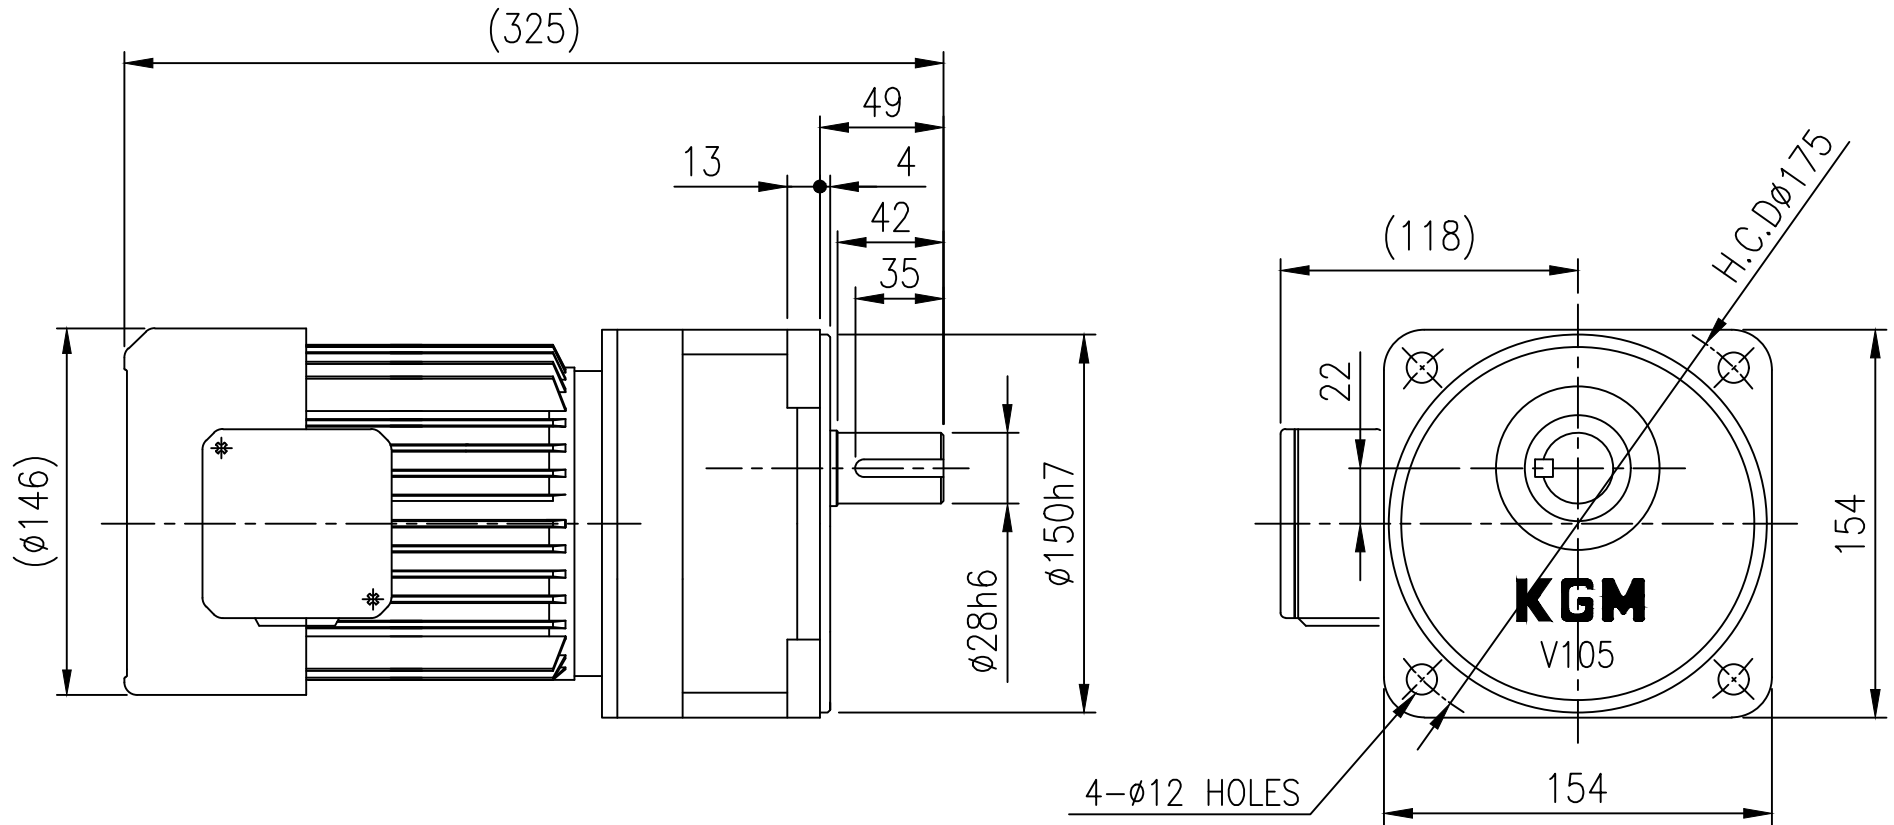

OUTPUT KEY

NKV105	CAPACITY (Kw)	0.4Kw 4P					WEIGHT (Kg)
	REDUCTION RATIO	1/5	1/10	1/15	1/20	1/30	
	OUTPUT R.P.M	360	180	120	90	60	

TOOTH CHAMFERING		MODULE			표기외 일반 공차	단도 : $\pm 0.2^\circ$	6 - 30 : ± 0.1	CHAMFER: C1.0	30 - 120 : ± 0.15	FILLET: R1.0	120 - 315 : ± 0.2	마무리: ∇	315 - 1000 : ± 0.3	1000 이상 : ± 0.5
		5	5-15	15										
HQ, T	C1	0.2	0.5	1.0	M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)	1.0mm	1.6mm-2.35mm	15°	15°	1.0mm	1.6mm-2.35mm	1.0mm
	C2	1.0	1.5	2.0										
HC & HQ, I	C1	0.5	1.0	2.0	M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)	1.0mm	1.6mm-2.35mm	15°	15°	1.0mm	1.6mm-2.35mm	1.0mm
	C2	2.0	3.0	5.0										

No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.		GEARED MOTOR NKV105 1/2HP 4P I=1/5~1/30 OUT LINE DWG	CUSTOMER NEW STANDARD TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT	mm	
DESIGN	YHH	DATE	2019.07.16	PROJECTION	1st Angle	
CHECKED		REF. No.				
APPROVED		DRAWING No.	KGM-NKV105-VT-0.5-00-00	REV. No.		
(주) 케이 지 엠 KOREA GEARED MOTOR						

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3