



	M
	M
	M
	M
	M
	M

15*0.8
16* 1
18*1.25
110*1.5
12*1.75
116* 2
118*2.5
20*2.5
122*2.5
124*3



HIGH RATIO NKF105	CAPACITY (Kw)	0.2Kw 4P			WEIGHT (Kg)
	REDUCTION RATIO	1/150	1/175	1/120	
	OUTPUT R.P.M	12	10.3	9	16

TOOTH CHAMFERING	MODULE					표기와 일반 공차		본 도면은 (주)케이치와 관련된 회사에서 제작된 것으로, 이 도면에 의해서 만들어진 (주)케이치와 모든 부품 및 서비스에 대한 어떠한 보증도 본 도면의 정확 또는 일부만 복사 또는 변형되어, 본 도면의 정확을 보증할 수 없습니다.
	2	5-15	15			관도 : ± 0.2	CHAMFER: C1.0	
HQ. T	C1	0.2	0.5			6 - 30	± 0.1	± 0.5
HC & HQ. I	C2	1.0	1.5			30 - 120	± 0.1	± 0.5
	C1	0.5	1.0			FILLET: R1.0	120 - 315	± 0.2
	C2	2.0	3.0			대우리:	315 - 1000	± 0.3
	C2	2.0	3.0	M=8(R0.1-1M)	M=8-15(R0.3M)	M=15(R0.3M)	1000 이상	± 0.5

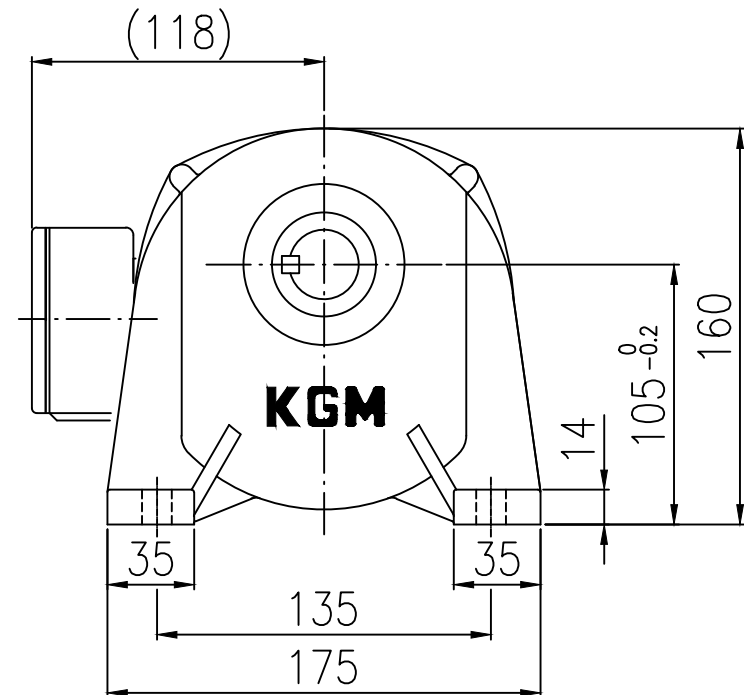

No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	HIGH RATIO GEARED MOTOR 신형 NKF105-1/4HP 4P 삼상	CUSTOMER NEW STANDARD TYPE				
	RATIO=1/150~1/200					
DRAWN	KSS	SCALE	1 / 1	UNIT	mm	
DESIGN	YHH	DATE	2020.12.24	PROJECTION		
CHECKED		REF. No.				REV. No.
APPROVED		DRAWING No.	KGM-NKF105-HT-0.25-0D-000			△
 (주) 케이지엠 KOREA GEARED MOTOR						