

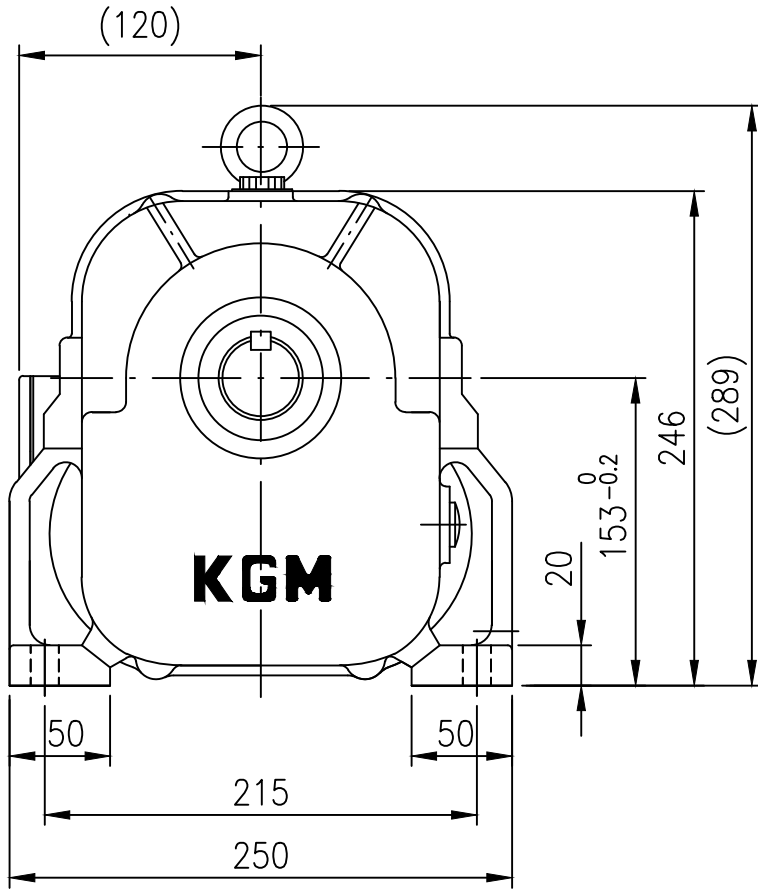


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KF153-1HP 4P 삼상

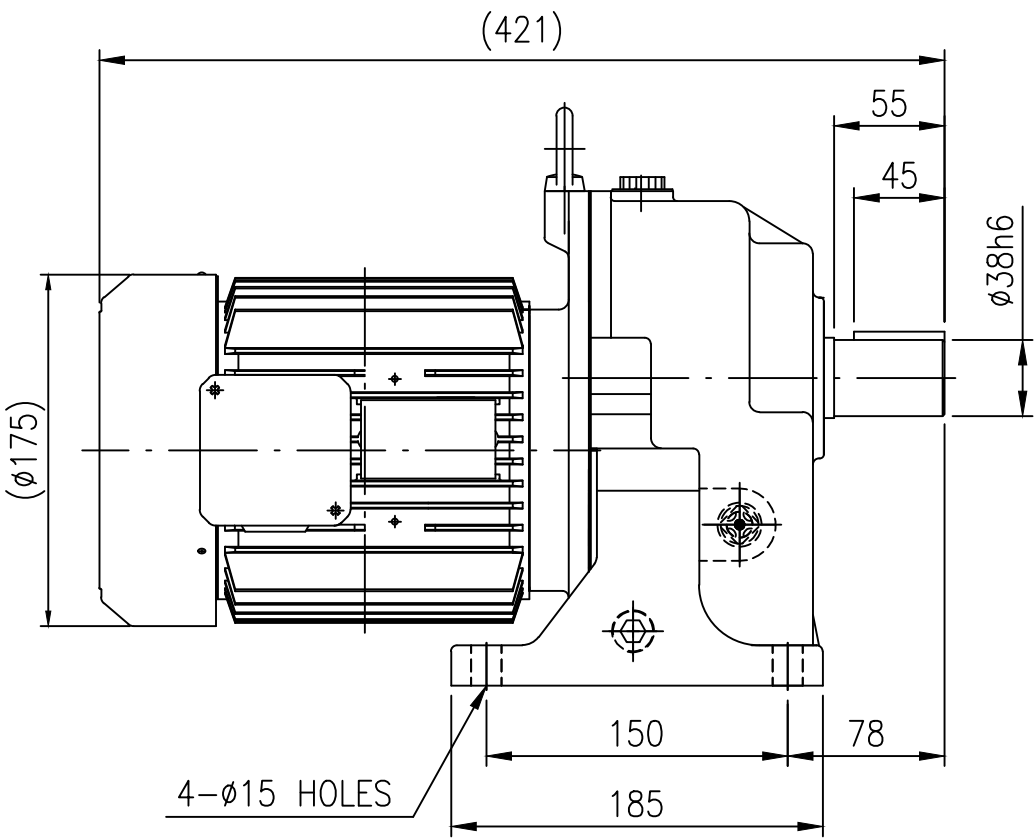

OUTPUT SHAFT

KF153	CAPACITY (Kw)	0.75Kw 4P				WEIGHT (Kg)
	REDUCTION RATIO	1/40	1/50	1/60	1/75	
	OUTPUT R.P.M	45	36	30	24	

TOOTH CHAMFERING		MODULE			표기외 일반 공차	
		5	5-15	15		
HQ, T	C1	0.2	0.5	1.0	각도 : ±0.2°	6 - 30 : ±0.1
	C2	1.0	1.5	2.0	CHAMFER: C1.0	30 - 120: ±0.15
HC & HQ. I	C1	0.5	1.0	2.0	FILLET: R1.0	120 - 315 : ±0.2
	C2	2.0	3.0	5.0	마무리: ▽	315 -1000 : ±0.3
					1000 이상 : ±0.5	

		OUT LINE DWG							
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	GEARED MOTOR KF153 1HP 4P I=1/40~1/75				CUSTOMER STANDARD TYPE				
	OUT LINE DWG								
DRAWN	KSS	SCALE		1 / 1		UNIT		mm	
DESIGN	YHH	DATE		2019.07.16		PROJECTION			
CHECKED		REF. No.						REV. No.	
ARRROVED		DRAWING No.		KGM-KF153-HT-01-OD-00					
 (주) 케이 지 엠 KOREA GEARED MOTOR									

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3