

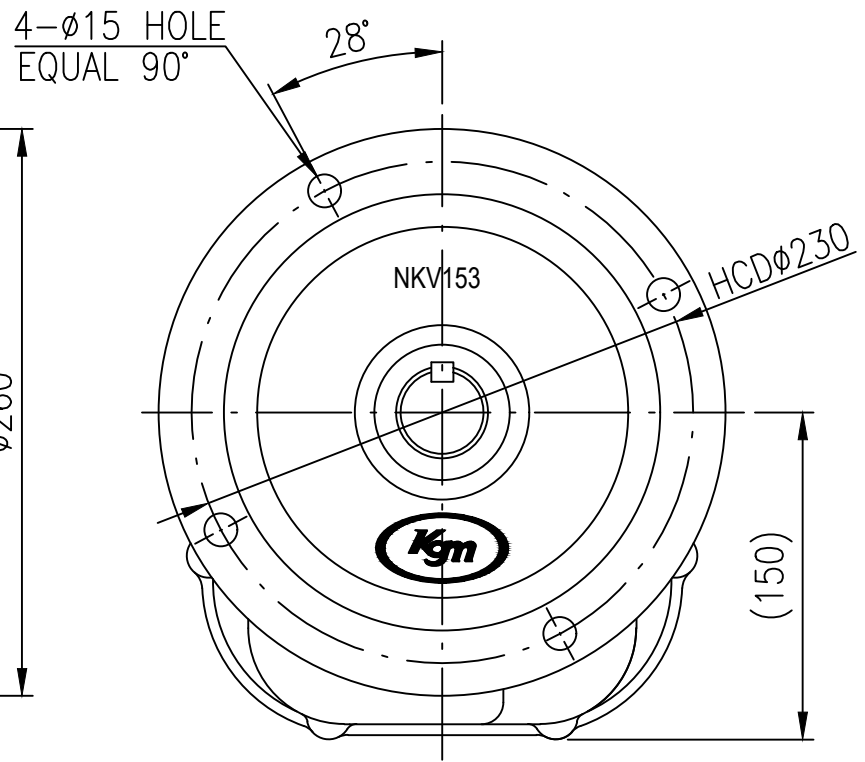


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KV153-1HP 4P 삼상

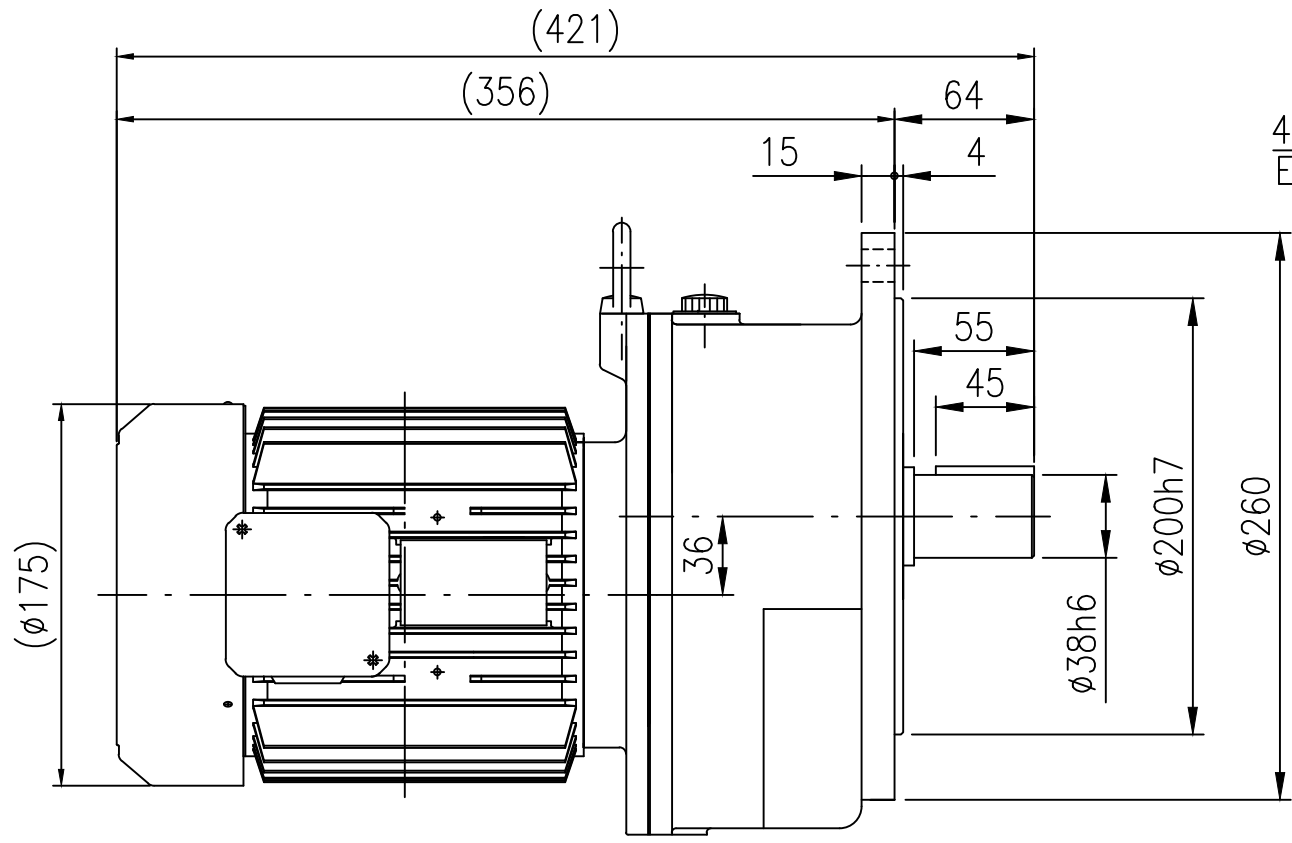

OUTPUT SHAFT

KV153	CAPACITY (Kw)	0.75Kw 4P				WEIGHT (Kg)
	REDUCTION RATIO	1/40	1/50	1/60	1/75	
	OUTPUT R.P.M	45	36	30	24	

- M5*0.8
- M6* 1
- M8*1.25
- M10*1.5
- M12*1.75
- M16* 2
- M18*2.5
- M20*2.5
- M22*2.5
- M24*3

TOOTH CHAMFERING	MODULE			표기외 일반 공차	표기외 일반 공차	표기외 일반 공차
	5	5-15	15			
HQ, T	C1	0.2	0.5	1.0	1.0	1.0
	C2	1.0	1.5	2.0	2.0	2.0
HC & HQ, I	C1	0.5	1.0	2.0	2.0	2.0
	C2	2.0	3.0	5.0	5.0	5.0

	OUT LINE DWG						
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T
TITLE SPEC.	GEARED MOTOR KV153 1HP 4P I=1/40~1/75		CUSTOMER				
	OUT LINE DWG		STANDARD TYPE				
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2019.07.17	PROJECTION			
CHECKED		REF. No.			REV. No.		
APPROVED		DRAWING No.	KGM-KV153-VT-01-00-00				
 (주) 케이 지 엠 KOREA GEARED MOTOR							

본 도면은 (주)케이 지 엠의
기술 재산입니다. 본 도면
은 지적 재산권 관련 법규
에 의하여 보호되며,
(주)케이 지 엠으로 부터
문서에 의한 승인 없이는
본 도면의 전부 또는 일부
를 복사 또는 배포거나, 타
인에게 누설할 수 없습니다.