

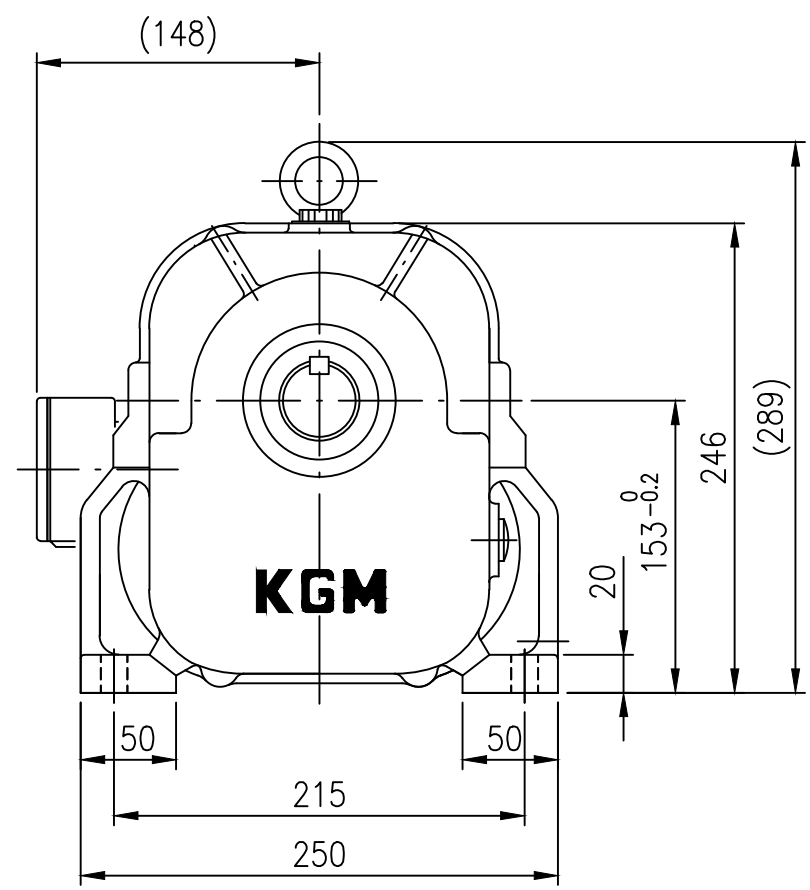


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KF153-K-2HP 4P 삼상

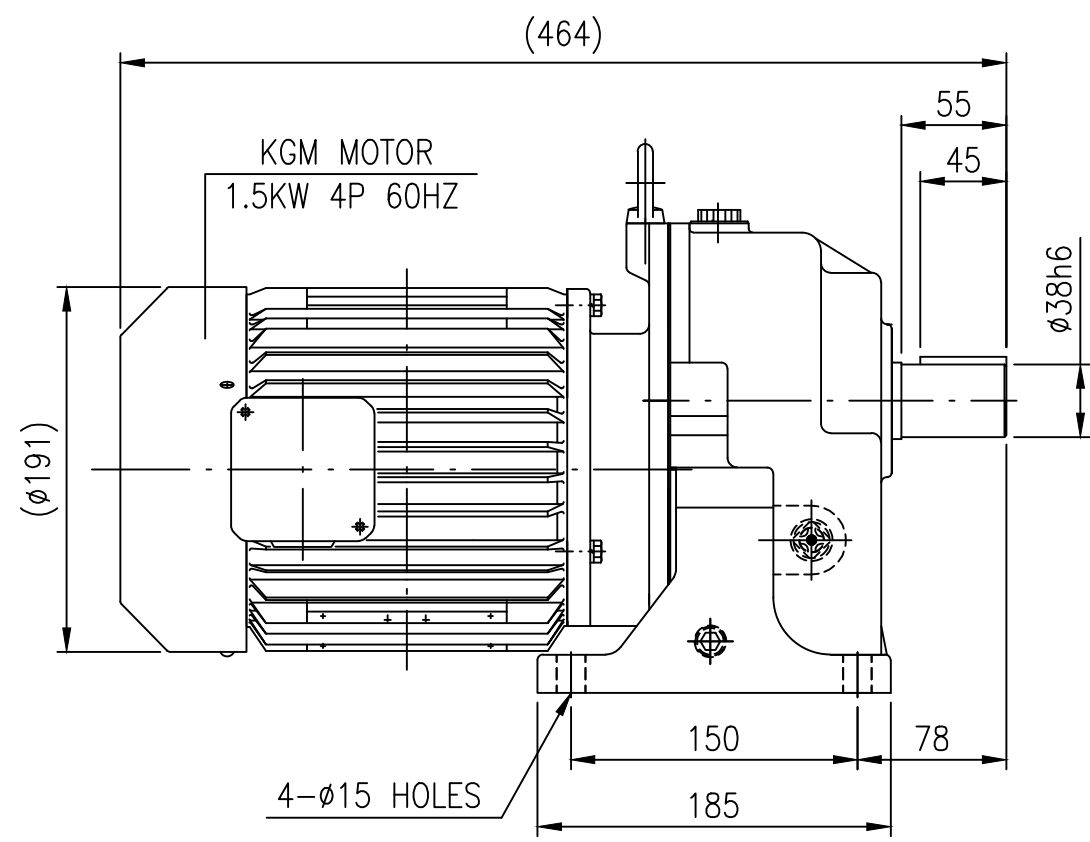

OUTPUT SHAFT

KF153	CAPACITY (Kw)	1.5Kw 4P					WEIGHT (Kg)
	REDUCTION RATIO	1/5	1/10	1/15	1/20	1/30	
	OUTPUT R.P.M	360	180	120	90	60	

TOOTH CHAMFERING	MODULE			F	15/°E	1.65-2.35°M	표기외 일반 공차
	5	5-15	15				
HQ, T	C1	0.2	0.5	1.0	각도 : ±0.2°	6 - 30 : ±0.1	CHAMFER: C1.0 30 - 120: ±0.15
	C2	1.0	1.5	2.0			
HC & HQ. I	C1	0.5	1.0	2.0	Fillet: R1.0 120 - 315 : ±0.2	315 - 1000 : ±0.3	마무리: ▽ 1000 이상 : ±0.5
	C2	2.0	3.0	5.0			

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
KF153 GEARED MOTOR			CUSTOMER				
KGM MOTOR 2HP 4P I=1/5~1/30			STANDARD TYPE				
OUT LINE DWG							
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2019.09.07	PROJECTION	1		
CHECKED		REF. No.					
APPROVED		DRAWING No.	KGM-KF153-HT-02-00-00				

- M5*0.8
- M6* 1
- M8*1.25
- M10*1.5
- M12*1.75
- M16* 2
- M18*2.5
- M20*2.5
- M22*2.5
- M24*3



(주) 케이 지 엠
KOREA GEARED MOTOR