

NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KF172-K-5HP 4P

A




B

C

D

E

F

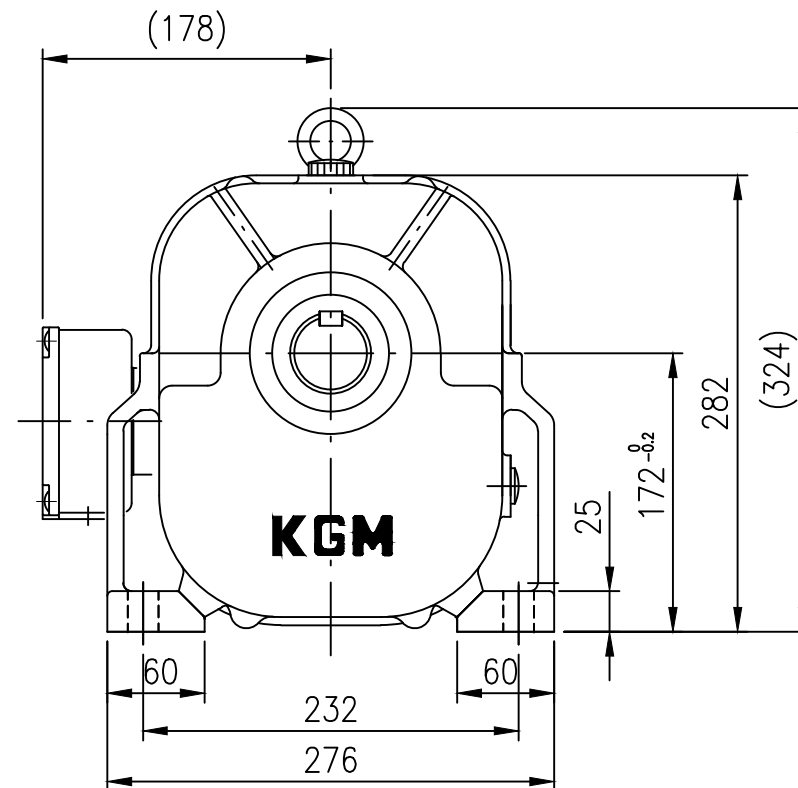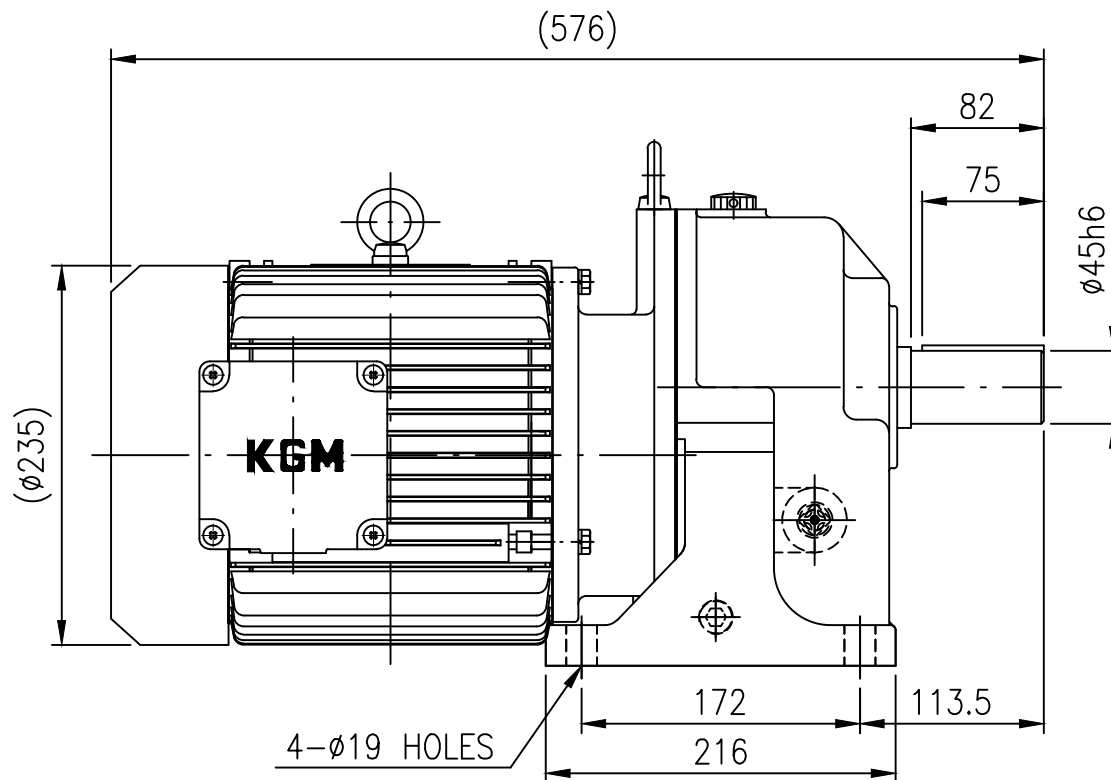

OUTPUT SHAFT

(주)MAX.TORQUE; 38.0Kg-m이하로 사용

KF172	CAPACITY (Kw)	3.7Kw 4P	WEIGHT (Kg)
	REDUCTION RATIO	1/30	
	OUTPUT R.P.M	60	

TOOTH CHAMFERING	MODULE			표기외 일반 공차	본 도면은 (주)케이지엠의 기밀 재산입니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2° 6 - 30 : ±0.1° 30 - 120 : ±0.15° 120 - 315 : ±0.2° 315 - 1000 : ±0.3° 1000 이상 : ±0.5°
	C2	1.0	1.5	2.0	
HC & HQ. I	C1	0.5	1.0	2.0	1.0mm 1.5mm 1.85-2.35mm 15° 15°
	C2	2.0	3.0	5.0	
M=8(R0.1-1M) M=8-15(R0.3M) M=15(R0.3M)					

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

	OUT LINE DWG								
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KF172 GEARED MOTOR			CUSTOMER STANDARD TYPE					
	KGM MOTOR 5HP 4P I=1/30								
	OUT LINE DWG								
DRAWN	KSS	SCALE	1 / 1		UNIT	mm			
DESIGN	YHH	DATE	2019.11.11		PROJECTION				
CHECKED		REF. No.				REV. No.			
APPROVED		DRAWING No.	KGM-KF172-HT-05-30-0D						
 (주) 케이 지 엠 KOREA GEARED MOTOR									