

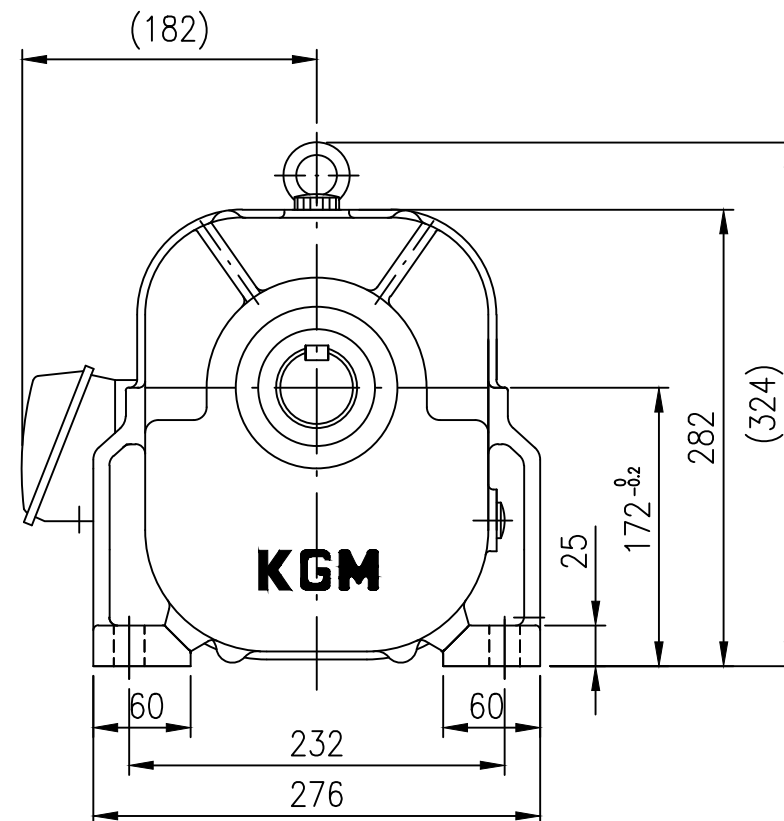


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KF172-5HP 4P

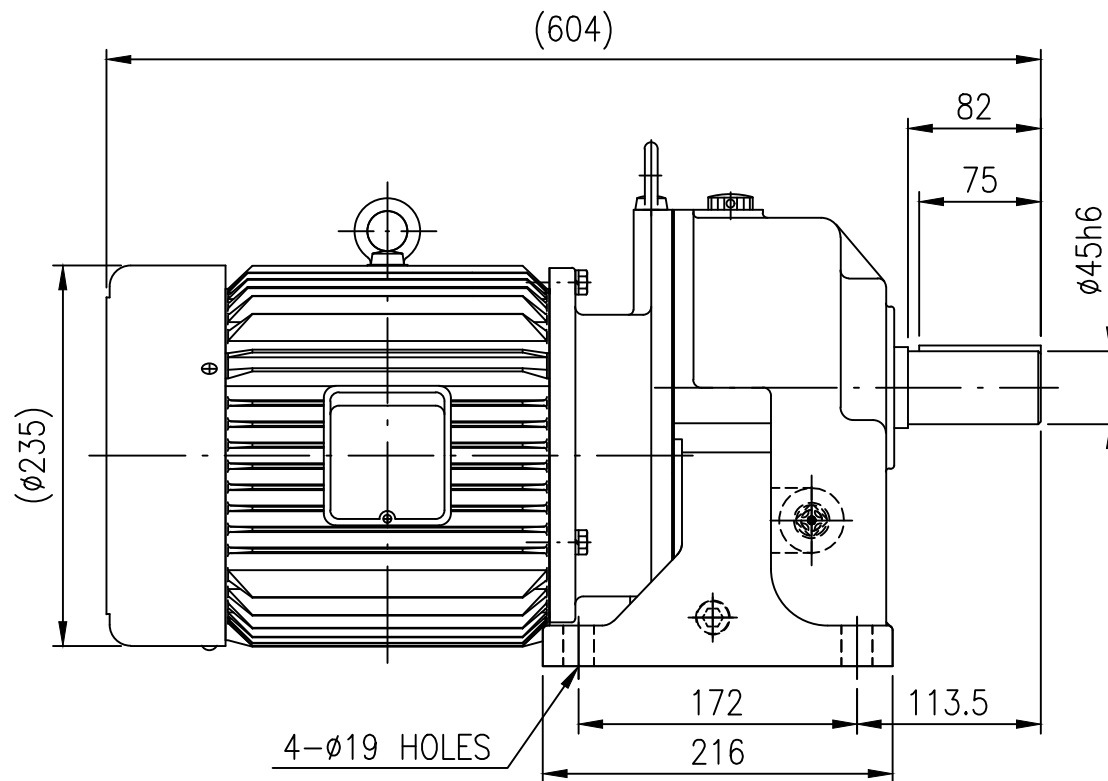

OUTPUT SHAFT

(주)MAX.TORQUE; 38.0Kg-m이하로 사용

KF172	CAPACITY (Kw)	3.7Kw 4P	WEIGHT (Kg)
	REDUCTION RATIO	1/30	
	OUTPUT R.P.M	60	

TOOTH CHAMFERING	MODULE			표기외 일반 공차	본 도면은 (주)케이지엠의 기밀 자산입니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2° 6 - 30 : ±0.1° 30 - 120 : ±0.15° 120 - 315 : ±0.2° 315 - 1000 : ±0.3° 1000 이상 : ±0.5°
	C2	1.0	1.5	2.0	
HC & HQ. I	C1	0.5	1.0	2.0	CHAMFER: C1.0 1.0 - 2.0 : ±0.2° 2.0 - 3.0 : ±0.3° 3.0 - 5.0 : ±0.5° 5.0 이상 : ±0.5°
	C2	2.0	3.0	5.0	

	OUT LINE DWG								
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.			GEARED MOTOR KF172 5HP 4P IE3 I=1/30 OUT LINE DWG		CUSTOMER STANDARD TYPE				
DRAWN	KSS	SCALE		1 / 1	UNIT	mm			
DESIGN	YHH	DATE		2019.08.09	PROJECTION				
CHECKED		REF. No.			REV. No.				
APPROVED		DRAWING No.		KGM-KF172-HT-05-30-0D					
			(주) 케이지엠 KOREA GEARED MOTOR						



(주) 케이 지 엠
KOREA GEARED MOTOR

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3