

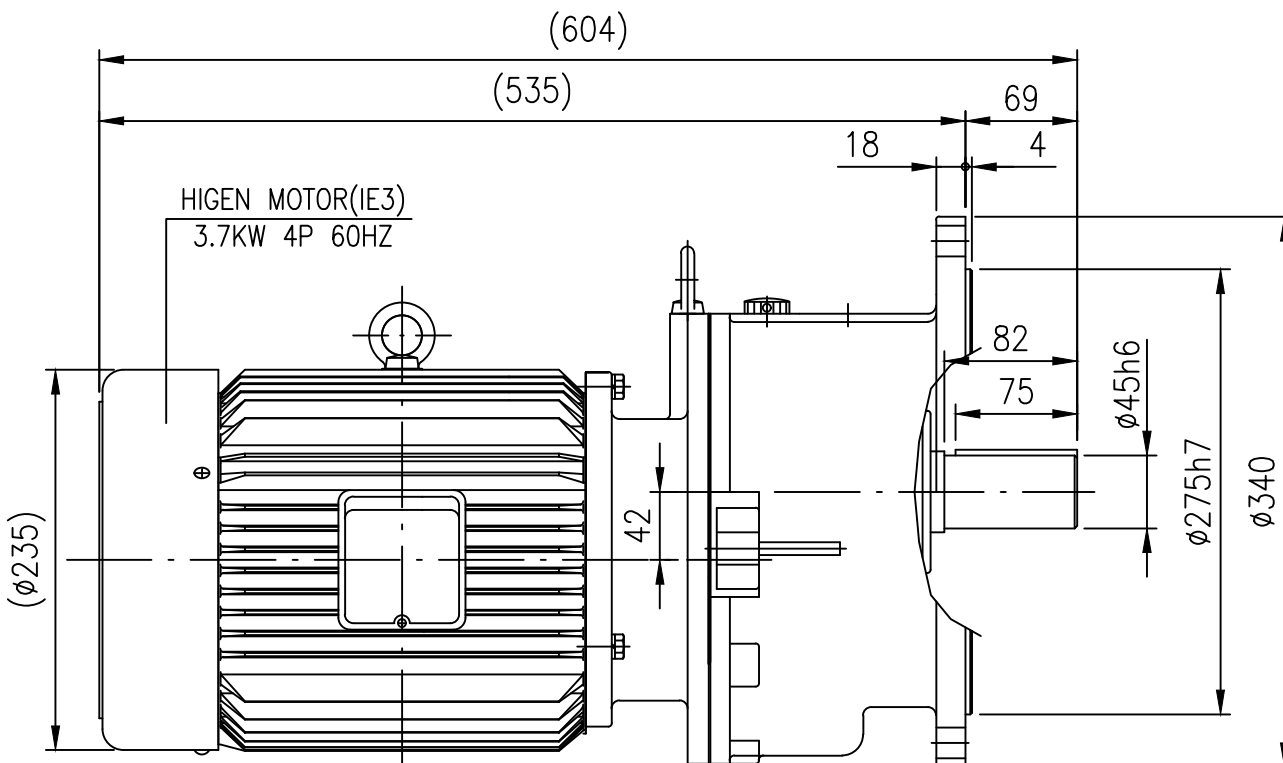


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					



KV172-5HP 4P

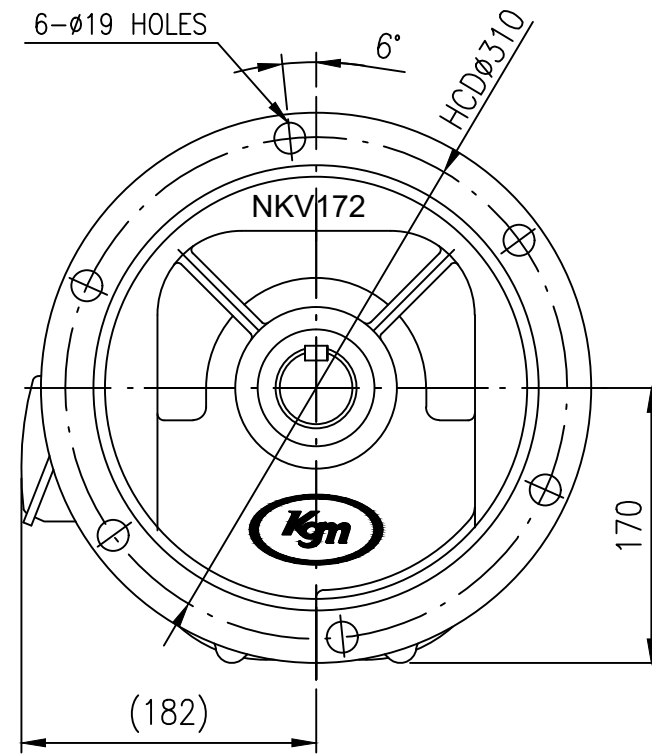

OUTPUT SHAFT

KV172	CAPACITY (Kw)	3.7Kw 4P				WEIGHT (Kg)
	REDUCTION RATIO	1/5	1/10	1/15	1/20	
	OUTPUT R.P.M	360	180	120	90	

TOOTH CHAMFERING	MODULE			TOOTH CHAMFERING	TOOTH CHAMFERING	TOOTH CHAMFERING
	5	5-15	15			
HQ. T	C1	0.2	0.5	1.0	1.0	1.0
	C2	1.0	1.5	2.0		
HC & HQ. I	C1	0.5	1.0	2.0	1.0	1.0
	C2	2.0	3.0	5.0		

표기외 일반 공차		표기외 일반 공차
각도 : ±0.2°	6 - 30 : ±0.1	
CHAMFER: C1.0	30 - 120 : ±0.15	
FILLET: R1.0	120 - 315 : ±0.2	
마무리 : ▽	315 - 1000 : ±0.3	
	1000 이상 : ±0.5	

OUT LINE DWG		SPECIFICATION		MAT'L		Q'TY		W/T		REMARK	
No.	DESCRIPTION	SPECIFICATION		MAT'L		Q'TY		W/T		REMARK	
TITLE		GEARED MOTOR		CUSTOMER		1 / 1		UNIT		mm	
SPEC.		KV172 5HP 4P IE3 =1/5~1/20		STANDARD TYPE		DATE		PROJECTION		REV. No.	
DRAWN		KSS		SCALE		2019.07.11		PROJECTION		REV. No.	
DESIGN		YHH		DATE		2019.07.11		PROJECTION		REV. No.	
CHECKED				REF. No.		DRAWING No.		KGM-KV172-VT-05-00-00		REV. No.	
APPROVED				DRAWING No.		KGM-KV172-VT-05-00-00		REV. No.		REV. No.	

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3