

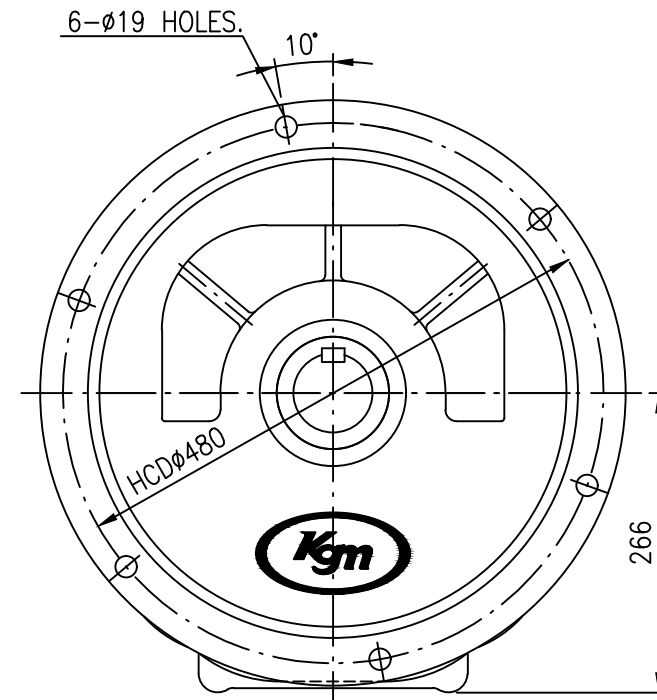


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KV270+V172-3HP 4P

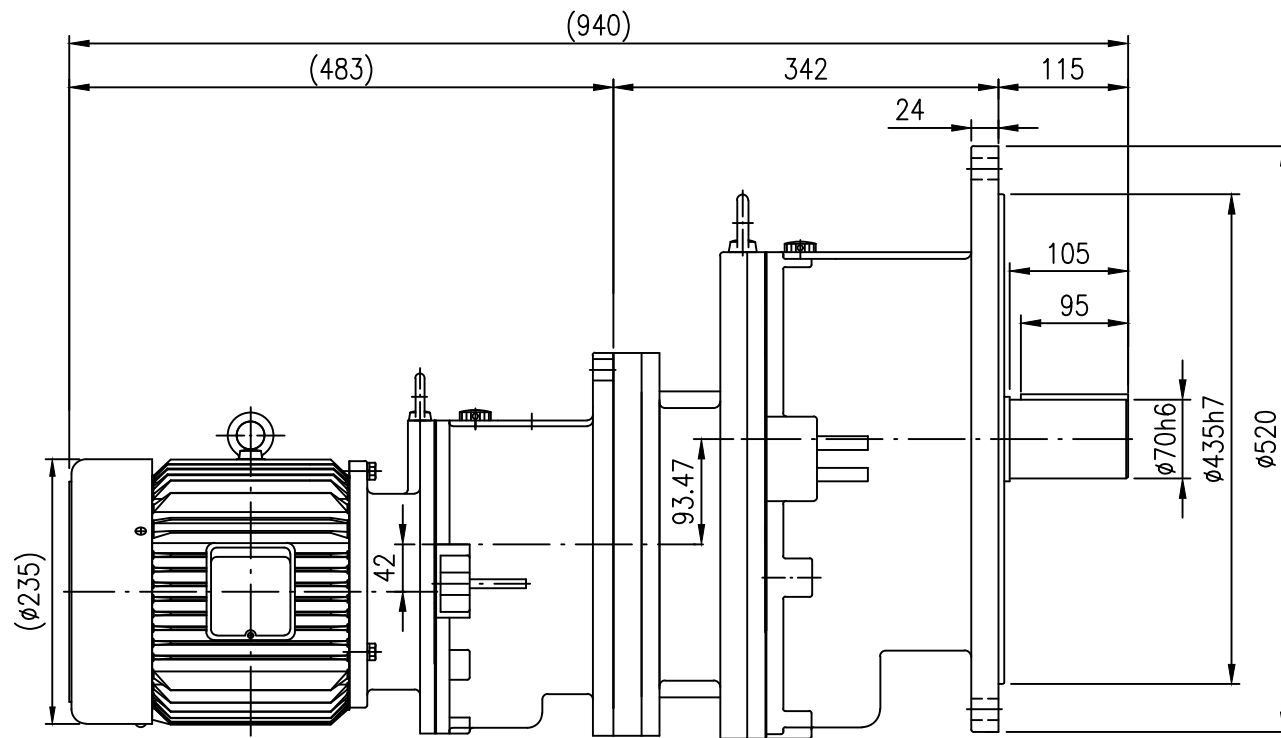

(주)MAX.TORQUE이하로 사용



OUTPUT SHAFT

HIGH RATIO KV172 +KV270	CAPACITY (Kw)	2.2KW		WEIGHT (kg) 202
	REDUCTION RATIO	1/150	1/200	
	OUTPUT R.P.M	12	9	
	Max.TORQUE Kgf.m	147	147	

TOOTH CHAMFERING	MODULE			표기외 일반 공차	본 도면은 (주)케이지엠의 기밀로 지정됩니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이는 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2° 6 - 30 : ±0.1
	C2	1.0	1.5	2.0	CHAMFER: C1.0 30 - 120 : ±0.15
	C1	0.5	1.0	2.0	FILLET: R1.0 120 - 315 : ±0.2
	C2	2.0	3.0	5.0	마무리 : ▽ 315 - 1000 : ±0.3
HC & HQ. I	C1	0.5	1.0	2.0	1000 이상 : ±0.5
	C2	2.0	3.0	5.0	

OUT LINE DWG						
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	HIGH RATIO GEARED MOTOR V172+KV270 3HP 4P RATIO=1/150~1/200		CUSTOMER STANDARD TYPE			
	DRAWN	KSS	SCALE	1 / 1	UNIT	mm
DESIGN	YHH	DATE	2018.04.05	PROJECTION	1st	
CHECKED		REF. No.			REV. No.	
APPROVED		DRAWING No.	KGM-KV270+V172-VT-03-00-000			
		(주) 케이지엠				
		KOREA GEARED MOTOR				



(주) 케이 지 엠
KOREA GEARED MOTOR

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3