

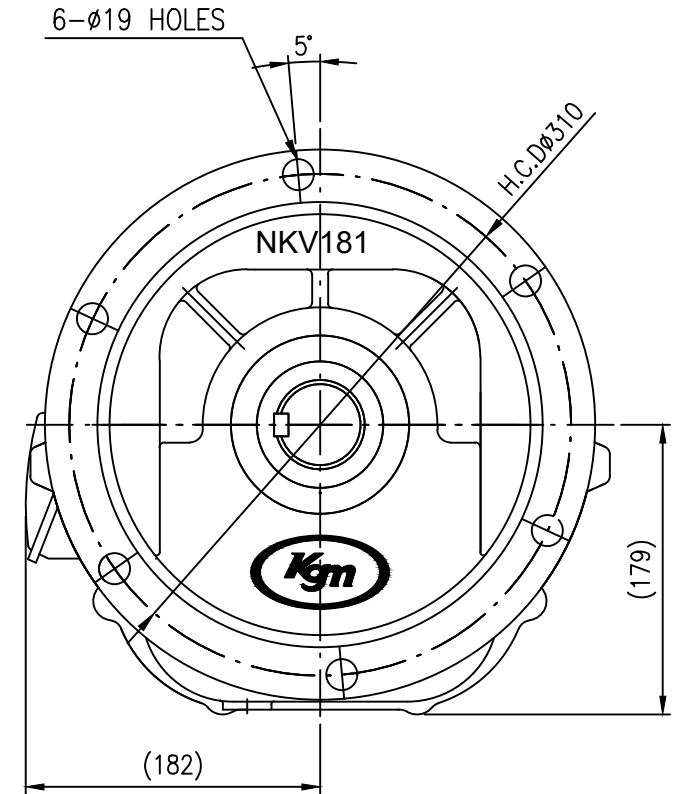


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KV181-5HP 4P

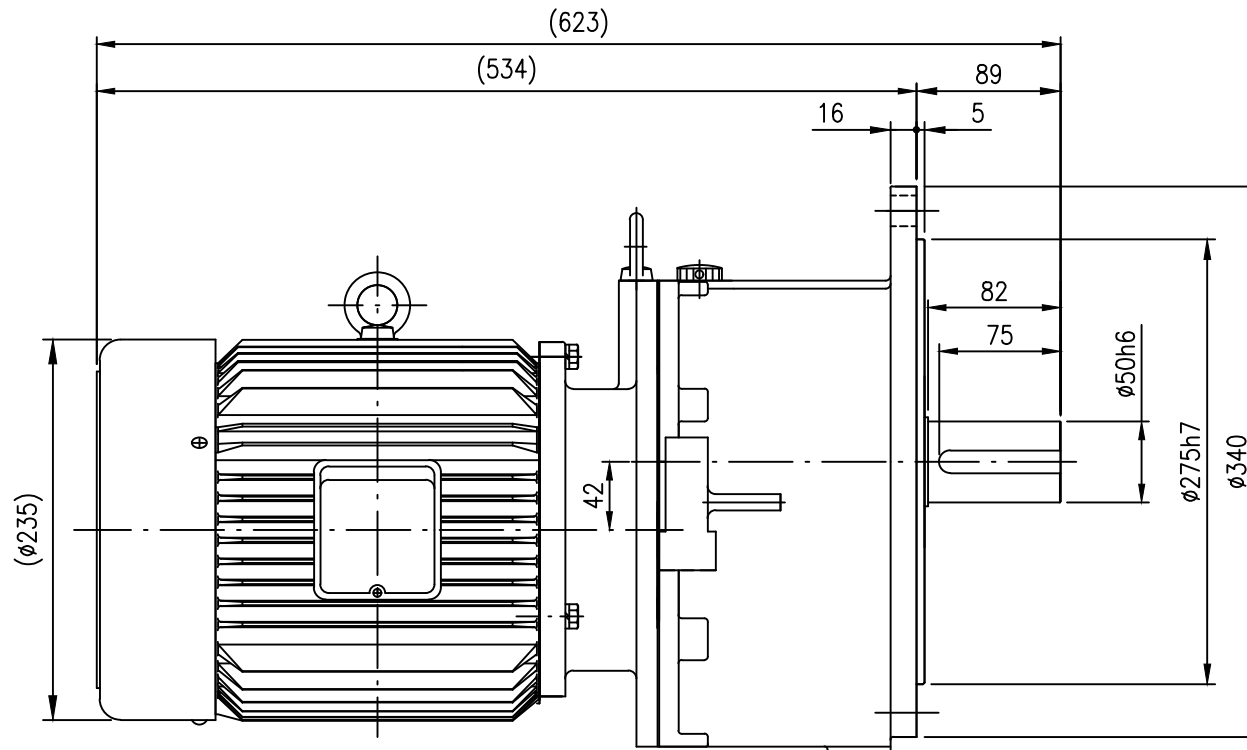

OUTPUT SHAFT

(주)MAX.TORQUE; 57.2Kg-m이하로 사용

KV181	CAPACITY (Kw)	3.7Kw 4P		WEIGHT (kg)
	REDUCTION RATIO	1/40	1/50	
	OUTPUT R.P.M	45	36	

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

TOOTH CHAMFERING	MODULE			표기외 일반 공차	본 도면은 (주)케이지엠의 기밀 재산입니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2° 6 - 30 : ±0.1° 30 - 120 : ±0.15° 120 - 315 : ±0.2° 315 - 1000 : ±0.3° 1000 이상 : ±0.5°
	C2	1.0	1.5	2.0	
HC & HQ. I	C1	0.5	1.0	2.0	CHAMFER: C1.0 1.85-2.35T 1.0° 15°
	C2	2.0	3.0	5.0	
				M=8(R0.1-1M)	M=8-15(R0.3M)
				M=15(R0.3M)	

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	GEARED MOTOR		CUSTOMER				
	KV181 5HP 4P IE3 I=1/40~1/50		STANDARD TYPE				
OUT LINE DWG							
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2019.08.12	PROJECTION			
CHECKED		REF. No.		REV. No.			
APPROVED		DRAWING No.	KGM-KV181-VT-05-00-00				
 (주) 케이 지 엠 KOREA GEARED MOTOR							