


F

OUTPUT SHAFT



TOOTH CHAMFERING		MODULE					표기법 및 일반 공차	
		0.5	5-15	15				
HQ. T	C1	0.2	0.5	1.0			각도 : $\pm 0.2^\circ$ 6 - 30 : ± 0.1	
	C2	1.0	1.5	2.0			CHAMFER: C1.0 30 - 120 : ± 0.15	
HC & HQ. I	C1	0.5	1.0	2.0			FILLET: R1.0 120 - 315 : ± 0.2	
	C2	2.0	3.0	5.0			머리무:  315 - 1000 : ± 0.3	
					M=8(R0.1-1M)	M=8-15(R0.3M)	M=15(R0.3M)	1000 이상 : ± 0.5

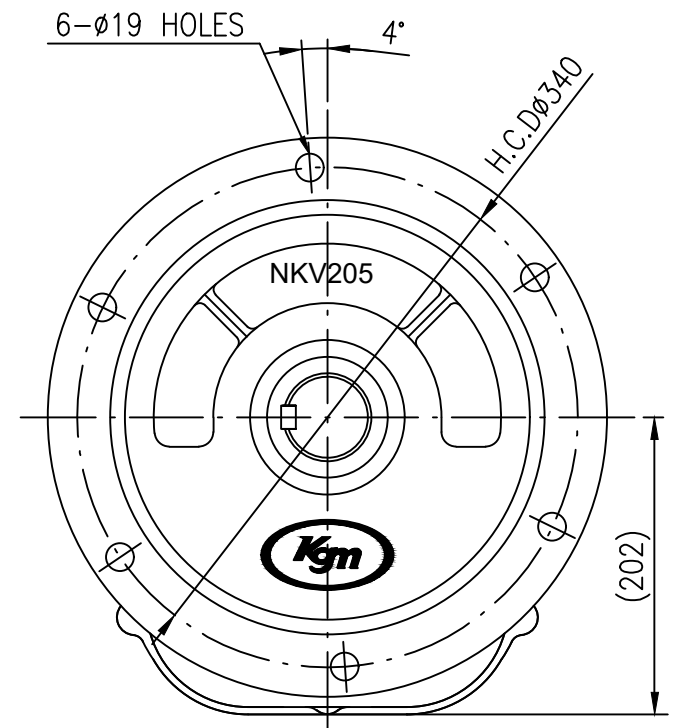

No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK			
TITLE SPEC.	<u>KV205 GEARED MOTOR</u> KGM MOTOR 3HP 4P I=1/90~1/120		CUSTOMER STANDARD TYPE						
	OUTLINE DWG								
DRAWN	KSS	SCALE	1 / 1	UNIT	mm				
DESIGN	YHH	DATE	2019.08.17	PROJECTION					
CHECKED		REF. No.				REV. No.			
APPROVED		DRAWING No.	KGM-KV205-VT-03-0D-000						
(주) 케이지엠 KOREA GEARED MOTOR									