

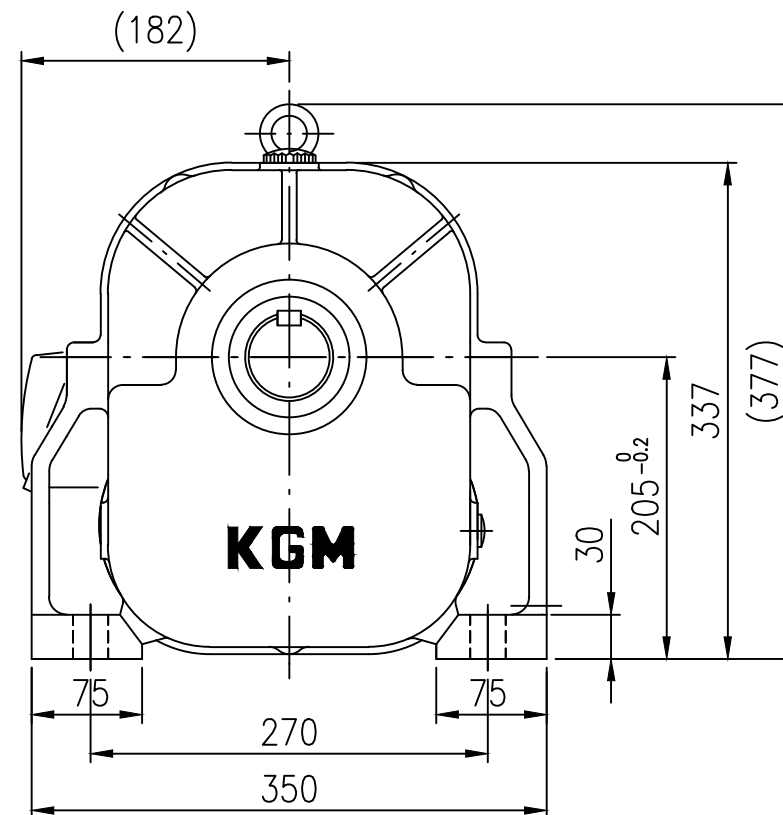


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KF205-5HP 4P

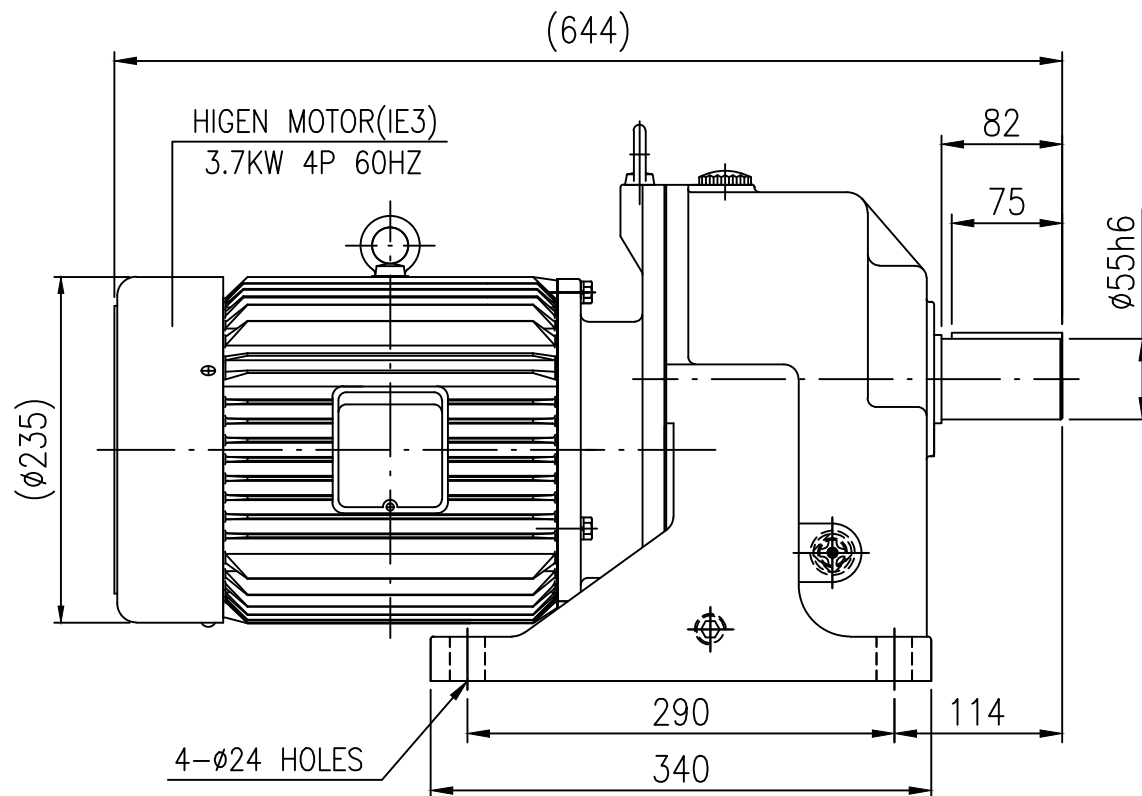

OUTPUT SHAFT

KF205	CAPACITY (Kw)	3.7Kw 4P		WEIGHT (Kg)
	REDUCTION RATIO	1/40	1/50	
	OUTPUT R.P.M	45	36	

TOOTH CHAMFERING	H.Q. T	MODULE			표기외 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이는 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
		5	5-15	15		
C1	0.2	0.5	1.0		각도 : ±0.2°	6 - 30 : ±0.1
	C2	1.0	1.5	2.0	CHAMFER: C1.0	30 - 120 : ±0.15
C1	0.5	1.0	2.0		FILLET: R1.0	120 - 315 : ±0.2
	C2	2.0	3.0	5.0	마무리: ▽	315 - 1000 : ±0.3
HC & H.Q. I		M=8(R0.1-1M)			1000 이상 : ±0.5	

	OUT LINE DWG							
No.	DESCRIPTION		SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.		GEARED MOTOR		CUSTOMER				
		KF205 5HP 4P IE3 1=1/40~1/50		STANDARD TYPE				
		OUT LINE DWG						
DRAWN	KSS	SCALE	1 / 1	UNIT	mm			
DESIGN	YHH	DATE	2019.11.15	PROJECTION				
CHECKED		REF. No.			REV. No.			
APPROVED		DRAWING No.	KGM-KF205-HT-05-00-00					
 (주) 케이 지 엠								
KOREA GEARED MOTOR								

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3