

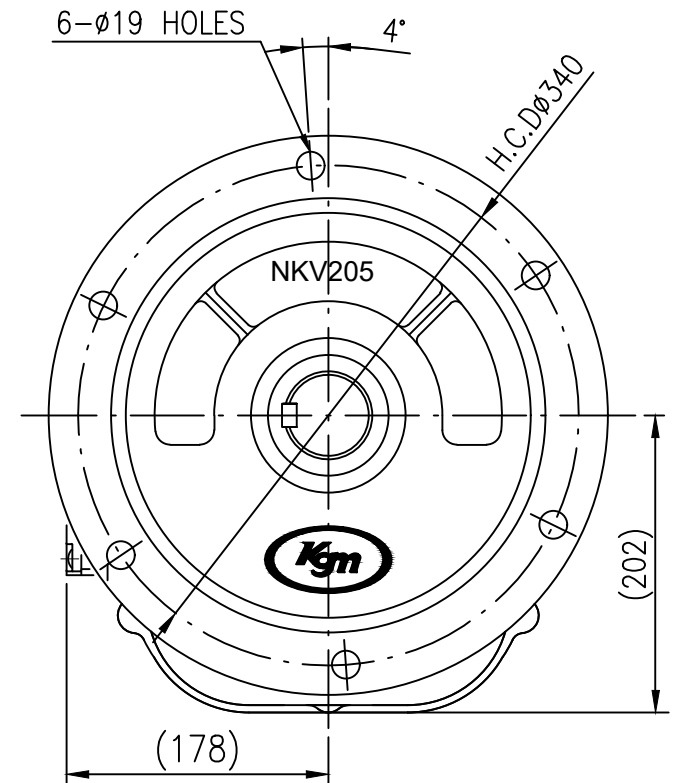


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KV205-K-5HP 4P

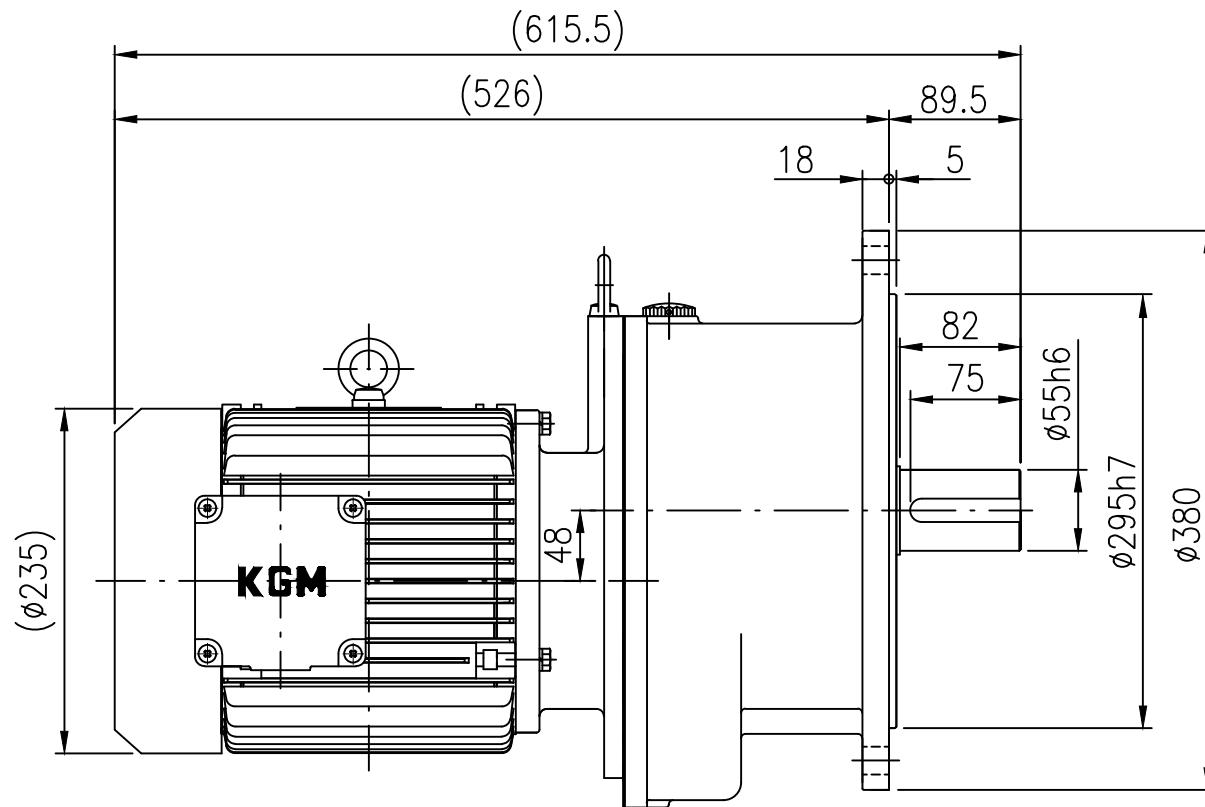

OUTPUT SHAFT

(주)MAX.TORQUE ;95Kg-m 이하로 사용.

KV205	CAPACITY (Kw)	3.7Kw 4P	WEIGHT (Kg)
	REDUCTION RATIO	1/60	
	OUTPUT R.P.M	30	

TOOTH CHAMFERING	MODULE			표기외 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이는 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2° 6 ~ 30 : ±0.1 30 ~ 120 : ±0.15 120 ~ 315 : ±0.2 315 ~ 1000 : ±0.3 1000 이상 : ±0.5
	C2	1.0	1.5	2.0	
HC & HQ. I	C1	0.5	1.0	2.0	CHAMFER: C1.0 30 ~ 120 : ±0.15 FILLET: R1.0 120 ~ 315 : ±0.2
	C2	2.0	3.0	5.0	
M=8(R0.1-1M)				M=8-15(R0.3M)	M=15(R0.3M)

OUTLINE DWG							
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T REMARK
TITLE SPEC.	KV205 GEARED MOTOR		CUSTOMER				
	KGM MOTOR 5HP 4P I=1/60		STANDARD TYPE				
OUT LINE DWG							
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YH	DATE	2020.10.29	PROJECTION			
CHECKED		REF. No.			REV. No.		
APPROVED		DRAWING No.	KGM-KV205-VT-05-60-0D				
 (주) 케이 지 엠 KOREA GEARED MOTOR							

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3