

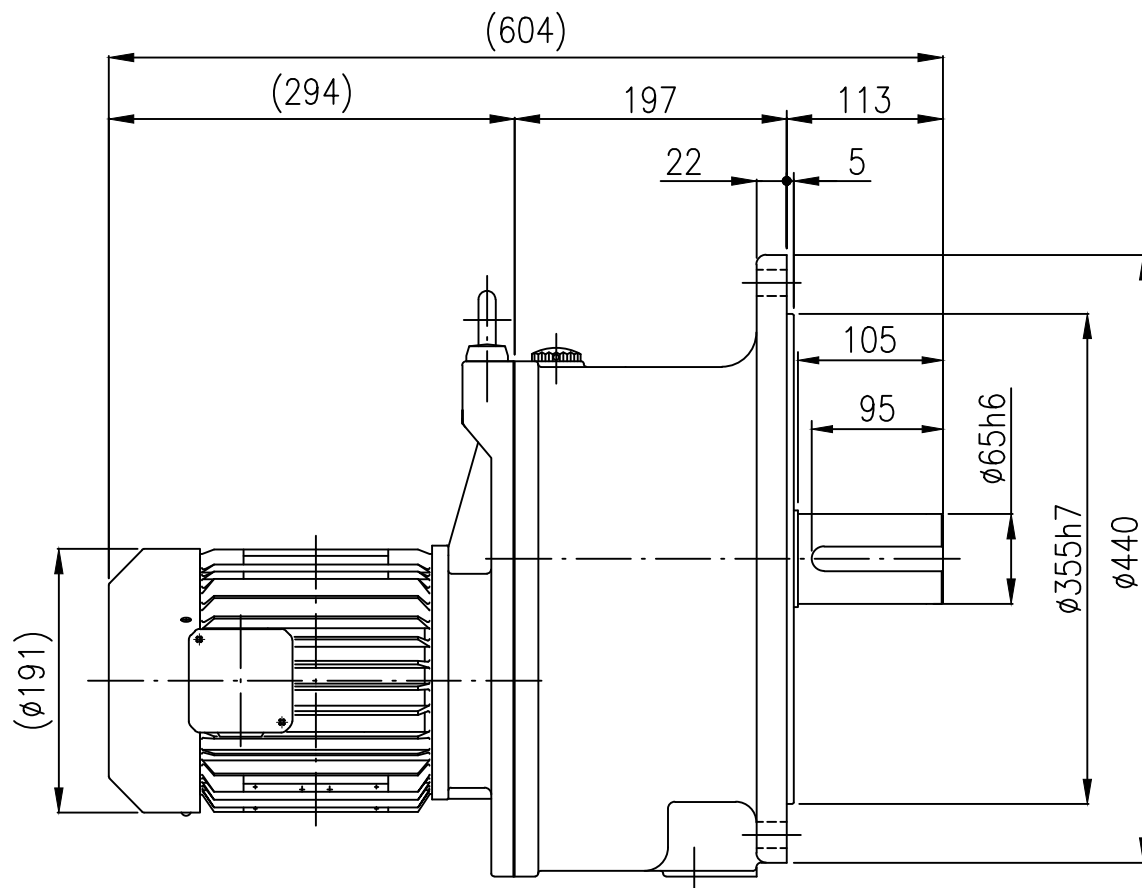


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KV235-K-2HP 4P



6-ø19 HOLES

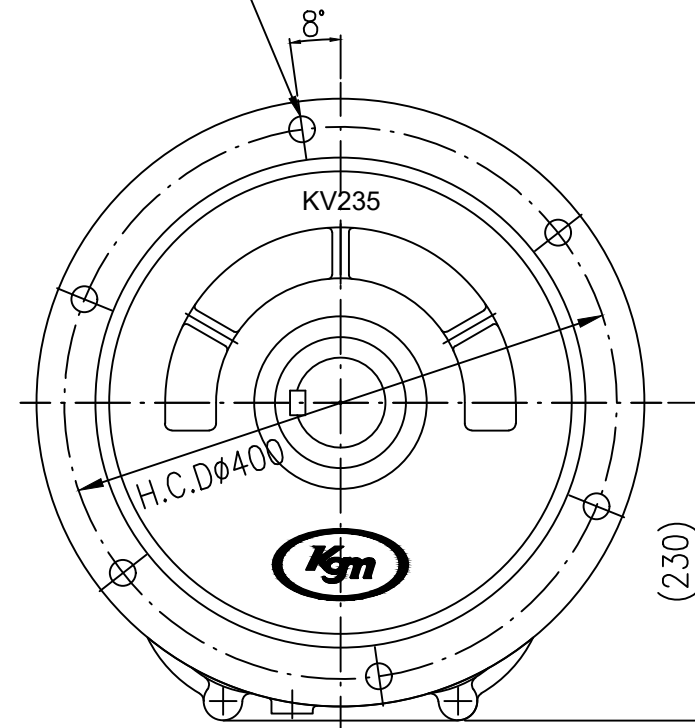

OUTPUT SHAFT

(주)MAX.TORQUE; 110Kg-m이하로 사용

KV235	CAPACITY (Kw)	1.5Kw 4P		WEIGHT (kg)
	REDUCTION RATIO	1/100	1/120	
	OUTPUT R.P.M	18	15	
				118

TOOTH CHAMFERING	MODULE			표기외 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2°
	C2	1.0	1.5	2.0	6 - 30 : ±0.1
					CHAMFER: C1.0
					30 - 120 : ±0.15
					FILLET: R1.0
					120 - 315 : ±0.2
					마무리: ▽
					315 - 1000 : ±0.3
					1000 이상 : ±0.5
HC & HQ. I	C1	0.5	1.0	2.0	
	C2	2.0	3.0	5.0	
					M=8(R0.1-1M)
					M=8-15(R0.3M)
					M=15(R0.3M)

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

	OUTLINE DWG								
No.	DESCRIPTION		SPECIFICATION		MAT'L		Q'TY	W/T	REMARK
TITLE SPEC.	KV235 GEARED MOTOR				CUSTOMER				
	KGM MOTOR 2HP 4P I=1/100-1/120				STANDARD TYPE				
	OUT LINE DWG								
DRAWN	KSS	SCALE		N / S		UNIT		mm	
DESIGN	YHH	DATE		2020.10.23		PROJECTION			
CHECKED		REF. No.						REV. No.	
APPROVED		DRAWING No.		KGM-KV235-VT-02-00-000					
		(주) 케이지엠							
		KOREA GEARED MOTOR							



(주) 케이 지 엠
KOREA GEARED MOTOR