

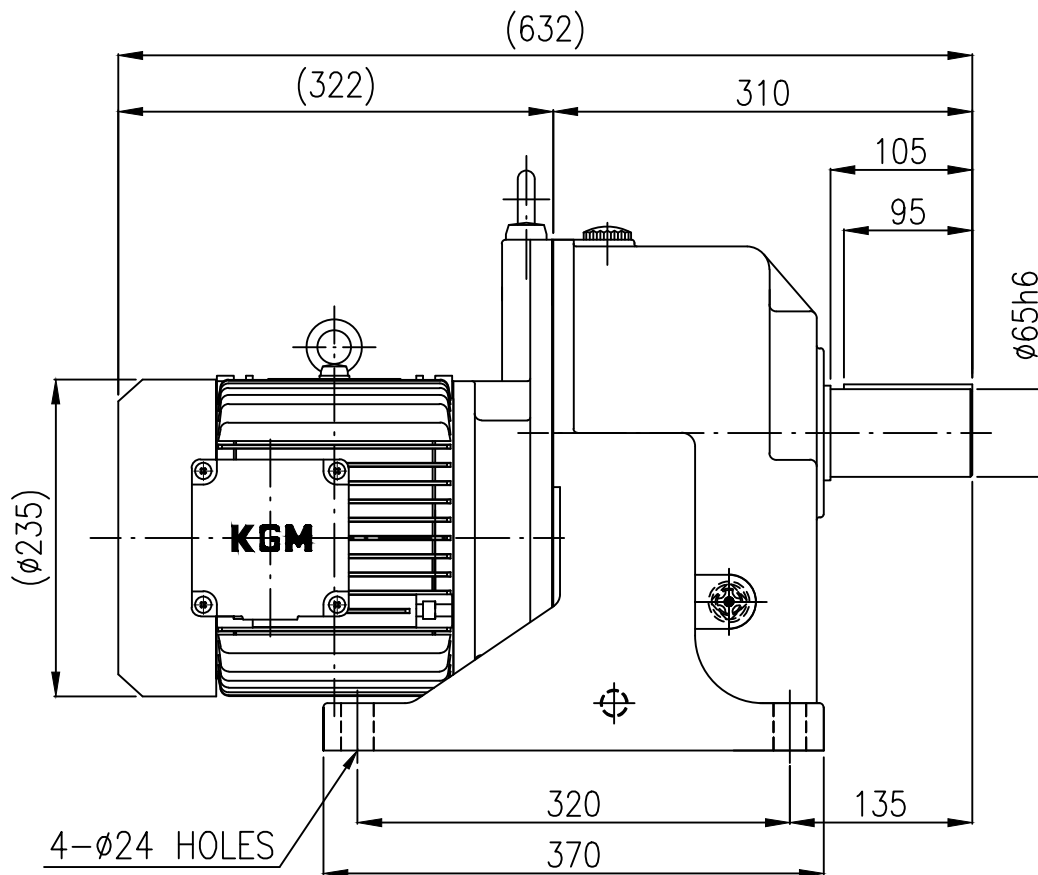


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					



KF235-K-3HP 4P

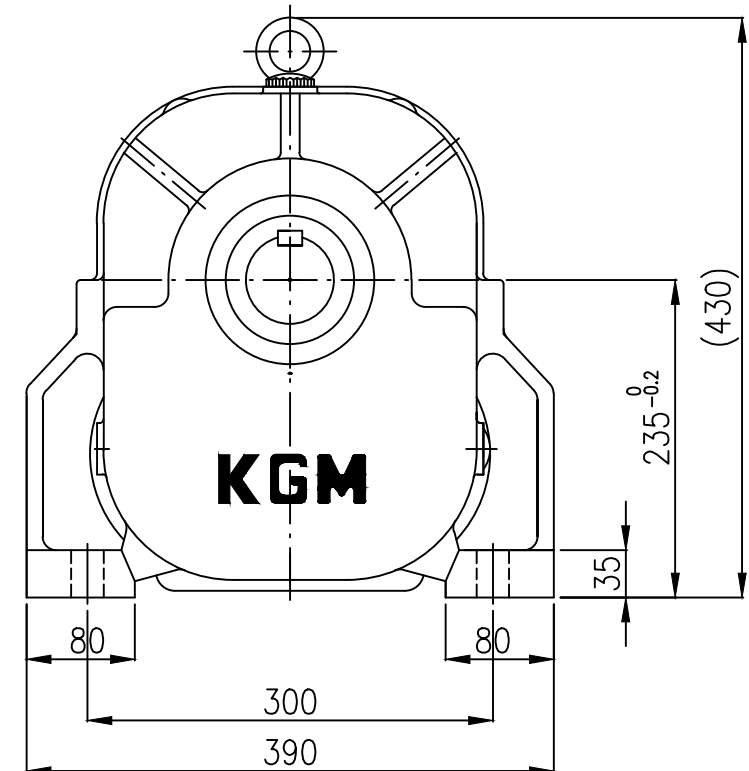

OUTPUT SHAFT

(주)MAX.TORQUE; 110Kg-m이하로 사용

KF235	CAPACITY (Kw)	2.2Kw 4P			WEIGHT (Kg)
	REDUCTION RATIO	1/90	1/100	1/120	
	OUTPUT R.P.M	20	18	15	

TOOTH CHAMFERING	MODULE			표기외 일반 공차	본 도면은 (주)케이지엠의 기밀 자산입니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2°
	C2	1.0	1.5	2.0	6 - 30 : ±0.1
					30 - 120 : ±0.15
					120 - 315 : ±0.2
					315 - 1000 : ±0.3
					1000 이상 : ±0.5
HC & HQ. I	C1	0.5	1.0	2.0	CHAMFER: C1.0
	C2	2.0	3.0	5.0	FILLET: R1.0
					마무리: ▽

	OUT LINE DWG						
No.	DESCRIPTION		SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.		KF235 GEARED MOTOR		CUSTOMER STANDARD TYPE			
		KGM MOTOR 3HP 4P l=1/90~1/120					
		OUT LINE DWG					
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2019.09.07	PROJECTION			
CHECKED		REF. No.			REV. No.		
APPROVED		DRAWING No.	KGM-KF235-HT-03-00-000				
		(주) 케이지엠					
		KOREA GEARED MOTOR					



(주) 케이 지 엠
KOREA GEARED MOTOR

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3