

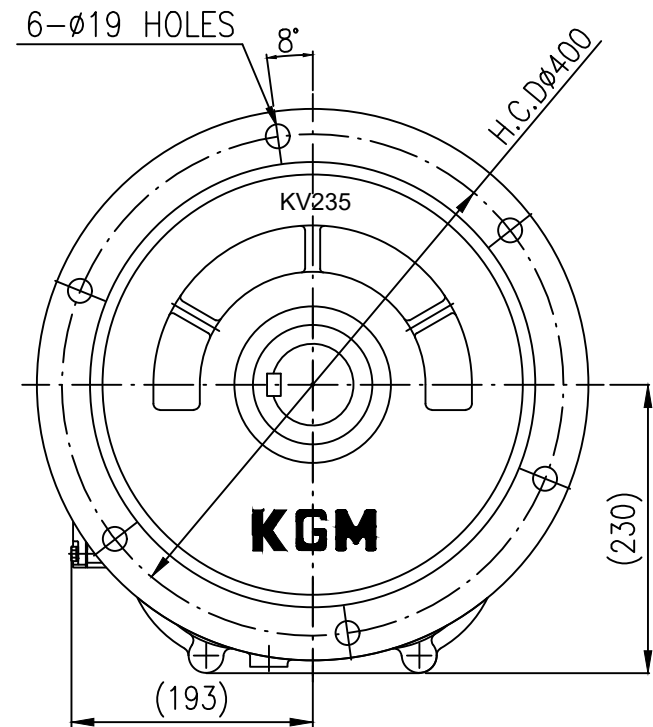


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KV235-K-7.5HP 4P

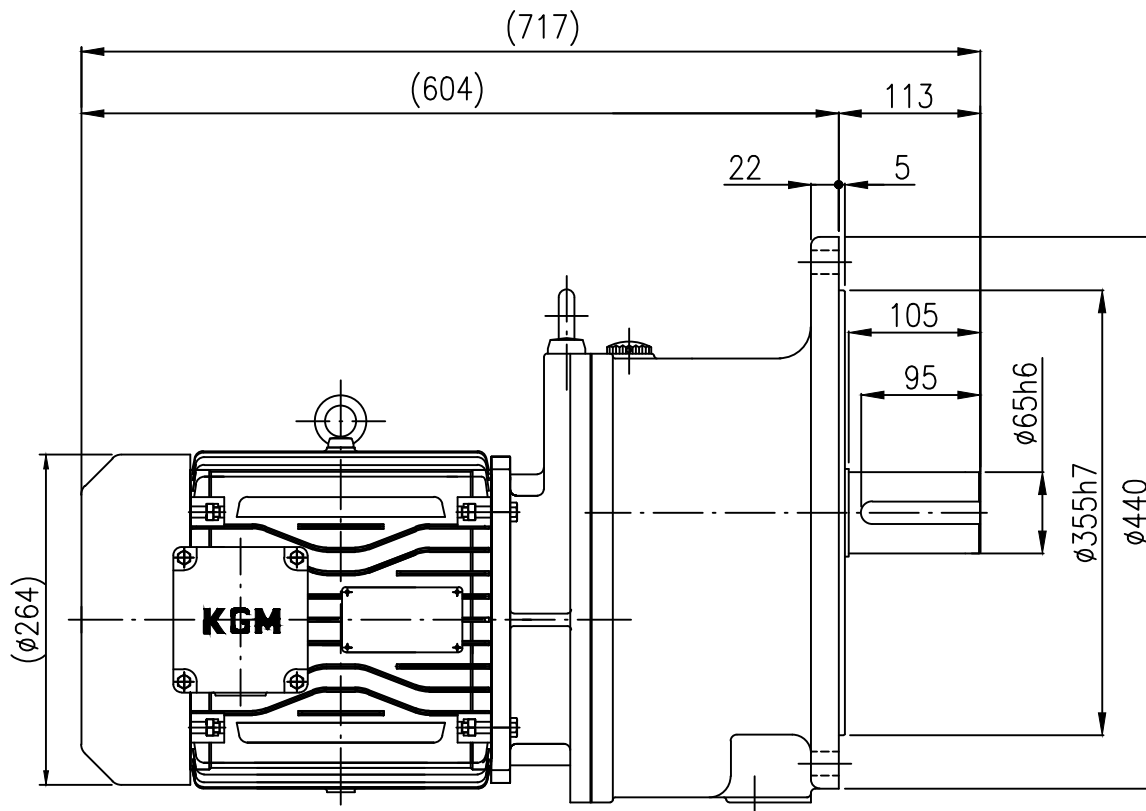

OUTPUT SHAFT

(주) MAX.TORQUE; 138.5Kg-m이하로 사용

KV235	CAPACITY (Kw)	5.5Kw 4P	WEIGHT (Kg)
	REDUCTION RATIO	1/60	
	OUTPUT R.P.M	30	

TOOTH CHAMPERING	MODULE			표기외 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이는 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2° 6 - 30 : ±0.1 30 - 120 : ±0.15 120 - 315 : ±0.2 315 - 1000 : ±0.3 1000 이상 : ±0.5
	C2	1.0	1.5	2.0	
HC & HQ. I	C1	0.5	1.0	2.0	1.0mm 1.85-2.35mm 15° 1.0mm 1.85-2.35mm 15°
	C2	2.0	3.0	5.0	
				M=8(R0.1-1M)	M=8-15(R0.3M)
				M=15(R0.3M)	

	OUT LINE DWG					
No.	DESCRIPTION		SPECIFICATION	MAT'L	Q'TY	W/T
TITLE		KV235 GEARED MOTOR		CUSTOMER		
SPEC.		KGM MOTOR 7.5HP 4P I=1/60		STANDARD TYPE		
		OUT LINE DWG				
DRAWN	KSS	SCALE	N / S	UNIT	mm	
DESIGN	YHH	DATE	2020.11.17	PROJECTION		
CHECKED		REF. No.			REV. No.	
APPROVED		DRAWING No.	KGM-KV235-VT-7.5-60-00			
 (주) 케이 지 엠 KOREA GEARED MOTOR						

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3