

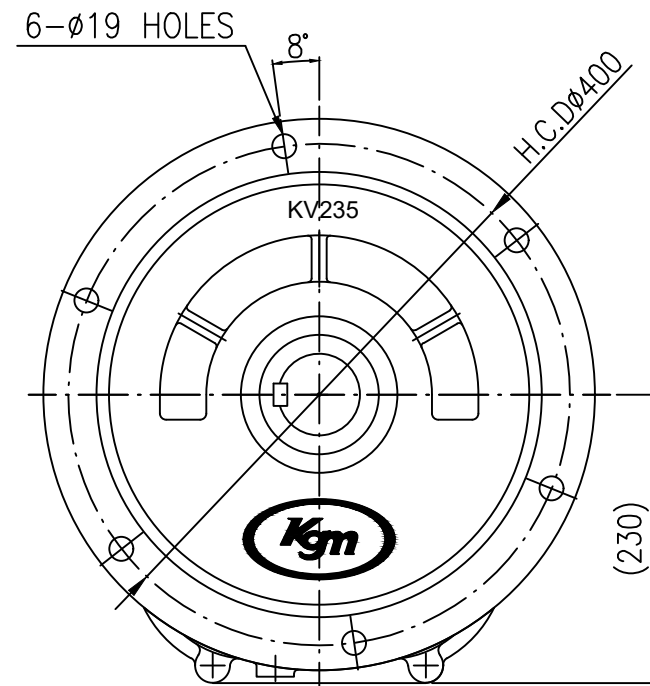


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KV235-10HP 4P

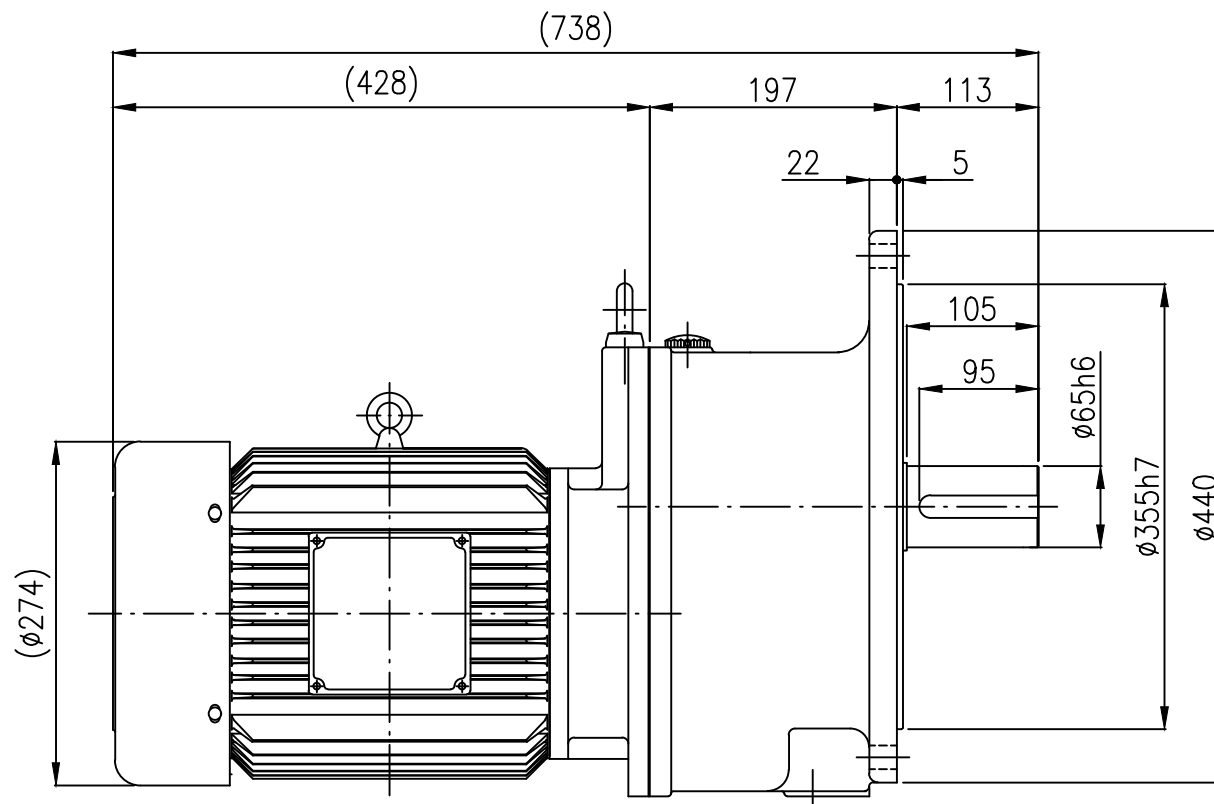

OUTPUT SHAFT

(주)MAX.TORQUE; 139.9Kg-m이하로 사용

KV235	CAPACITY (Kw)	7.5Kw 4P			WEIGHT (Kg)
	REDUCTION RATIO	1/40	1/50	1/60	
	OUTPUT R.P.M	45	36	30	

TOOTH CHAMFERING		MODULE						표기외 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ±0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0				마무리: ▽	315 - 1000 : ±0.3
	C2	2.0	3.0	5.0				M=8(R0.1-1M)	M=8-15(R0.3M)

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.		GEARED MOTOR		CUSTOMER			
		KV235 10HP 4P I=1/40~1/60		STANDARD TYPE			
DRAWN		KSS	SCALE	N / S	UNIT	mm	
DESIGN		YHH	DATE	2019.09.04	PROJECTION	1st	
CHECKED			REF. No.				
APPROVED			DRAWING No.	KGM-KV235-VT-10-00-00	REV. No.	△	

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3