

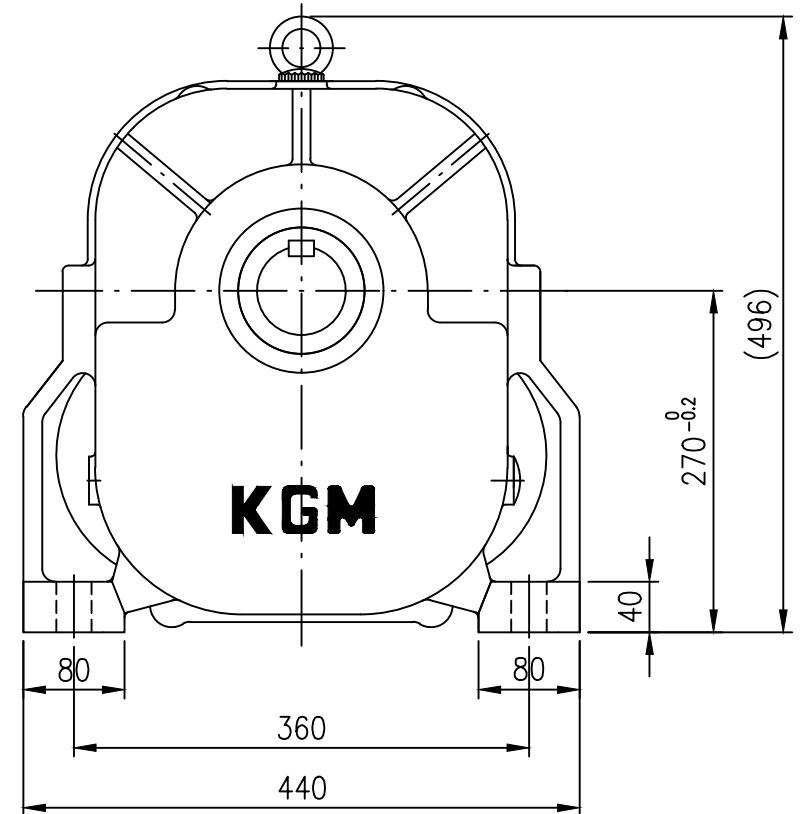


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KF270-K-5HP 4P

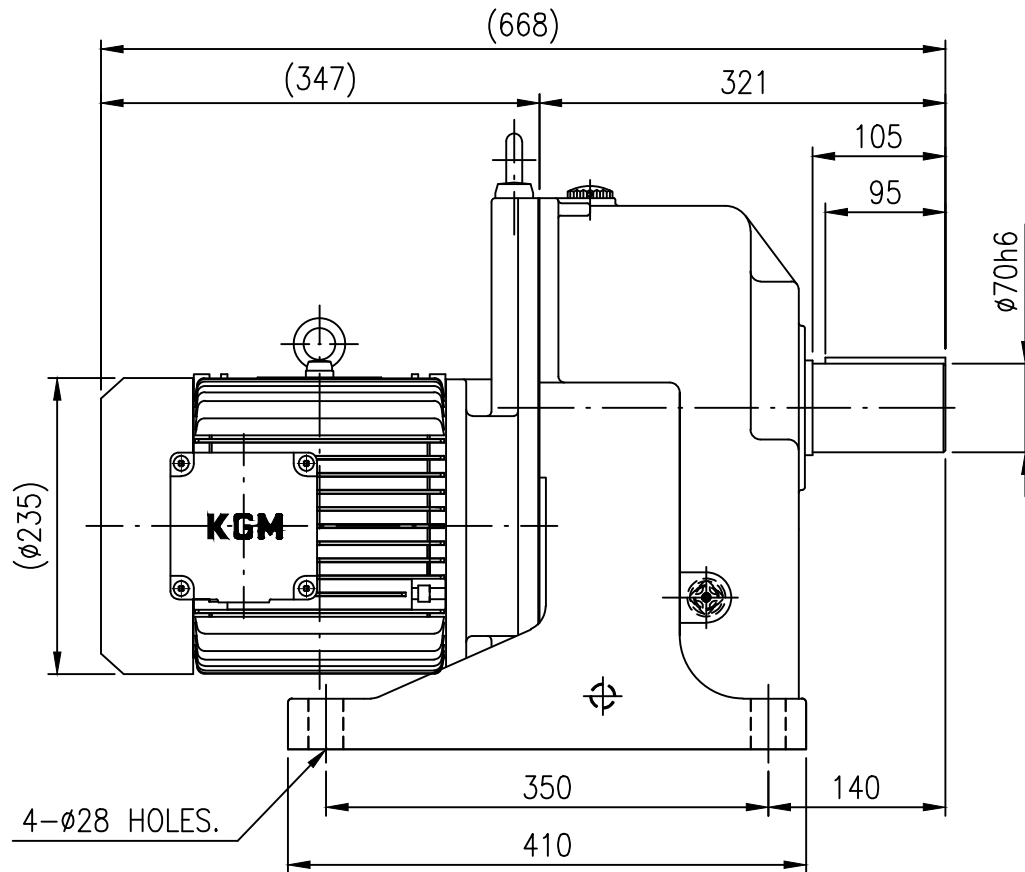

(주)MAX.TORQUE ;169.4Kg-m 이하로 사용.

KF270	CAPACITY (Kw)	3.7Kw 4P		WEIGHT (Kg)
	REDUCTION RATIO	1/100	1/120	
	OUTPUT R.P.M	18	15	

TOOTH CHAMFERING	MODULE			표기 및 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2°
	C2	1.0	1.5	2.0	6 - 30 : ±0.1
	C1	0.2	0.5	1.0	CHAMFER: C1.0
	C2	1.0	1.5	2.0	30 - 120 : ±0.15
	C1	0.5	1.0	2.0	FILLET: R1.0
	C2	2.0	3.0	5.0	120 - 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0	마무리 : ▽
	C2	2.0	3.0	5.0	315 - 1000 : ±0.3
	C1	0.5	1.0	2.0	1000 이상 : ±0.5
	C2	2.0	3.0	5.0	

	OUT LINE DWG							
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.		KF270 GEARED MOTOR		CUSTOMER STANDARD TYPE				
		KGM MOTOR 5HP 4P I=1/100~1/120						
		OUT LINE DWG						
DRAWN	KSS		SCALE	N / S	UNIT	mm		
DESIGN	YHH		DATE	2019.11.12	PROJECTION			
CHECKED			REF. No.			REV. No.		
APPROVED			DRAWING No.	KGM-KF270-HT-05-00-000				
		(주) 케이 지 엠						
		KOREA GEARED MOTOR						

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3