

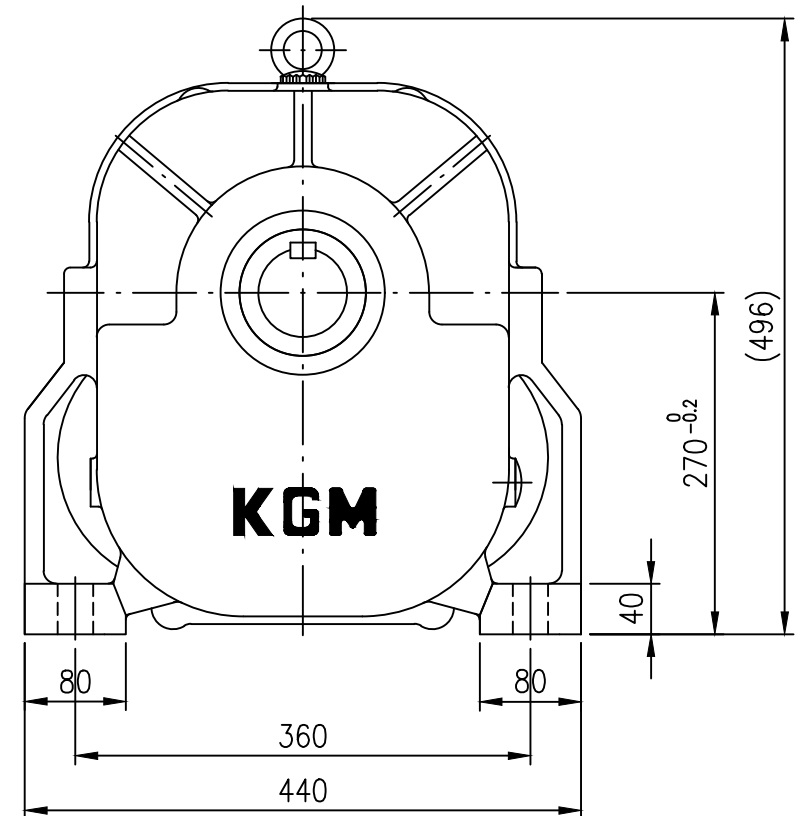


1
2

KF270-5HP 4P

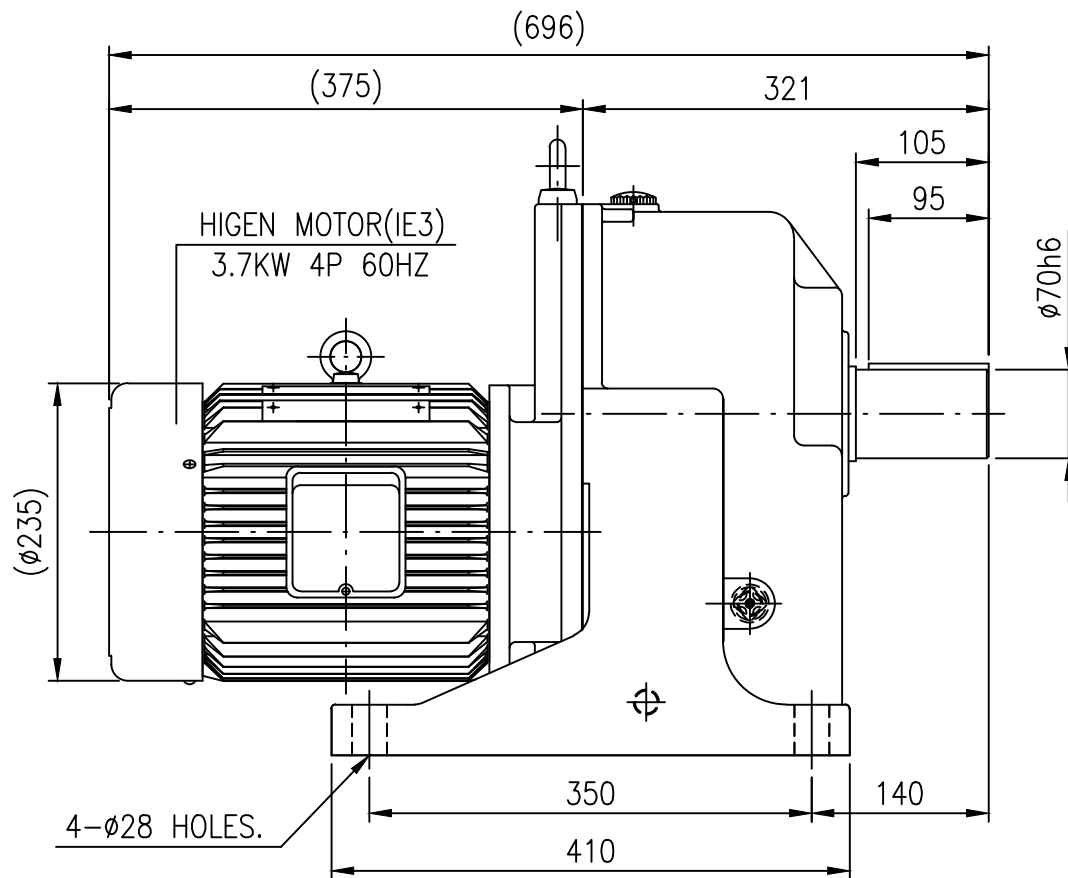

OUTPUT SHAFT

KF270	CAPACITY (Kw)	3.7Kw 4P		WEIGHT (Kg)
	REDUCTION RATIO	1/75	1/90	
	OUTPUT R.P.M	24	20	185

TOOTH CHAMFERING		MODULE						표기법 및 일반 공차	
		0.5	1~15	15				각도 : $\pm 0.2^\circ$	6 - 30 : ± 0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ± 0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ± 0.2
HC & HQ. I	C1	0.5	1.0	2.0				마무리: 	315 - 1000 : ± 0.3
	C2	2.0	3.0	5.0				M<R(0.1-1M)	M=8-15(R0.3M)

	OUT LINE DWG						
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	GEARED MOTOR		CUSTOMER STANDARD TYPE				
	KF270 SHP 4P IE3 I=1/75~1/90						
	OUT LINE DWG						
DRAWN	KSS	SCALE	N / S	UNIT	mm		
DESIGN	YHH	DATE	2019.11.11	PROJECTION			
CHECKED		REF. No.				REV. No.	△
APPROVED		DRAWING No.	KGM-KF270-HT-05-00-00				
		(주) 케이지엠 KOREA GEARED MOTOR					