

--	--

B

C


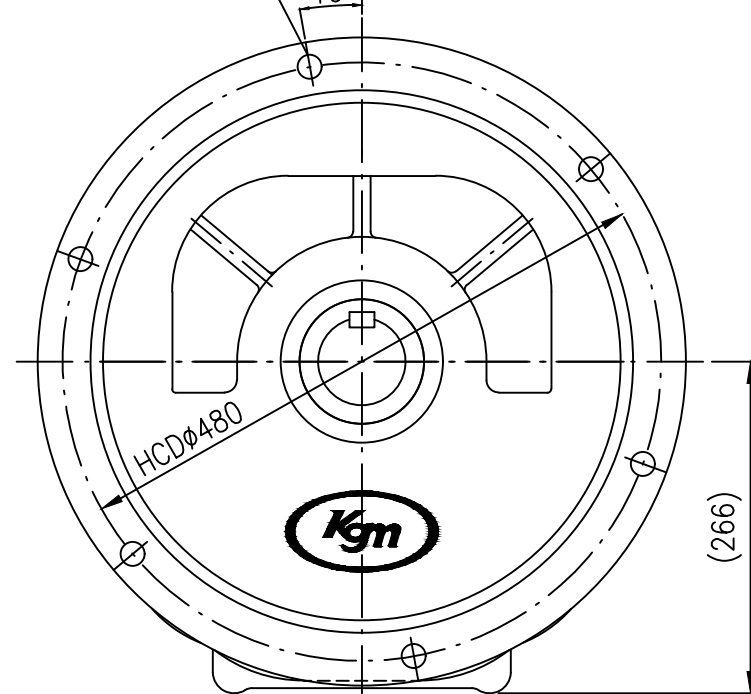
D

F

F

1

OUTPUT SHAFT

 10° 

(주)MAX.TORQUE ; 169.4Kg-m 이하로 사용.

TOOTH CHAMFERING		MODULE						표기와 일반 공차	
		0.5	5-15	15				각도 : $\pm 0.2^\circ$	6 - 30 : ± 0.1
HQ. T	C1	2.0	5.0	1.0				CHAMFER: C1.0	30 - 120 : ± 0.1
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ± 0.1
HC & HQ. I	C1	0.5	1.0	2.0				마무리: 	315 - 1000 : ± 0.1
	C2	2.0	3.0	5.0				M=8(R0.1-1M)	M=8-15(R0.3M)

	OUT LINE DWG								
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK			
TITLE SPEC.	KV270 GEARED MOTOR		CUSTOMER						
	KGM MOTOR 5HP 4P I=1/100-1/120		STANDARD TYPE						
	OUT LINE DWG								
DRAWN	KSS	SCALE	N / S	UNIT	mm				
DESIGN	YHH	DATE	2020.10.29	PROJECTION					
CHECKED		REF. No.				 REV. No.			
APPROVED		DRAWING No.	KGM-KV270-YT-05-00-000						
			(주) 케이지엠 KOREA GEARED MOTOR						