

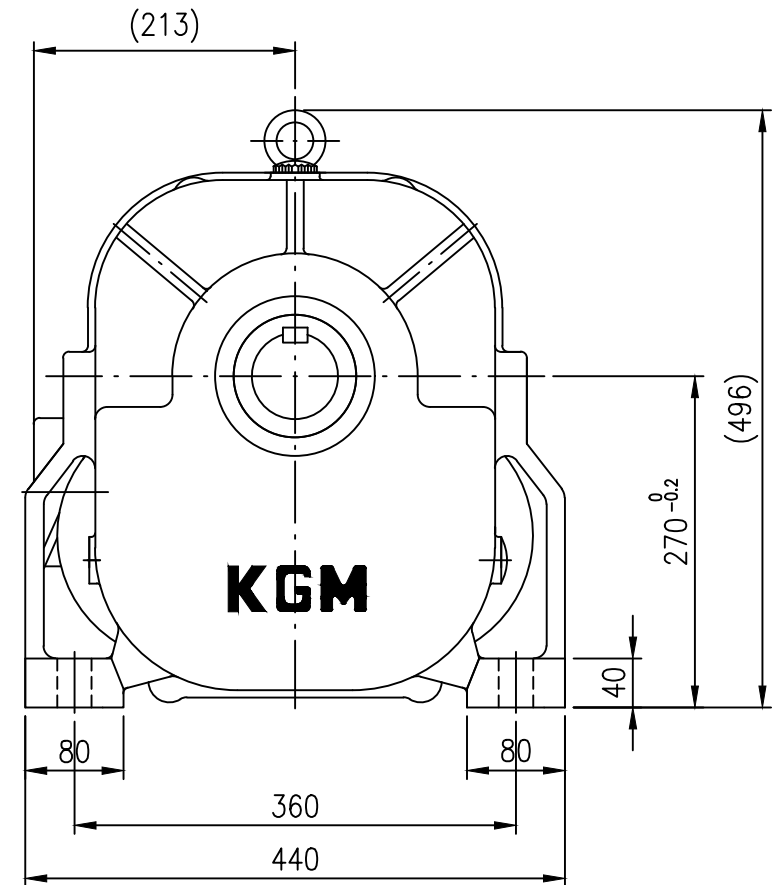


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KF270-7.5HP 4P

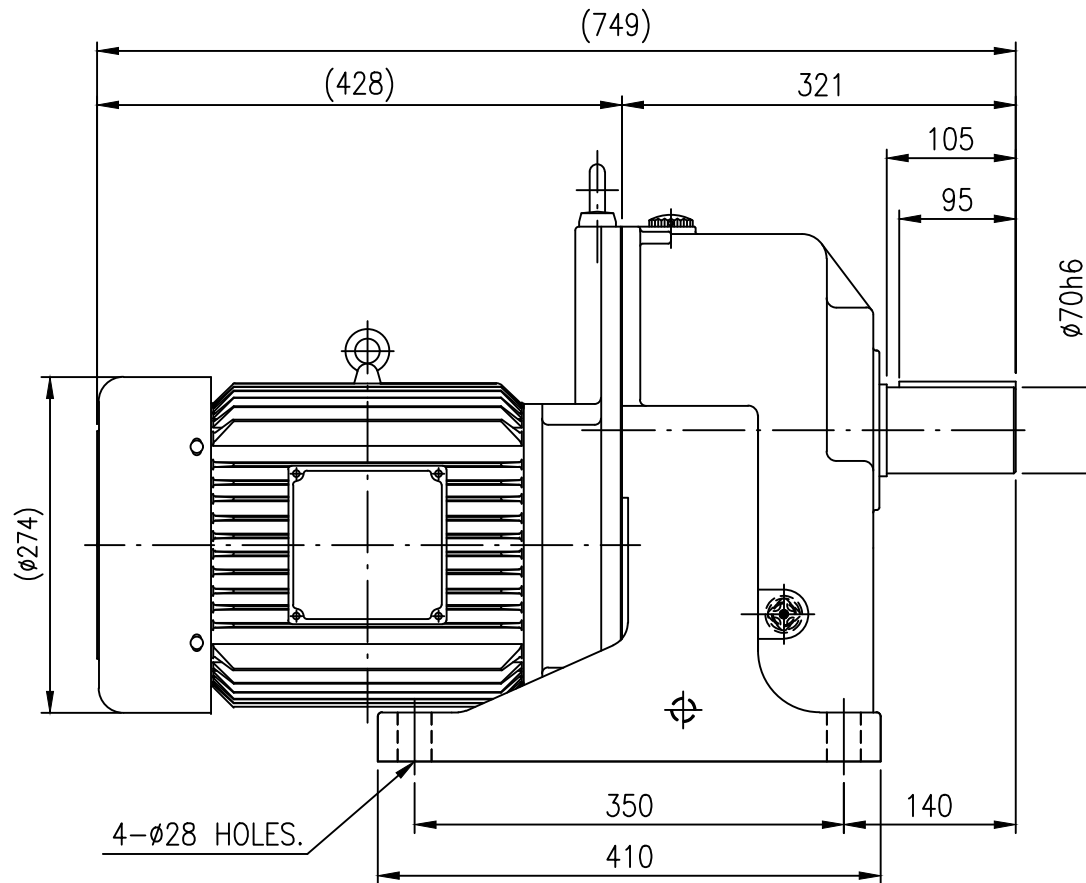

OUTPUT SHAFT

(주)MAX.TORQUE ; 193Kg-m 이하로 사용.

KF270	CAPACITY (Kw)	5.5Kw 4P			WEIGHT (Kg)
	REDUCTION RATIO	1/75	1/90	1/100	
	OUTPUT R.P.M	24	20	18	

TOOTH CHAMFERING	MODULE			표기외 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2° 6 - 30 : ±0.1 30 - 120 : ±0.15 120 - 315 : ±0.2 315 - 1000 : ±0.3 1000 이상 : ±0.5
	C2	1.0	1.5	2.0	
HC & HQ. I	C1	0.5	1.0	2.0	1.0mm 1.85-2.35mm 15° 15°
	C2	2.0	3.0	5.0	
M=8(R0.1-1M) M=8-15(R0.3M) M=15(R0.3M)					

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	GEARED MOTOR		CUSTOMER				
	KF270 7.5HP 4P IE3 1=1/75~1/100		STANDARD TYPE				
OUT LINE DWG							
DRAWN	KSS	SCALE	N / S	UNIT	mm		
DESIGN	YHH	DATE	2019.09.06	PROJECTION			
CHECKED	REF. No.					REV. No.	
APPROVED	DRAWING No.		KGM-KF270-HT-7.5-00-00				
		(주) 케이 지 엠					
		KOREA GEARED MOTOR					

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3