


[illegible]

6-Ø19 HOLES.

10

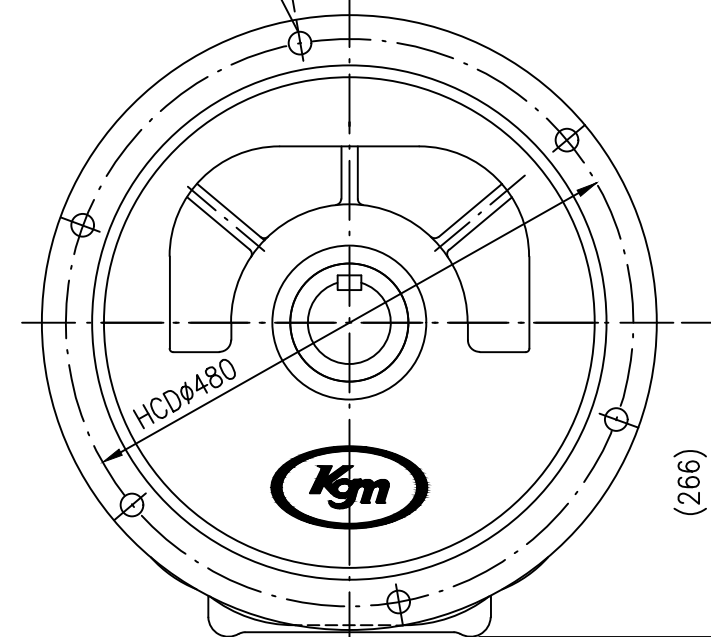

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

KV270	CAPACITY (Kw)	5.5Kw 4P			WEIGHT (Kg)
	REDUCTION RATIO	1/75	1/90	1/100	
	OUTPUT R.P.M	24	20	18	220

TOOTH CHAMFERING		MODULE					표기와 일반 공차
		5	5-15	15			
HQ. T	C1	0.2	0.5	1.0			각도 : ±0.2°
	C2	1.0	1.5	2.0			CHAMFER: C1.0
HC & HQ. I	C1	0.5	1.0	2.0			6 - 30 : ±0.1
	C2	2.0	3.0	5.0			CHAMFER: C1.0
	C1	2.0	3.0	5.0	M≤R(R0.1~1M)	M≤R15(R0.3~3M)	120 - 315 : ±0.2
	C2	2.0	3.0	5.0	M≤R(R0.1~1M)	M≤R15(R0.3~3M)	315 - 1000 : ±0.3
							마무리: 1/100 (일반) : ±0.5

	OUT LINE DWG								
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK			
TITLE SPEC.	GEARED MOTOR KV270 7.5HP 4P IE3 I=1/75-1/100		CUSTOMER						
	OUT LINE DWG		STANDARD TYPE						
DRAWN	KSS	SCALE	N / S	UNIT	mm				
DESIGN	YHH	DATE	2019.09.06	PROJECTION					
CHECKED		REF. No.					REV. No.		
ARRORVED		DRAWING No.	KGM-KV270-VT-7.5-00-00						
 (주) 케이지엠 KOREA GEARED MOTOR									