


1	
2	

6- $\phi 19$ HOLES. 10°

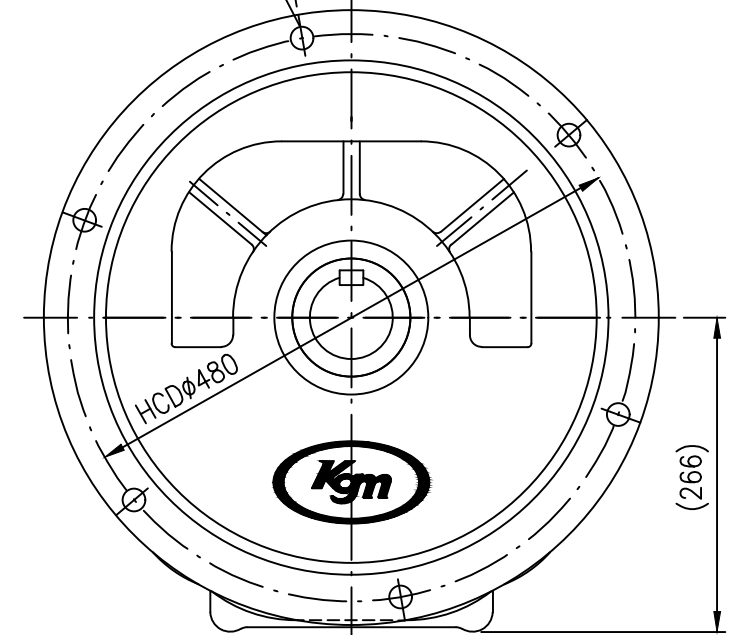

KV270	CAPACITY (Kw)	7.5Kw 4P	WEIGHT (Kg)
	REDUCTION RATIO	1/60	
	OUTPUT R.P.M	30	220

TOOTH CHAMFERING		MODULE					표기법 및 일반 공차
		5	5-15	15			
HQ. T	C1	0.2	0.5	1.0			각도 : $\pm 0.2^\circ$
	C2	1.0	1.5	2.0			CHAMFER: C1.0 30 - 120: ± 0.15
HC & HQ. I	C1	0.5	1.0	2.0			FILLET: R1.0 120 - 315 : ± 0.2
	C2	2.0	3.0	5.0			마무리:  315 - 1000 : ± 0.3
				M-8(R0.1-1M)	M-8-15(R0.3M)	M-15(R0.3M)	1000 이상 : ± 0.5

	OUT LINE DWG						
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KV270 GEARED MOTOR KGM MOTOR 10HP 4P 1=1/60		CUSTOMER				
	OUT LINE DWG		STANDARD TYPE				
DRAWN	KSS	SCALE	N / S	UNIT	mm		
DESIGN	YHH	DATE	2020.11.19	PROJECTON	 		
CHECKED		REF. No.			REV. No.		
APPROVED		DRAWING No.	KGM-KV270-VT-10-60-OD				
 (주) 케이지엠 KOREA GEARED MOTOR							

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3