

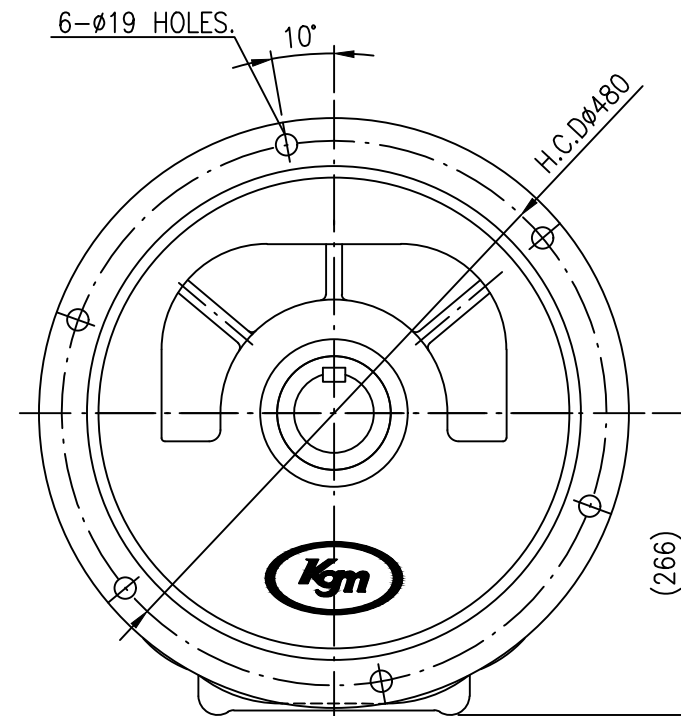


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KV270-15HP 4P

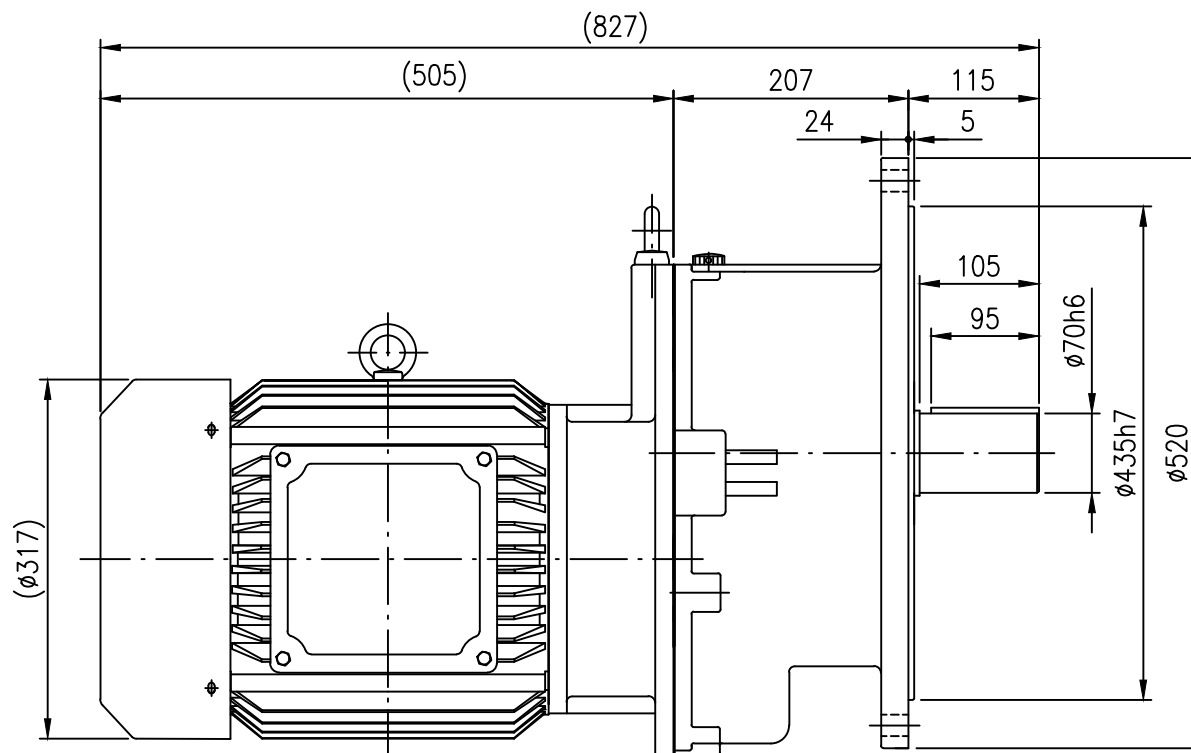

OUTPUT SHAFT

KV270	CAPACITY (Kw)	11Kw 4P	WEIGHT (Kg)
	REDUCTION RATIO	1/30	
	OUTPUT R.P.M	60	

TOOTH CHAMFERING		MODULE						표기외 일반 공차		표기외 일반 공차
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1	
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ±0.15	표기외 일반 공차
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ±0.2	
HC & HQ. I	C1	0.5	1.0	2.0				마무리: ▽	315 - 1000 : ±0.3	표기외 일반 공차
	C2	2.0	3.0	5.0				M=8(R0.1-1M)	M=6-15(R0.3M)	

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

	OUT LINE DWG						
No.	DESCRIPTION		SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.		GEARED MOTOR		CUSTOMER			
		KV270 15HP 4P I=1/30					
		OUT LINE DWG					
				STANDARD TYPE			
DRAWN	KSS	SCALE	N / S	UNIT	mm		
DESIGN	YHH	DATE	2019.09.04	PROJECTION			
CHECKED		REF. No.					
APPROVED		DRAWING No.	KGM-KV270-VT-15-30-0D	REV. No.			
 (주) 케이 지 엠 KOREA GEARED MOTOR							