

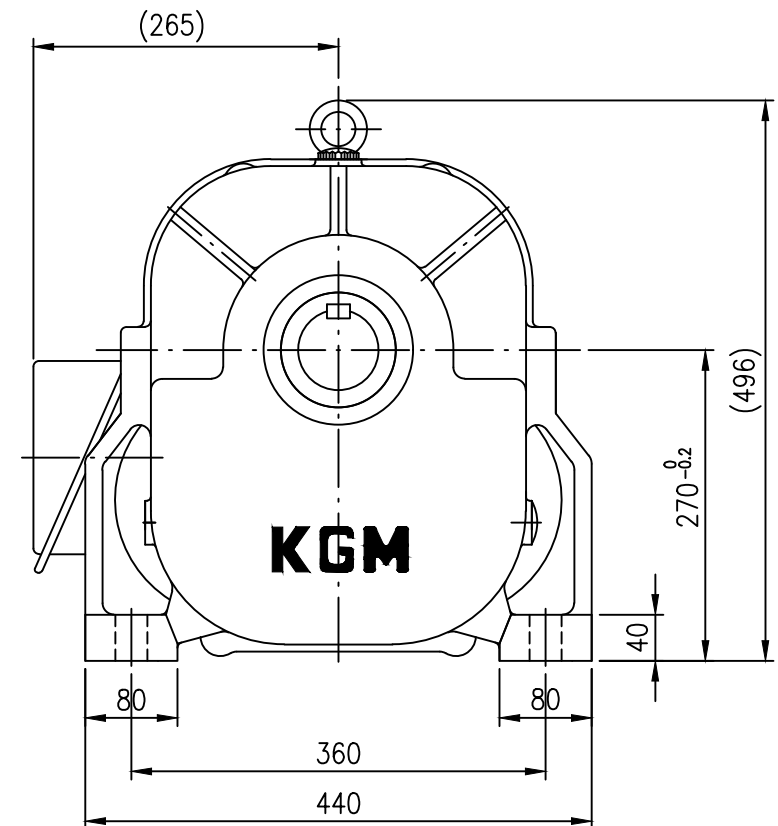


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KF270-20HP 4P

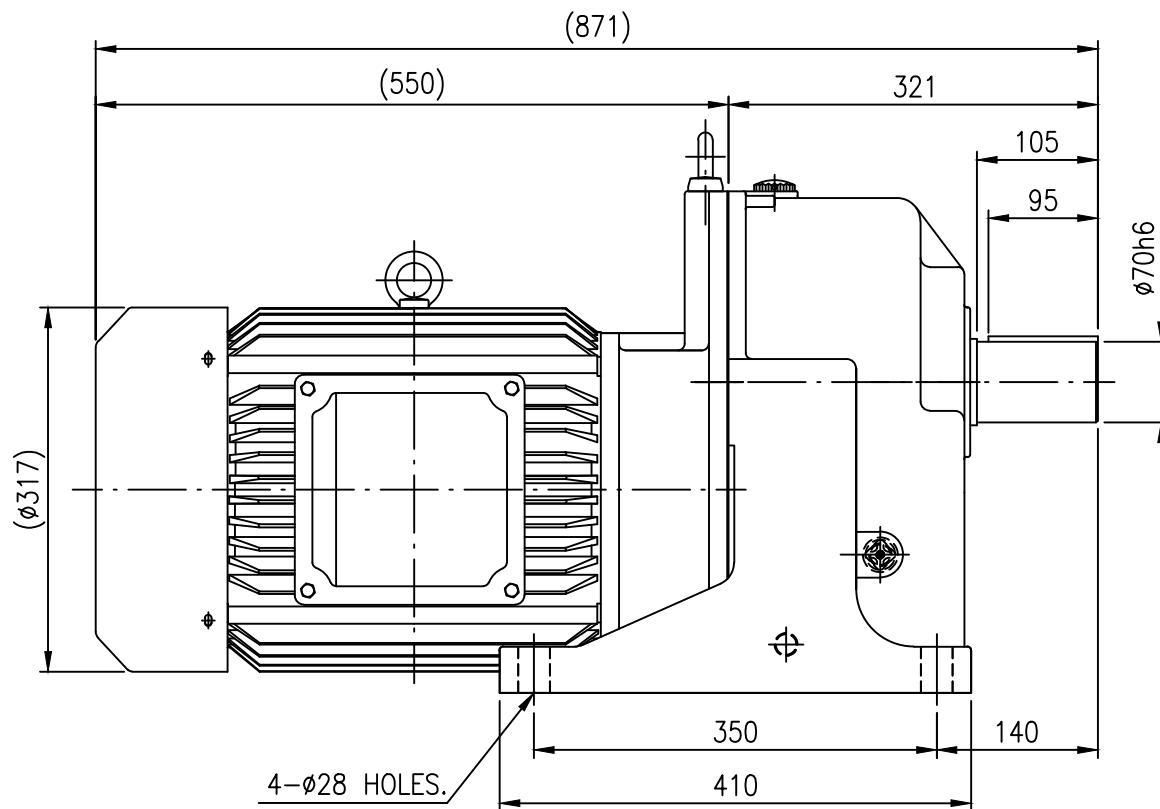

OUTPUT SHAFT

KF270	CAPACITY (Kw)	15Kw 4P	WEIGHT (Kg)
	REDUCTION RATIO	1/30	
	OUTPUT R.P.M	60	

TOOTH CHAMFERING	MODULE			TOOTH CHAMFERING	TOOTH CHAMFERING	TOOTH CHAMFERING	표기외 일반 공차
	5	5-15	15				
HQ. T	C1	0.2	0.5	1.0	1.0mm	1.0mm	각도 : ±0.2° 6 - 30 : ±0.1 30 - 120 : ±0.15 120 - 315 : ±0.2 315 - 1000 : ±0.3 1000 이상 : ±0.5
	C2	1.0	1.5	2.0			
HC & HQ. I	C1	0.5	1.0	2.0	1.0mm	1.0mm	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이는 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
	C2	2.0	3.0	5.0			

	OUT LINE DWG						
No.	DESCRIPTION		SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	GEARED MOTOR KF270 20HP 4P I=1/30			CUSTOMER			
	OUT LINE DWG			STANDARD TYPE			
DRAWN	KSS	SCALE	N / S	UNIT	mm		
DESIGN	YHH	DATE	2019.09.05	PROJECTION			
CHECKED	REF. No.		REV. No.				
APPROVED	DRAWING No.		KGM-KF270-HT-20-30-0D				
 (주) 케이지엠 KOREA GEARED MOTOR							



(주) 케이 지 엠
KOREA GEARED MOTOR

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3