
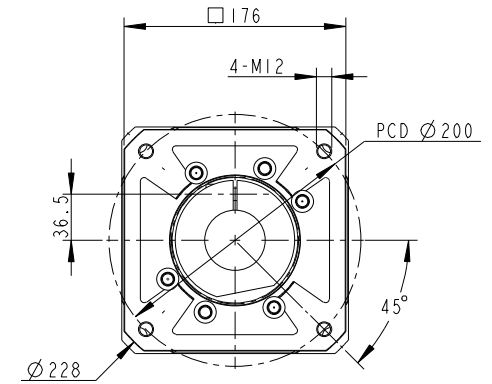
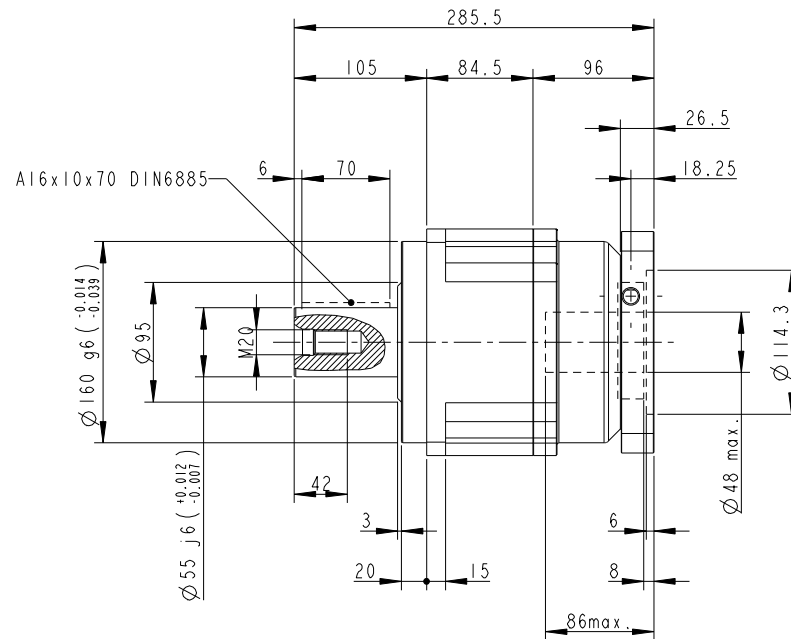


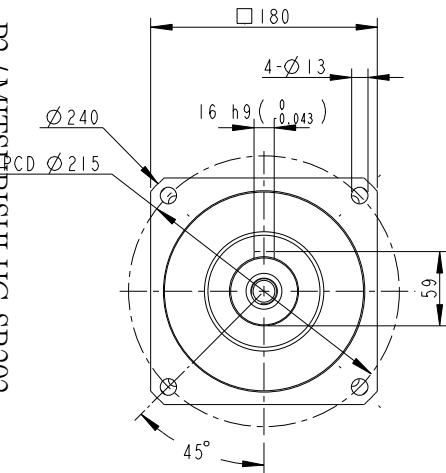

INERTIA: 22.48~28.98kg-cm<sup>2</sup>  
MASS: 29kg

SHAFT OPTION S1: SMOOTH OUTPUT SHAFT(STANDARD)  
SHAFT OPTION S2: OUTPUT SHAFT WITH KEYWAY  
MICRO BACKLASH<= 1 arcmin  
REDUCED BACKLASH<= 3 arcmin  
STANDARD BACKLASH<= 5 arcmin

BUSHING SUPPLIED WHEN MOTOR SHAFT DIAMETER SMALL THAN Ø48

Old Part No.AB180I-P416090I

|                                                           |      |                                                                                                                  |             |              |
|-----------------------------------------------------------|------|------------------------------------------------------------------------------------------------------------------|-------------|--------------|
| PART NO.<br>AB180I-P040360040I<br>AB180-I, AD-P200-M176-I |      |  <b>APEX DYNAMICS, INC.</b> |             |              |
| APPROVALS                                                 | DATE | TITLE<br>AB180 I STAGE, RATIO= 3~10<br>AND MOTOR FLANGE MOUNTING                                                 |             |              |
| DRAWN<br>江淑惠                                              |      |                                                                                                                  |             |              |
| CHECKED                                                   |      | DWG NO.<br>AB180I-P040360040I                                                                                    |             |              |
| APPROVED                                                  |      |                             | SIZE<br>2A0 | SCALE<br>1:1 |
|                                                           |      |                                                                                                                  | REV<br>2.0  |              |