
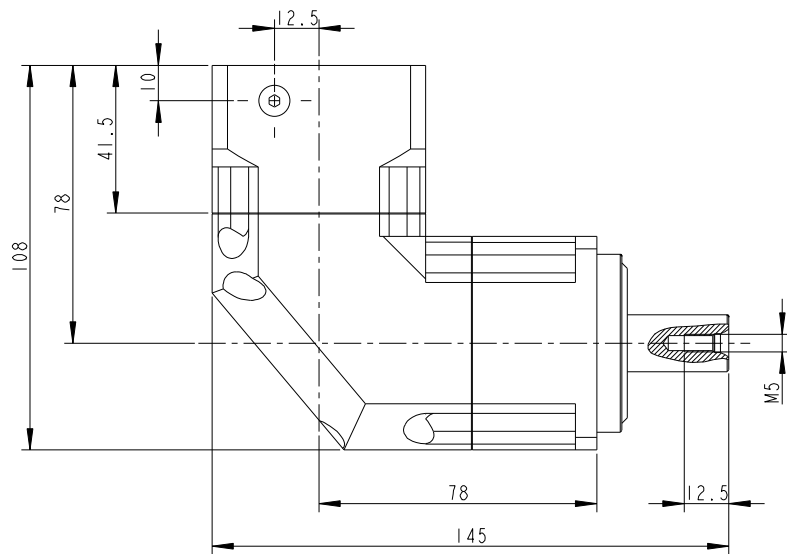
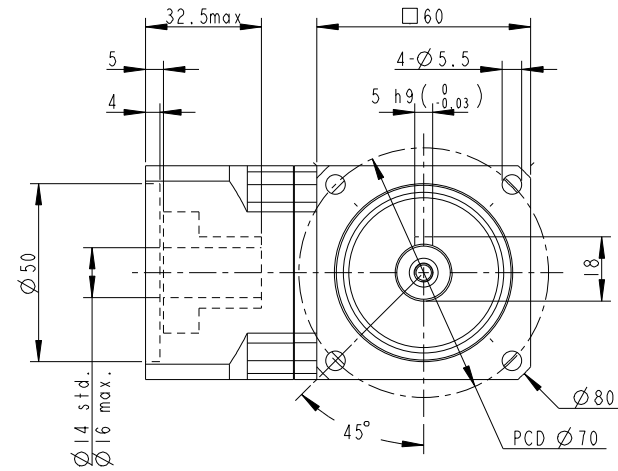


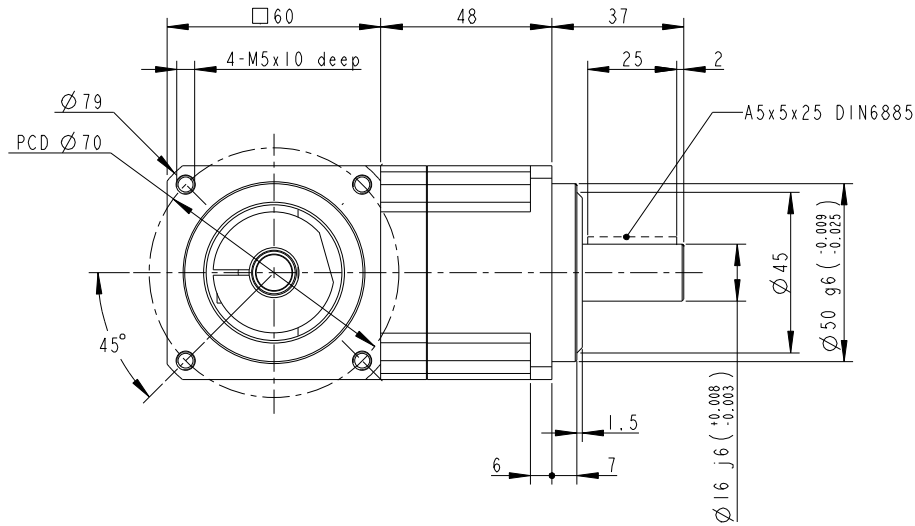


INERTIA: 0.07~0.35 kg-cm<sup>2</sup>  
MASS: 2.1 Kg

SHAFT OPTION S1: SMOOTH OUTPUT SHAFT(STANDARD)  
SHAFT OPTION S2: OUTPUT SHAFT WITH KEYWAY  
REDUCED BACKLASH<= 4arcmin  
STANDARD BACKLASH<= 6arcmin

\*\*\*BUSHING SUPPLIED WHEN MOTOR SHAFT DIAMETER SMALL THAN Ø14

Old Part No. ABR060I-P4020102

|                                                           |      |                                                                                                                  |            |              |
|-----------------------------------------------------------|------|------------------------------------------------------------------------------------------------------------------|------------|--------------|
| PART NO.<br>ABR060I-P0401200402<br>ABR060-I, AD-W60-M60-2 |      |  <b>APEX DYNAMICS, INC.</b> |            |              |
| APPROVALS                                                 | DATE | TITLE<br>ABR060 1 STAGE, RATIO= 3~20<br>AND STANDARD FLANGE MOUNTING                                             |            |              |
| DRAWN<br>江淑惠                                              |      | DWG NO.<br>ABR060I-P0401200402                                                                                   |            |              |
| CHECKED                                                   |      |                                                                                                                  |            |              |
| APPROVED                                                  |      |                             | SIZE<br>A2 | SCALE<br>1:1 |
|                                                           |      |                                                                                                                  |            | REV<br>2.0   |