
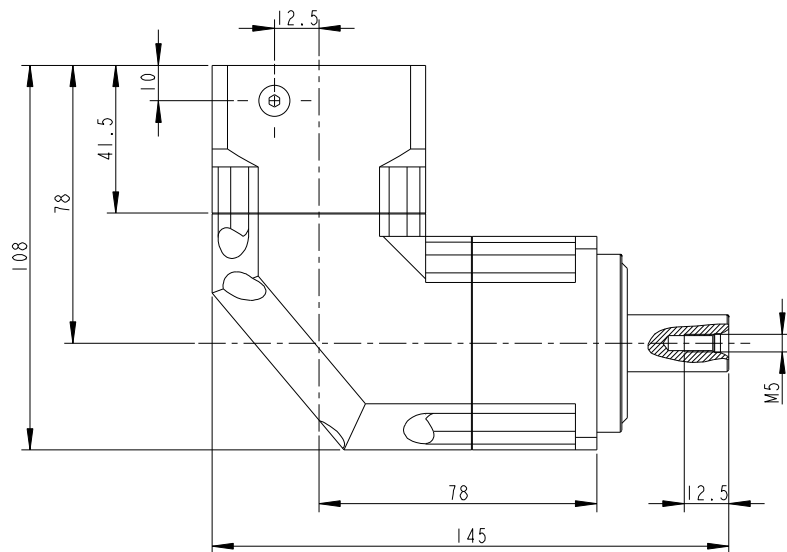
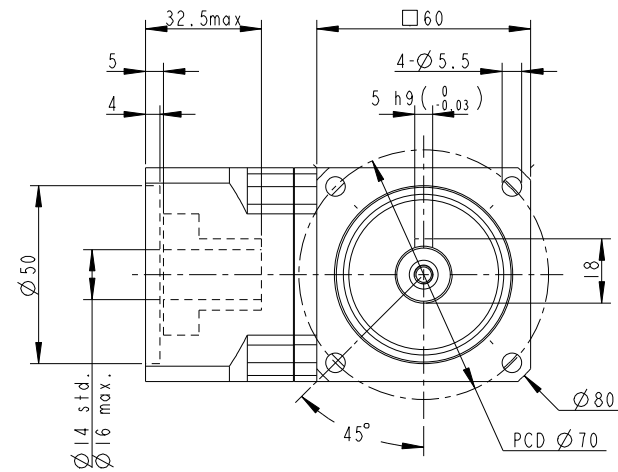


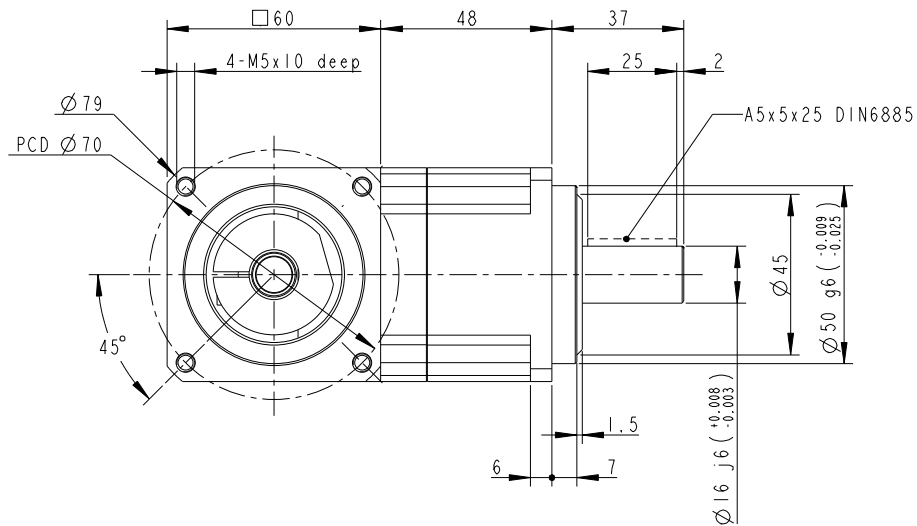


INERTIA: 0.07~0.35 kg-cm²
MASS: 2.1 Kg

SHAFT OPTION S1: SMOOTH OUTPUT SHAFT(STANDARD)
SHAFT OPTION S2: OUTPUT SHAFT WITH KEYWAY
REDUCED BACKLASH<= 4arcmin
STANDARD BACKLASH<= 6arcmin

***BUSHING SUPPLIED WHEN MOTOR SHAFT DIAMETER SMALL THAN Ø14

Old Part No. ABR060I-P4020102

PART NO. ABR060I-P0401200402 ABR060-I, AD-W60-M60-2		 APEX DYNAMICS, INC.		
APPROVALS	DATE	TITLE ABR060 1 STAGE, RATIO= 3~20 AND STANDARD FLANGE MOUNTING		
DRAWN 江淑惠		DWG NO. ABR060I-P0401200402		
CHECKED				
APPROVED			SIZE A2	SCALE 1:1
		REV 2.0		