

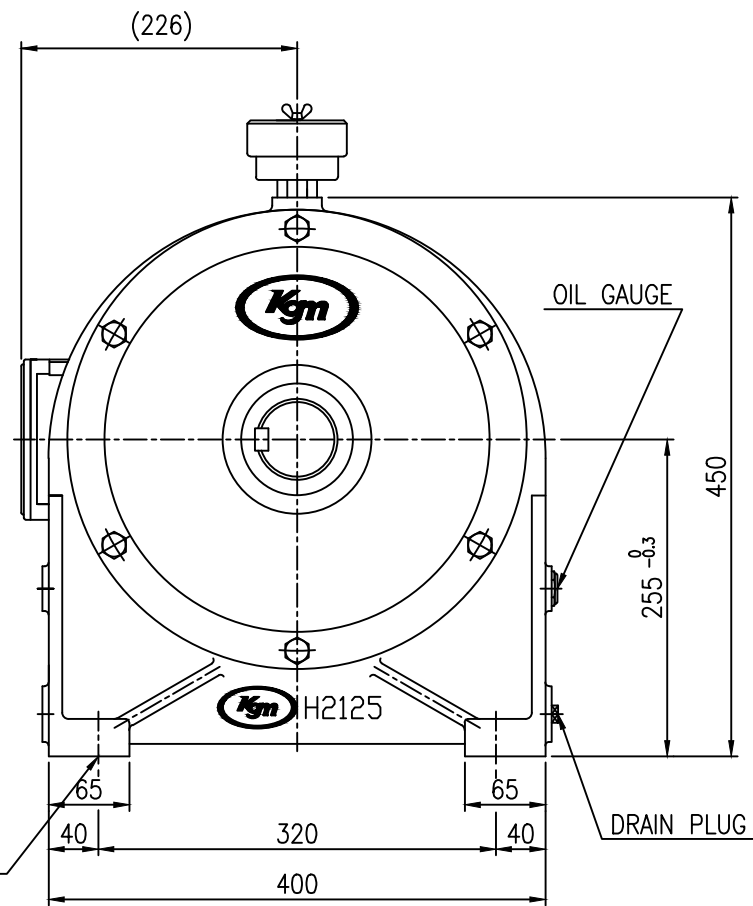


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

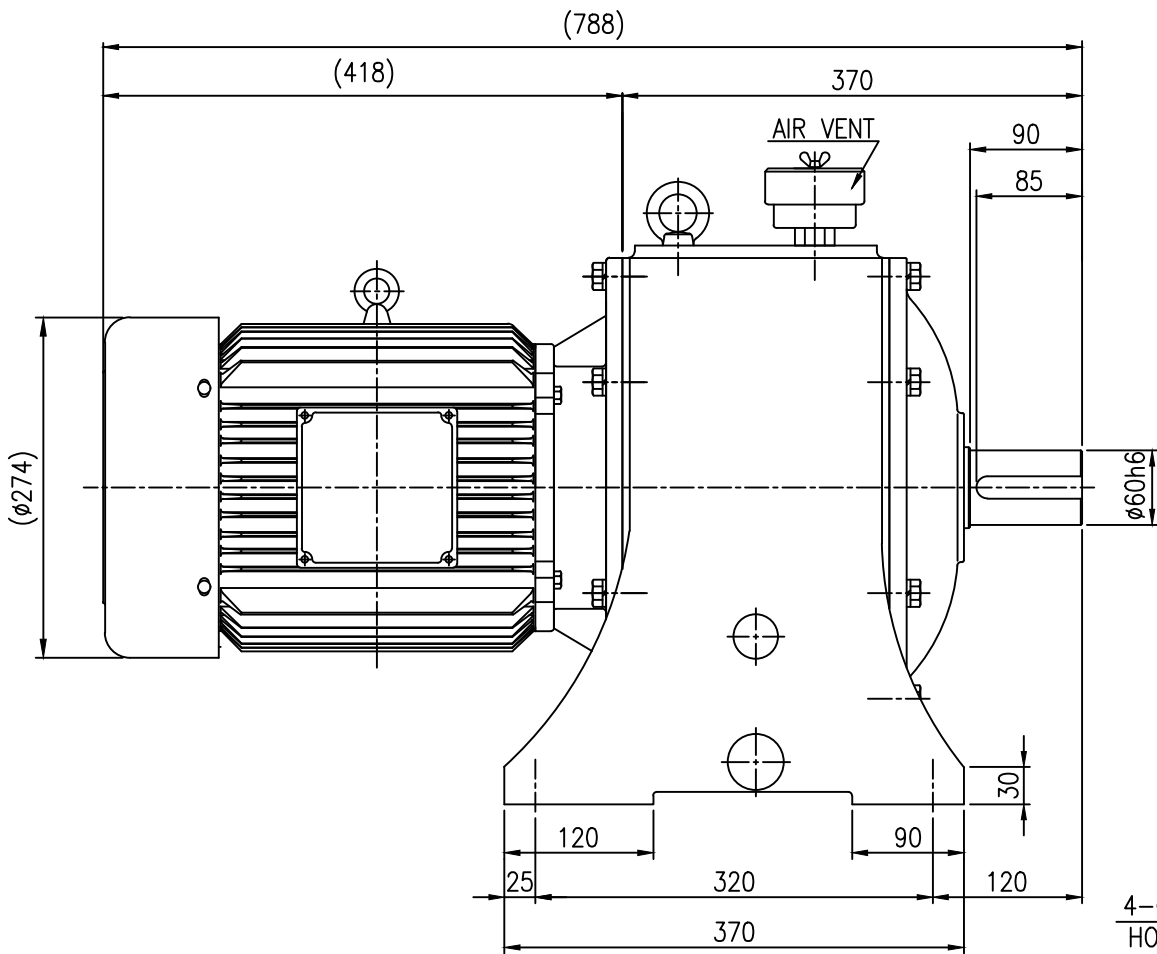

OUTPUT SHAFT

M5#0.8
M6# 1
M8#1.25
M10#1.5
M12#1.75
M16# 2
M18#2.5
M20#2.5
M22#2.5
M24#3

KD H2552	CAPACITY(Kw)	5.5kw4P		3.7kw6P	
	REDUCTION RATIO	1/25	1/30	1/25	1/30
	OUTPUT R.P.M	72	60	48	40
	WEIGHT (Kg)	215			

TOOTH CHAMFERING		M O D U L E					
		5	5-15	15			
HQ. T	C1	0.2	0.5	1.0			
	C2	1.0	1.5	2.0			
HC & HQ. I	C1	0.5	1.0	2.0			
	C2	2.0	3.0	5.0			
					M<8(R0.1-1M)	M=8-15(1.0M)	M>15(1.5-2.0M)

표기외 일반 공차		본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산의 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 본서에 의한 승인 없이 본 도면의 일부 또는 일부를 복사 또는 복제하거나, 타인에게 누설할 수 없습니다.
각도 : ±0.2°	6 - 30 : ±0.1	
CHAMFER: C1.0	30 - 120 : ±0.15	
FILLET: R1.0	120 - 315 : ±0.2	
마무리: ▽	315 - 1000 : ±0.3	
	1000 이상 : ±0.5	

() 내의 치수는 다소 변경될 수 있음.

OUT LINE DWG		SPECIFICATION	MAT'L	Q'TY	W/T	REMARK				
No.	DESCRIPTION									
TITLE SPEC.							CUSTOMER KD H2552			
KDH GEARED MOTOR 5.5KW 4P IE3 I=1/25~1/30							STANDARD TYPE			
OUTLINE DIMENSION										
DRAWN	KSS						SCALE	1 / 1	UNIT	mm
DESIGN	YHH						DATE	2019.12.24	PROJECTION	① ②
CHECKED							REF. No.	KD H2552	REV. No.	△
APPROVED		DRAWING No.	KDH2552-7.5-25-30-0D							
		(주) 케이 지 엠								
		KOREA GEARED MOTOR								