

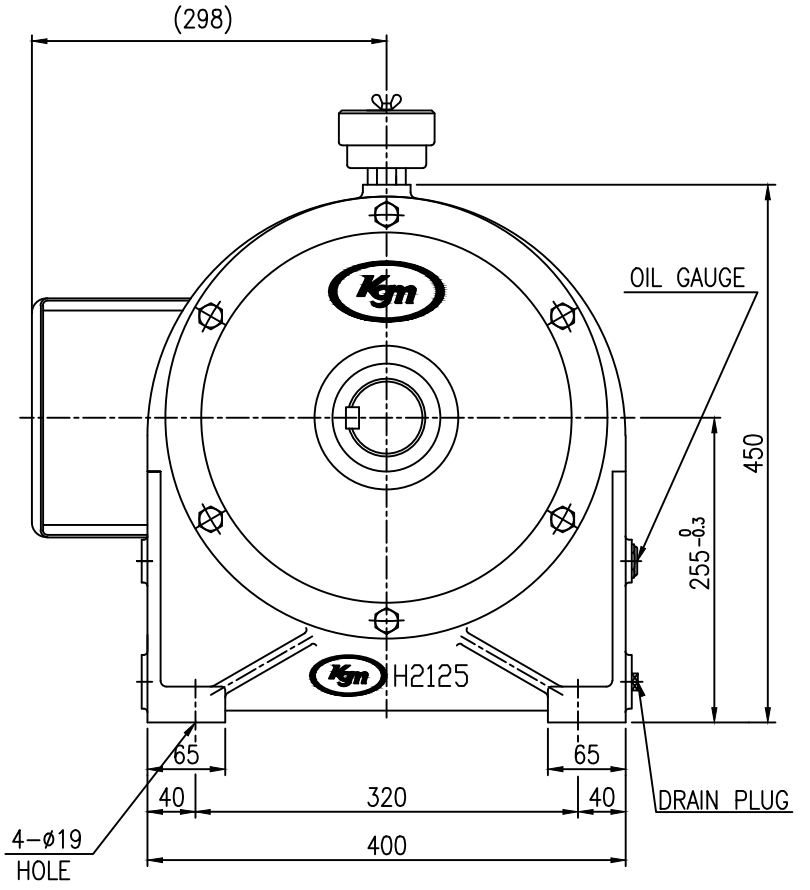


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

A
B
C
D
E
F

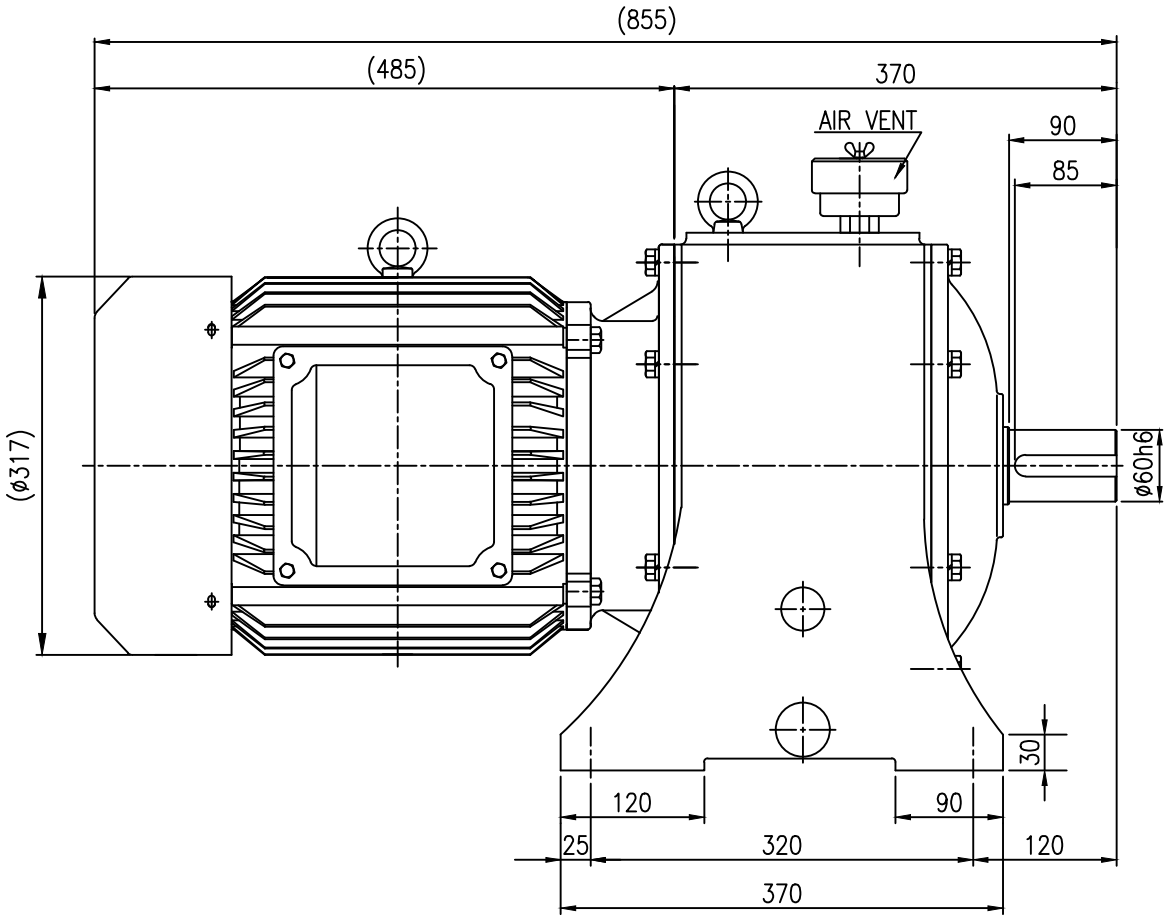

OUTPUT SHAFT

M5#0.8
M6# 1
M8#1.25
M10#1.5
M12#1.75
M16# 2
M18#2.5
M20#2.5
M22#2.5
M24#3

KD H2552	CAPACITY(Kw)	11kw4P			7.5kw6P		
	REDUCTION RATIO	1/10	1/15	1/20	1/10	1/15	1/20
	OUTPUT R.P.M	180	120	90	120	80	60
	WEIGHT (Kg)	235					

TOOTH CHAMFERING		M O D U L E						표기외 일반 공차	
		5	5-15	15				격도 : ±0.2°	6 ~ 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 ~ 120: ±0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 ~ 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0					
	C2	2.0	3.0	5.0	M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)		

()내의 치수는 다소 변경될 수 있음.

OUT LINE DWG						
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	KDH GEARED MOTOR 11KW 4P IE3 1=1/10~1/20		CUSTOMER KD H2552			
	OUTLINE DIMENSION		STANDARD TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT		MM
DESIGN	YHH	DATE	2020.11.25	PROJECTION		
CHECKED		REF. No.	KD H2552		REV No.	
APPROVED		DRAWING No.	KDH2552-15-10-20-0D			
		(주) 케이 지 엠				
KOREA GEARED MOTOR						