
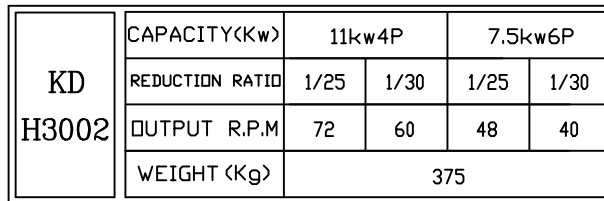


M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3



TOOTH CHAMFERING		M O D U L E					
		0.5	5-15	15			
HQ. T	C1	2.0	0.5	1.0			
	C2	1.0	1.5	2.0			
HC & HQ. I	C1	2.0	1.0	2.0			
	C2	2.0	3.0	5.0			

$M < B / (R0.1 - 1M)$

$M = B - 15 / (R0.3M)$

$M > 15 / (R0.3M)$

표기 및 일반 공차

각도 : $\pm 0.2^\circ$ 6 ~ 30°

CHAMFER: C1.0 30 ~ 120°

FILLET: R1.0 120 ~ 315°

마우리: 315 ~ 1000°

No.		OUT LINE DWG						
No.		DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.		KDH GEARED MOTOR 11KW 4P IE3 1=1/25~1/30 OUTLINE DIMENSION		CUSTOMER KDH H3002 STANDARD TYPE				
DRAWN		KSS	SCALE	1 / 1		UNIT	MM	
DESIGN		YHH	DATE	2020.11.25		PROJECTION		
CHECKED			REF. No.	KDH H3002			REV No. 	
APPROVED			DRAWING No.	KDH3002-15-25-30-0D				
		(주) 케이 지 엠 KOREA GEARED MOTOR						