

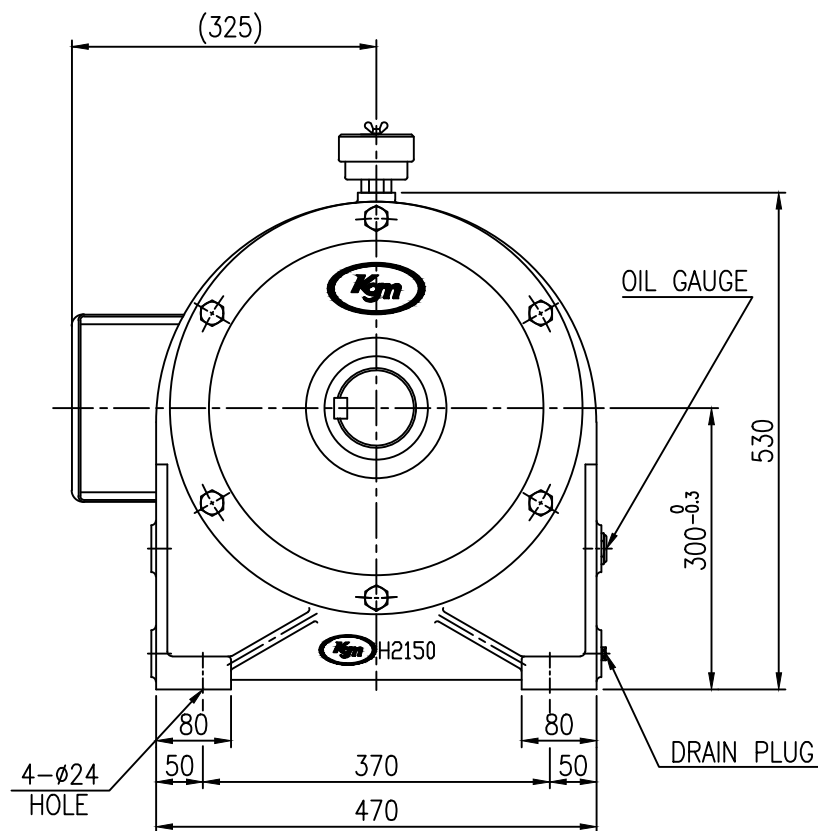


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

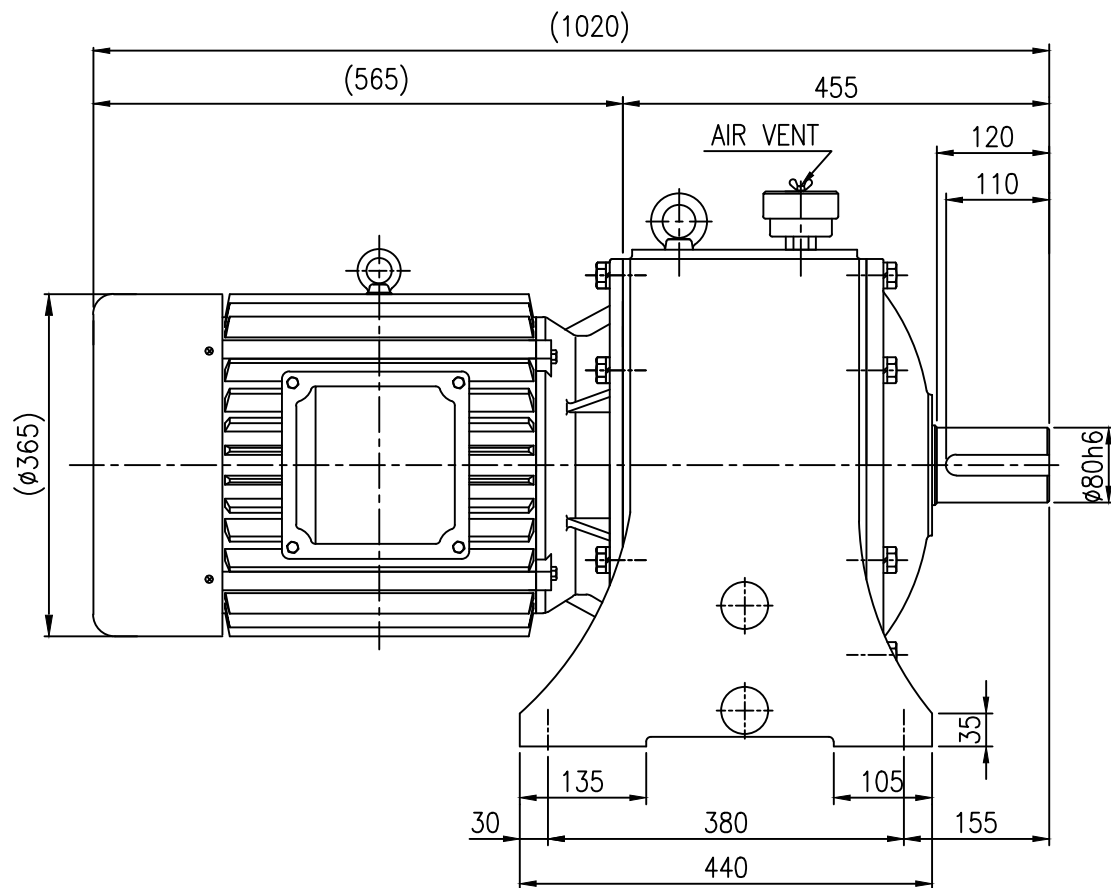

OUTPUT SHAFT

KD H3002	CAPACITY(Kw)	22kw4P			15kw6P		
	REDUCTION RATIO	1/10	1/15	1/20	1/10	1/15	1/20
	OUTPUT R.P.M	180	120	90	120	80	60
	WEIGHT (Kg)	485					

TOOTH CHAMFERING	MODULE						표기외 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산권 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 본서에 의한 승인 없이 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 무단에게 누설할 수 없습니다.
	5	5-15	15					
HQ. T	C1	0.2	0.5	1.0			각도 : ±0.2°	6 - 30 : ±0.1
	C2	1.0	1.5	2.0			CHAMFER: C1.0	30 - 120 : ±0.15
HC & HQ. I	C1	0.5	1.0	2.0			FILLET: R1.0	120 - 315 : ±0.2
	C2	2.0	3.0	5.0			마무리: ▽	315 - 1000 : ±0.3
				M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)	1000 이상 : ±0.5	

() 내의 치수는 다소 변경될 수 있음.

OUT LINE DWG						
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	KDH GEARED MOTOR 22KW 4P IE3 I=1/10~1/20		CUSTOMER KD H3002			
	OUTLINE DIMENSION		STANDARD TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT	mm	
DESIGN	YHH	DATE	2020.11.25	PROJECTION		
CHECKED		REF. No.	KD H3002	REV. No.	△	
APPROVED		DRAWING No.	KDH3002-30-10~20-0D			
 (주) 케이 지 엠 KOREA GEARED MOTOR						

M5#0.8
M6# 1
M8#1.25
M10#1.5
M12#1.75
M16# 2
M18#2.5
M20#2.5
M22#2.5
M24#3