

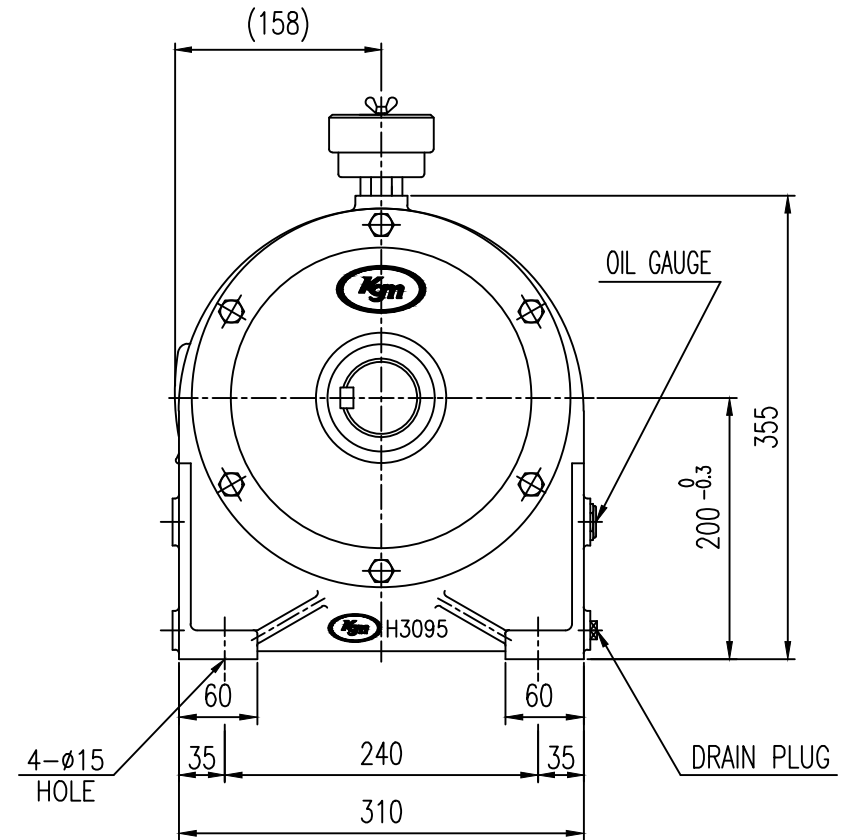


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

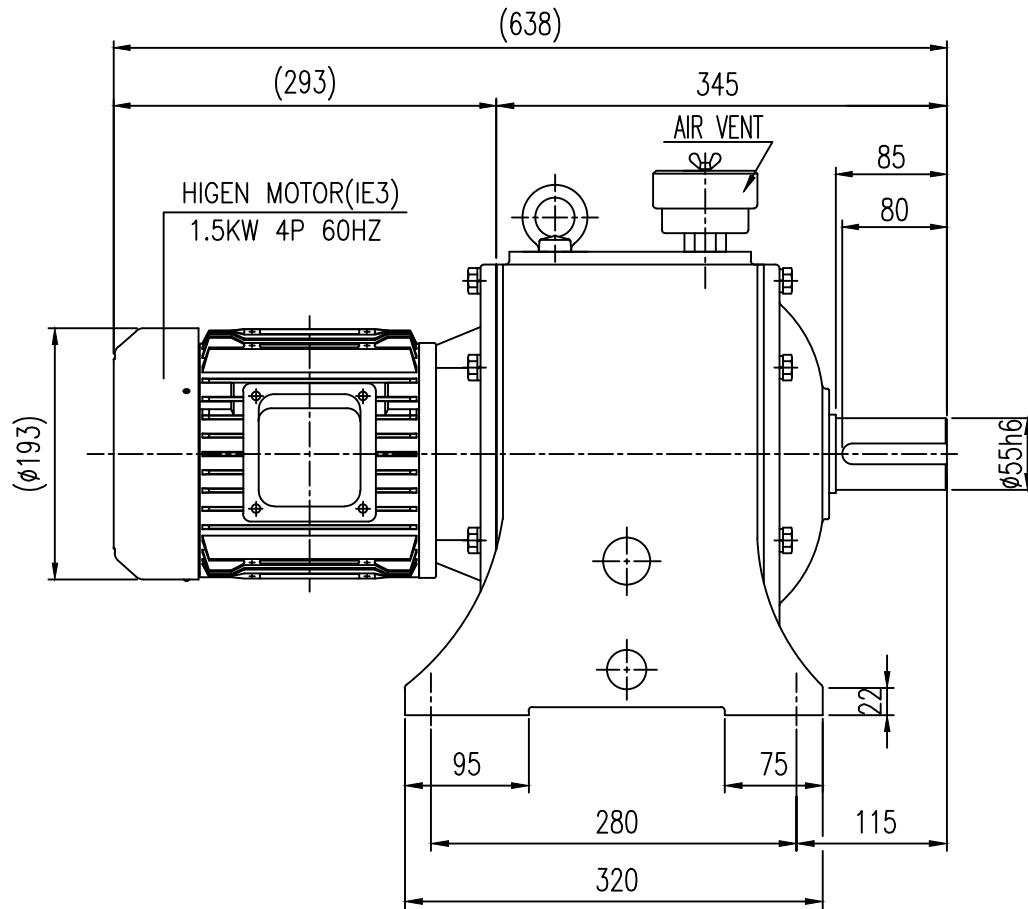

OUTPUT SHAFT

KD H2003	CAPACITY(Kw)	1.5kw4P			0.75kw6P		
	REDUCTION RATIO	1/90	1/100	1/120	1/90	1/100	1/120
	OUTPUT R.P.M	20	18	15	13.3	12	10
	WEIGHT (Kg)	130					

TOOTH CHAMFERING		M O D U L E						표기외 일반 공차		
		0.2	0.5	1~15	1.5				각도 : $\pm 0.2^\circ$	
HQ. T	C1	1.0	0.5	1.0	1.0				6 - 30 : ± 0.1	
	C2	1.0	1.5	2.0	2.0				CHAMFER: C1.0	30 - 120 : ± 0.15
HC & HQ. I	C1	0.5	1.0	2.0	2.0				FILLET: R1.0	120 - 315 : ± 0.2
	C2	2.0	3.0	5.0	5.0				마무리:	315 - 1000 : ± 0.3
		M<8(R0.1-1M)			M=8-15(R0.3M)		M>15(R0.3M)		1000 이상 : ± 0.5	

()내의 치수는 다소 변경될수 있음.

OUT LINE DWG		SPECIFICATION		MAT'L		Q'TY		W/T		REMARK	
No.	DESCRIPTION										
TITLE SPEC.		KDH GEARED MOTOR 1.5KW 4P IE3 1-1/90~1/120		CUSTOMER		KD H2003		STANDARD TYPE			
DRAWN		KSS		SCALE		1 / 1		UNIT		mm	
DESIGN		YHH		DATE		2020.12.28		PROJECTION		1	
CHECKED				REF. No.		KD H2003		REV. No.		△	
APPROVED				DRAWING No.		KDH2003-02-90~120-0D					



(주) 케이 지 엠
KOREA GEARED MOTOR

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3