

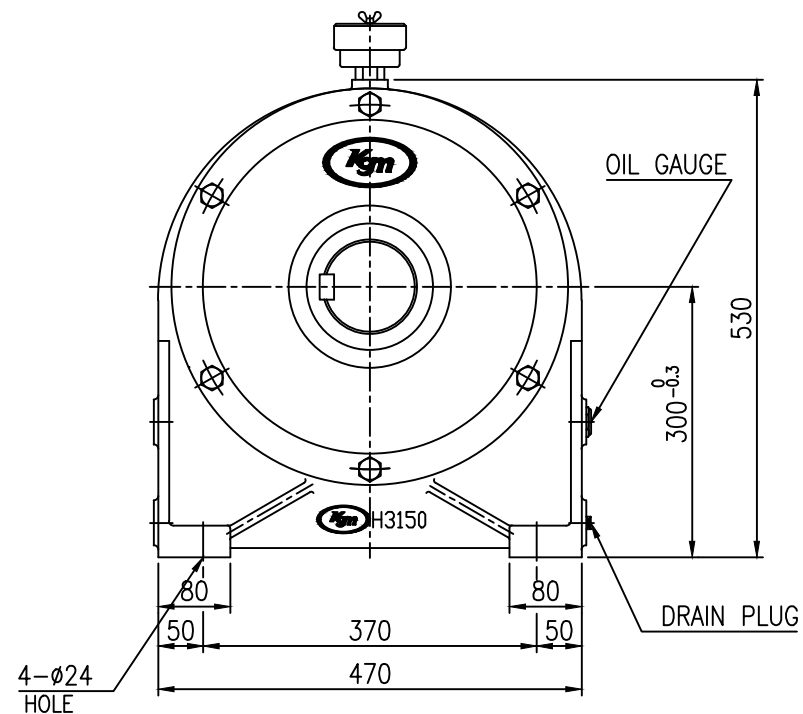


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

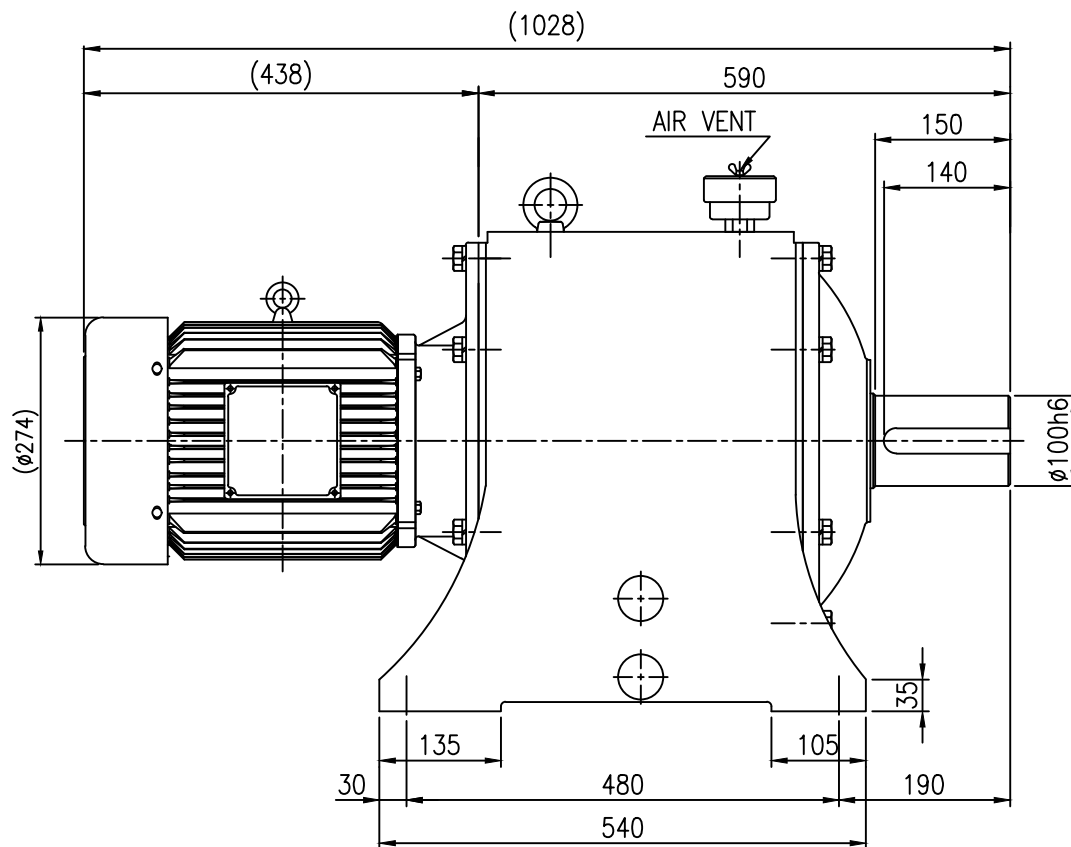

OUTPUT SHAFT

KD H3003	CAPACITY(Kw)	5.5kw4P			3.7kw6P		
	REDUCTION RATIO	1/90	1/100	1/120	1/90	1/100	1/120
	OUTPUT R.P.M	20	18	15	13.3	12	10
	WEIGHT (Kg)	450					

TOOTH CHAMFERING		M O D U L E						표기외 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0	 <td rowspan="5"><td rowspan="5"><th>CHAMFER: C1.0</th><th>30 - 120 : ±0.15</th></td></td>	 <td rowspan="5"><th>CHAMFER: C1.0</th><th>30 - 120 : ±0.15</th></td>	 <th>CHAMFER: C1.0</th> <th>30 - 120 : ±0.15</th>	CHAMFER: C1.0	30 - 120 : ±0.15
	C2	1.0	1.5	2.0 <th>FILLET: R1.0</th> <th>120 - 315 : ±0.2</th>				FILLET: R1.0	120 - 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0 <th rowspan="3">마무리: ▽</th> <th>315 - 1000 : ±0.3</th>				마무리: ▽	315 - 1000 : ±0.3
	C2	2.0	3.0	5.0 <th>1000 이상 : ±0.5</th>					1000 이상 : ±0.5
				M<8(R0.1-1M)					M=8-15(R0.3M)

() 내의 치수는 다소 변경될 수 있음.

	OUT LINE DWG						
No.	DESCRIPTION		SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	KDH GEARED MOTOR 5.5KW 4P IES I=1/90~1/120			CUSTOMER KD H3003			
	OUTLINE DIMENSION			STANDARD TYPE			
DRAWN	KSS	SCALE		1 / 1	UNIT	mm	
DESIGN	YHH	DATE		2020.11.27	PROJECTION		
CHECKED		REF. No.	KD H3003		REV. No.		
APPROVED		DRAWING No.		KDH3003-7.5-90~120-0D			
 (주) 케이 지 엠 KOREA GEARED MOTOR							

M5≒0.8
M6≒1
M8≒1.25
M10≒1.5
M12≒1.75
M16≒2
M18≒2.5
M20≒2.5
M22≒2.5
M24≒3