
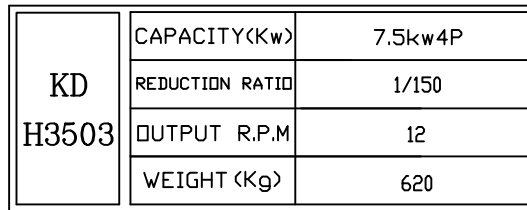


M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3



TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		0.5	1	1.5				각도 : $\pm 0.2^\circ$	6 ~ 30 : ± 0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 ~ 120 : ± 0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 ~ 315 : ± 0.1
HC & HQ. I	C1	0.5	1.0	2.0				마무리: 	315 ~ 1000 : ± 0.1
	C2	2.0	3.0	5.0				M < 8 (R0.1 ~ 1M)	M = 8 ~ 15 (R0.3M)

	OUT LINE DWG								
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KDH GEARED MOTOR			CUSTOMER					
	7.5KW 4P IES I=1/150			KD H3503					
	OUTLINE DIMENSION			STANDARD TYPE					
DRAWN	KSS	SCALE	1 / 1		UNIT	MM			
DESIGN	YHH	DATE	2020.11.27		PROJECTION				
CHECKED		REF. No.	KD H3503			REV No.			
ARRRIVED		DRAWING No.	KDH3503-10-150-OD						
 (주) 케이지엠 KOREA GEARED MOTOR									