
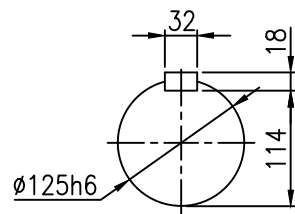
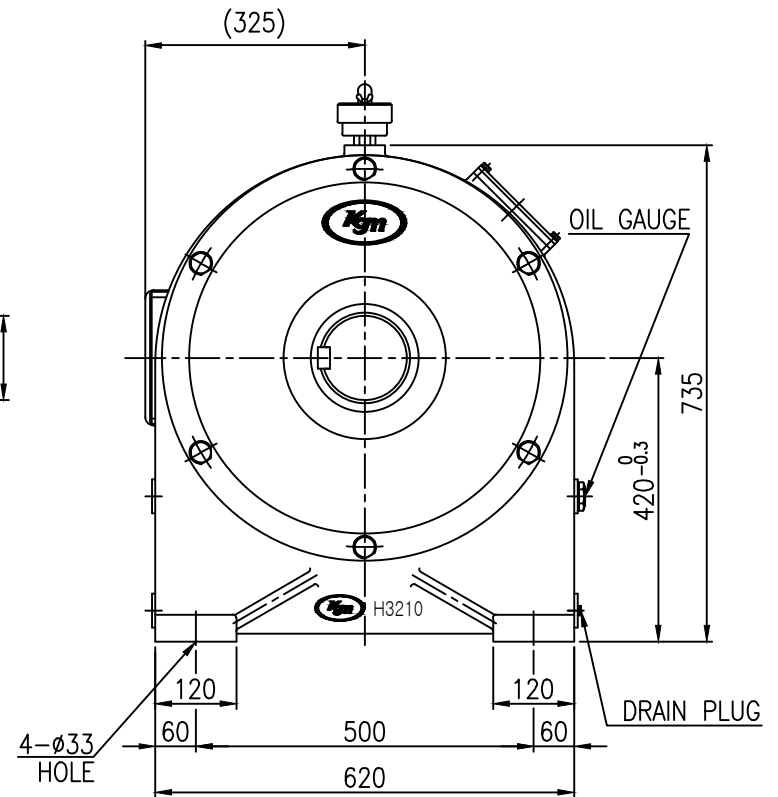


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

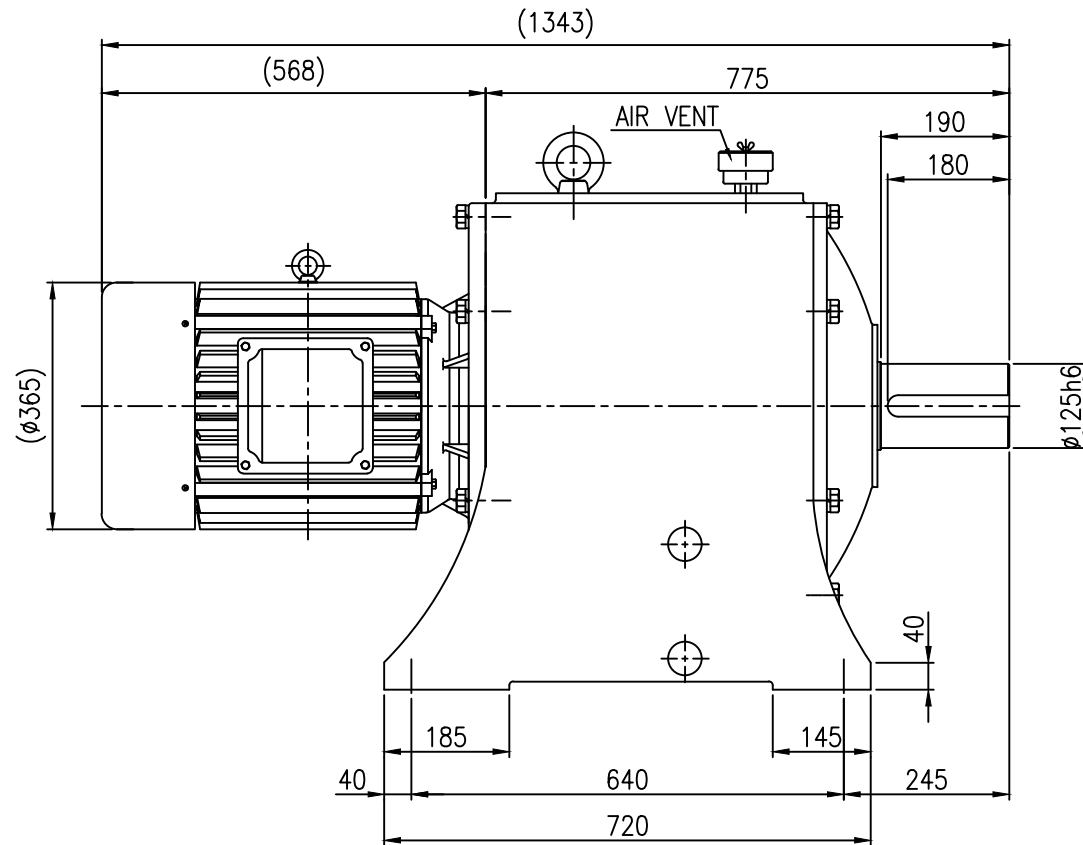

OUTPUT SHAFT

KD H4203	CAPACITY(Kw)	19kw4P			15kw6P		
	REDUCTION RATIO	1/70	1/80	1/90	1/70	1/80	1/90
	OUTPUT R.P.M	25.7	22.5	20	17.1	15	13.3
	WEIGHT (Kg)	930					

TOOTH CHAMFERING		M O D U L E						표기외 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ±0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0				마무리: ∇	315 - 1000 : ±0.2
	C2	2.0	3.0	5.0				M<8(R0.1-1M)	M=8-15(R0.3M)

()내의 치수는 다소 변경될수 있음.

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.		KDH GEARED MOTOR 19KW 4P IE3 I=1/70~1/90		CUSTOMER KD H4203 STANDARD TYPE			
DRAWN		KSS	SCALE		1 / 1	UNIT	mm
DESIGN		YHH	DATE		2020.11.30	PROJECTION	1st Angle
CHECKED			REF. No.		KD H4203		
APPROVED			DRAWING No.		KDH4203-25-70-90-0D		
					REV. No. △		



(주) 케이 지 엠
KOREA GEARED MOTOR

M5+0.8
M6+1
M8+1.25
M10+1.5
M12+1.75
M16+2
M18+2.5
M20+2.5
M22+2.5
M24+3