



NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

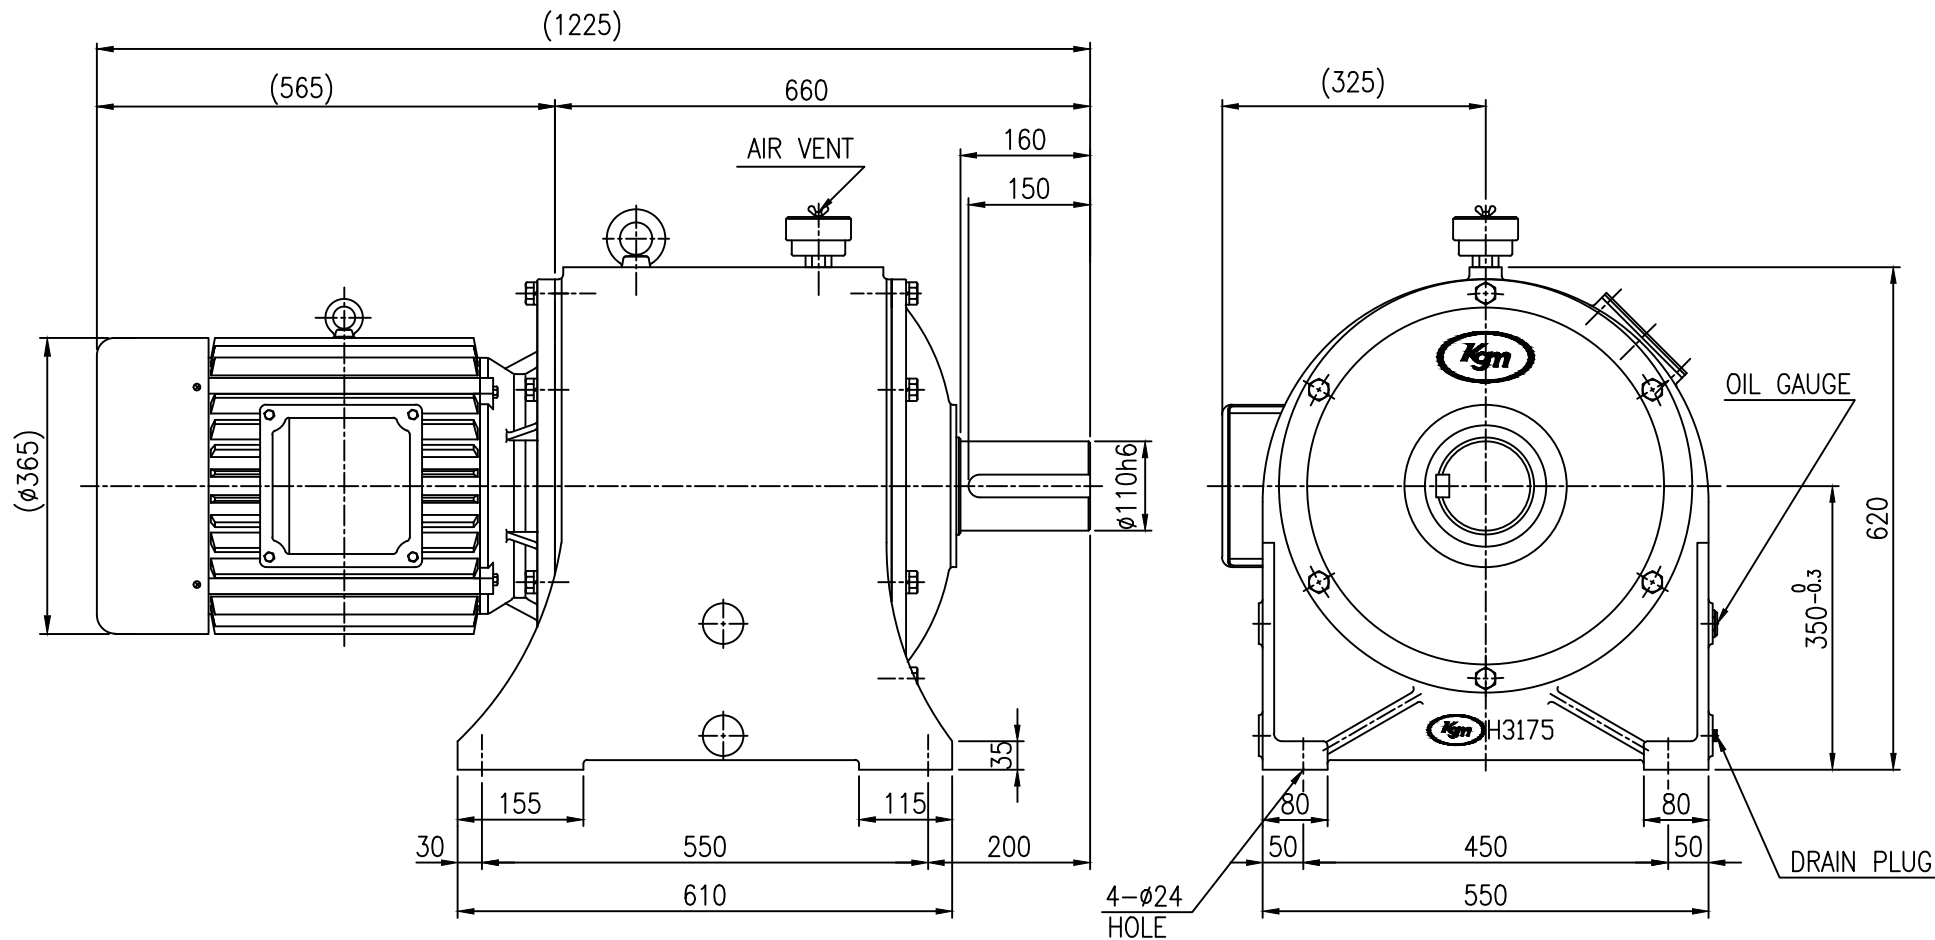

M5#0.8
M6# 1
M8#1.25
M10#1.5
M12#1.75
M16# 2
M18#2.5
M20#2.5
M22#2.5
M24#3

KD H3503	CAPACITY(Kw)	22kw4P			15kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	720					

TOOTH CHAMFERING		M O D U L E						표기외 일반	
		5	5-15					각도 : ±0.2°	
HQ. T	C1	0.2	0.5	1.0	 <td rowspan="2"><td rowspan="2"><th>CHAMFER: C1.0</th><th rowspan="2">Fillet: R1.0</th></td></td>	 <td rowspan="2"><th>CHAMFER: C1.0</th><th rowspan="2">Fillet: R1.0</th></td>	 <th>CHAMFER: C1.0</th> <th rowspan="2">Fillet: R1.0</th>	CHAMFER: C1.0	Fillet: R1.0
	C2	1.0	1.5	2.0 <th></th>					
HC & HQ. I	C1	0.5	1.0	2.0	 <td rowspan="2"><td rowspan="2"><th>마무리: </th><th></th></td></td>	 <td rowspan="2"><th>마무리: </th><th></th></td>	 <th>마무리: </th> <th></th>	마무리: 	
	C2	2.0	3.0	5.0				M<8(R0.1~1M)	M=8~15(R0.3M)