

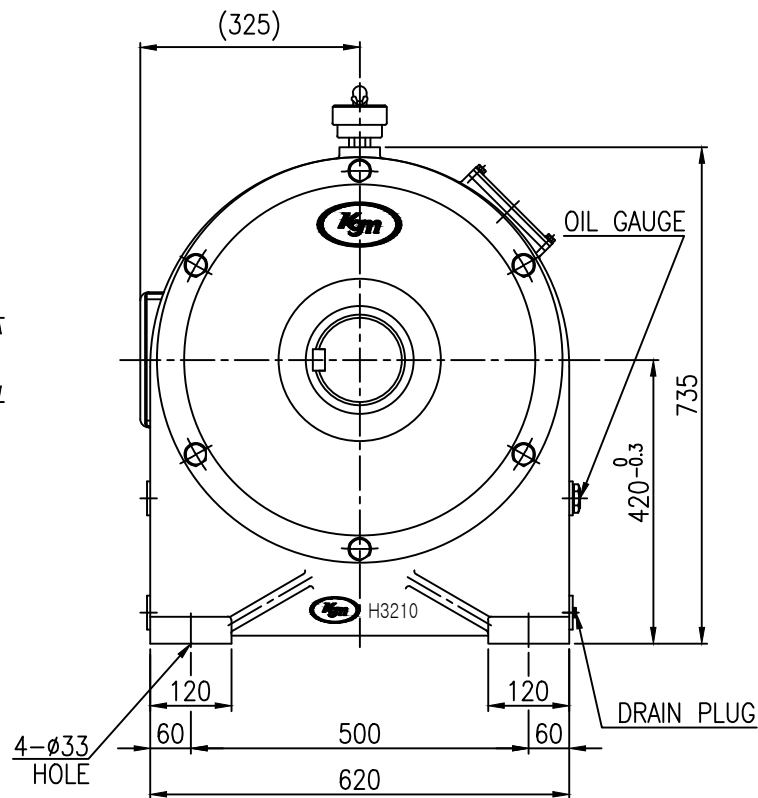


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

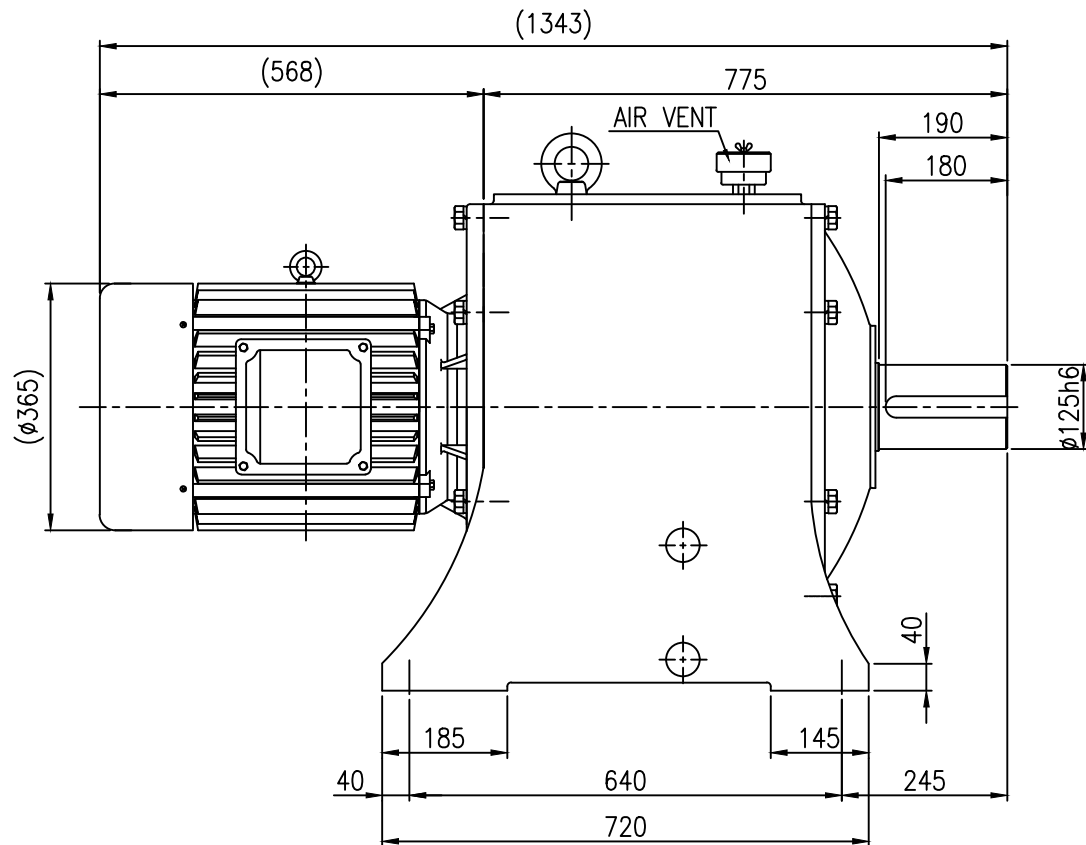

OUTPUT SHAFT

KD H4203	CAPACITY(Kw)	22kw4P		15kw6P	
	REDUCTION RATIO	1/100	1/120	1/100	1/120
	OUTPUT R.P.M	18	15	12	10
	WEIGHT (Kg)	945			

TOOTH CHAMFERING	MODULE			표기외 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산의 관련 법규에 의해 보호되며, (주)케이지엠으로 부터 본서에 의한 승인 없이 본 도면의 전부 또는 일부를 복사 또는 재제거나, 타인에게 누설할 수 없습니다.
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2° 6 ~ 30 : ±0.1 30 ~ 120 : ±0.15 120 ~ 315 : ±0.2 315 ~ 1000 : ±0.3 1000 이상 : ±0.5
	C2	1.0	1.5	2.0	
HC & HQ. I	C1	0.5	1.0	2.0	CHAMFER: C1.0 30 ~ 120 : ±0.15 120 ~ 315 : ±0.2 315 ~ 1000 : ±0.3 1000 이상 : ±0.5
	C2	2.0	3.0	5.0	
M<8(R0.1-1M) M=8-15(R0.3M) M>15(R0.3M)					

()내의 치수는 다소 변경될수 있음.

OUT LINE DWG									
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KDH GEARED MOTOR				CUSTOMER		KD H4203		
	22KW 4P IES 1=1/100~1/120				SPECIAL TYPE				
	OUTLINE DIMENSION								
DRAWN	KSS	SCALE			1 / 1	UNIT		mm	
DESIGN	YHH	DATE			2021.01.20	PROJECTION			
CHECKED		REF. No.			KD H4203		REV. No.		
APPROVED		DRAWING No.			KDH4203-30-100-120-0D				
 (주) 케이 지 엠 KOREA GEARED MOTOR									

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3