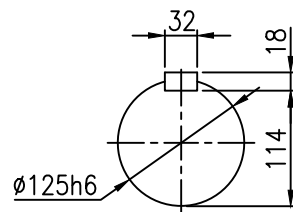
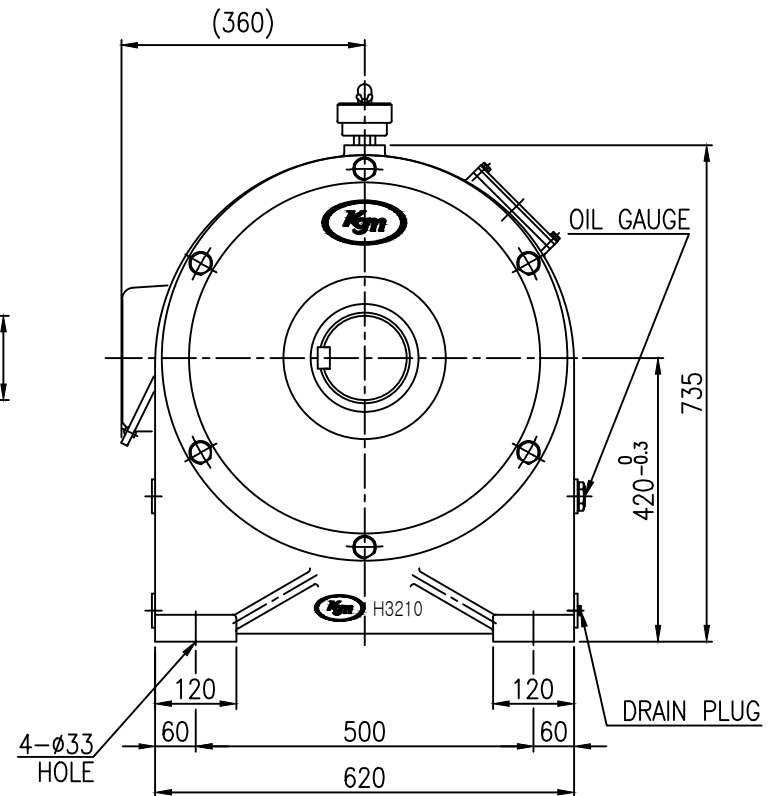


F

OUTPUT SHAFT

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

KD H4203	CAPACITY(Kw)	30kw4P			22kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	990					

TOOTH CHAMFERING		M O D U L E							표기와 일반 공차		
		5	5~1.5	1.5	각도 : ±0.2°				6~30		
HQ. T	C1	0.2	0.5	1.0				카드 : ±0.2°	6~30		
	C2	1.0	1.5	2.0				각도 : C1.0	30~120		
HC & HQ. I	C1	0.5	1.0	2.0				Fillet: R1.0	120~315	마무리: 	315~1000
	C2	2.0	3.0	5.0							

()내의 치수는 다소 변경될수 있음.

	OUT LINE DWG								
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KDH GEARED MOTOR				CUSTOMER KD H4203				
	30KW 4P IE3 I=1/40~1/80				STANDARD TYPE				
	OUTLINE DIMENSION								
DRAWN	KSS	SCALE	1 / 1		UNIT	mm			
DESIGN	YHH	DATE	2020.10.21		PROJECTION				
CHECKED		REF. No.	KD H4203		REV. No.				△
APPROVED		DRAWING No.	KDH4203-40-40-80-OD						
 (주) 케이 지 엠									
KOREA GEARED MOTOR									