

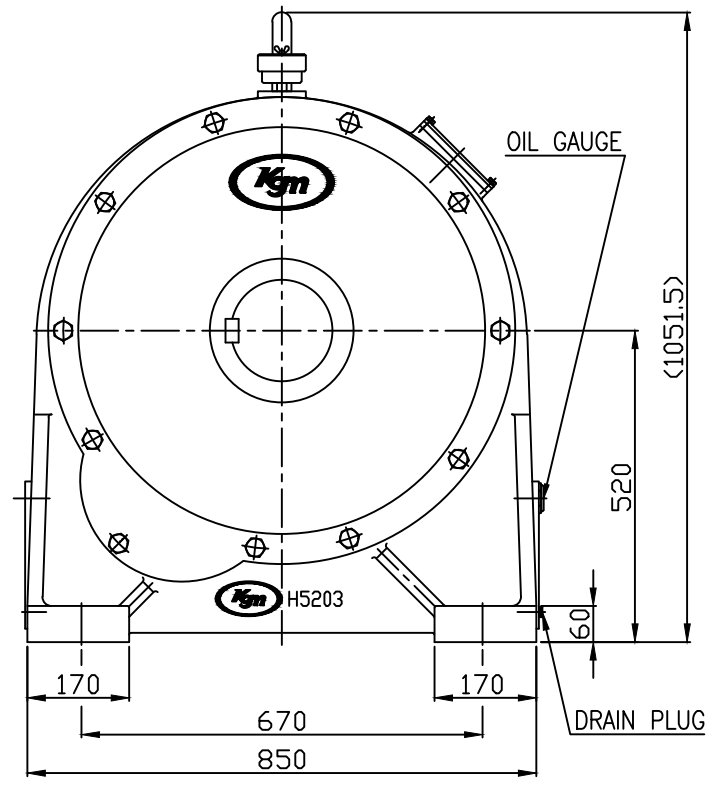


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

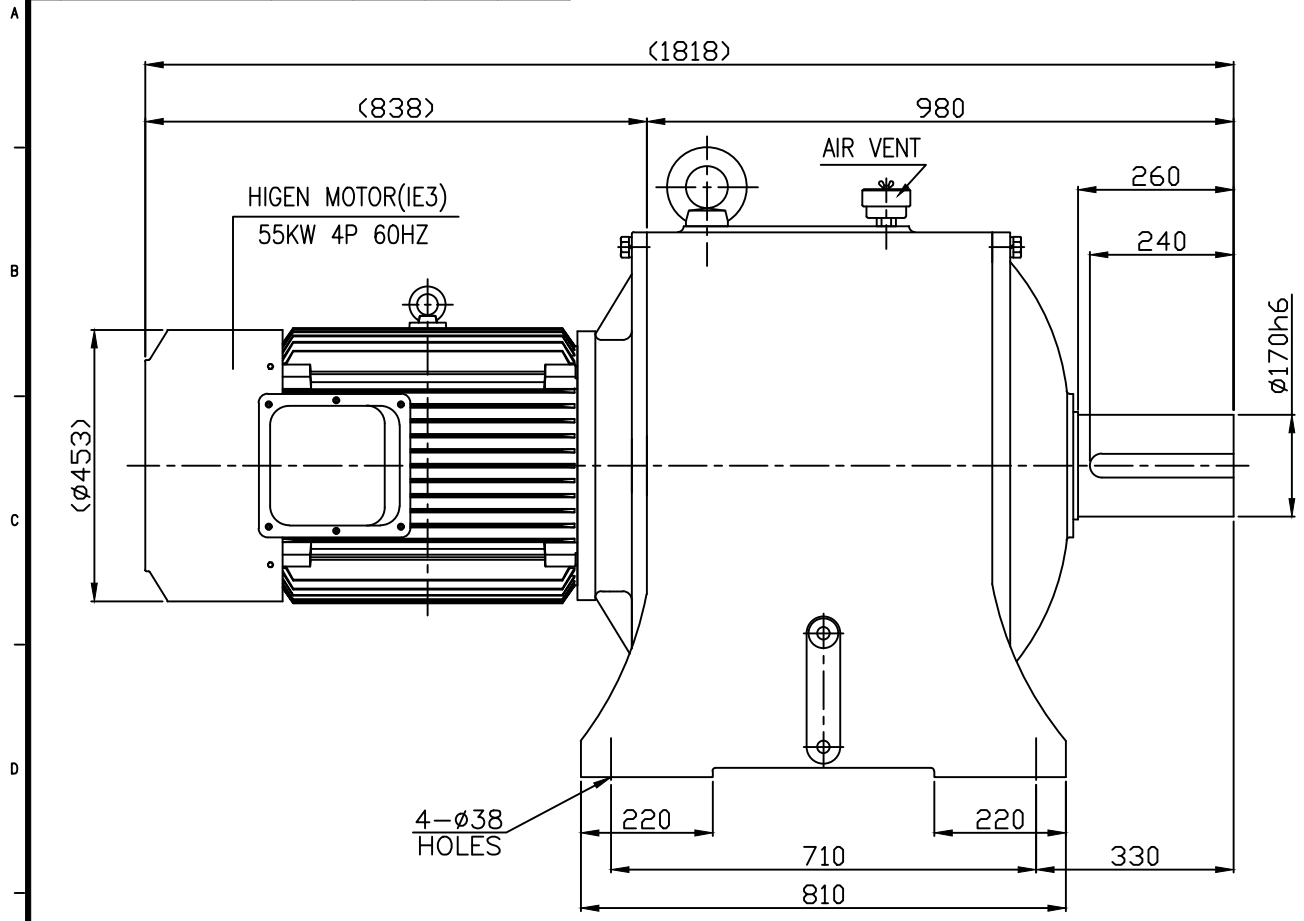

KD H5203	CAPACITY(Kw)	55kw4P			45kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	1330					

TOOTH CHAMFERING	MODULE			표기외 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산의 관련 법규에 의해 보호되며, (주)케이지엠으로 부터 본서에 의한 승인 없이 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2° 6 - 30 : ±0.1 30 - 120 : ±0.15 120 - 315 : ±0.2 315 - 1000 : ±0.3 1000 이상 : ±0.5
	C2	1.0	1.5	2.0	
HC & HQ. I	C1	0.5	1.0	2.0	1.85-2.35mm 15/16
	C2	2.0	3.0	5.0	
M<8(R0.1-1M) M=8-15(R0.3M) M>15(R0.3M)					

()내의 치수는 다소 변경될수 있음.

No.		DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	KDH GEARED MOTOR 55KW 4P IE3 I=1/40~1/60 OUTLINE DIMENSION			CUSTOMER KD H5203 STANDARD TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT	MM		
DESIGN	YHH	DATE	2020.11.30	PROJECTION			
CHECKED		REF. No.	KD H5203	REV. No.	△		
APPROVED		DRAWING No.	KDH5203-75-40-60-0D				
 (주) 케이 지 엠 KOREA GEARED MOTOR							

M5≧0.8
M6≧1
M8≧1.25
M10≧1.5
M12≧1.75
M16≧2
M18≧2.5
M20≧2.5
M22≧2.5
M24≧3