

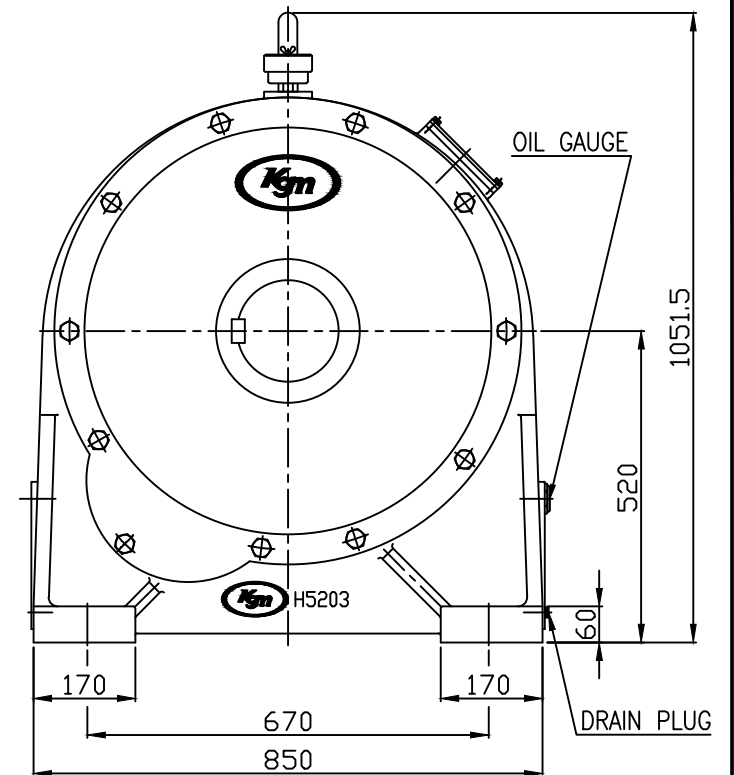


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

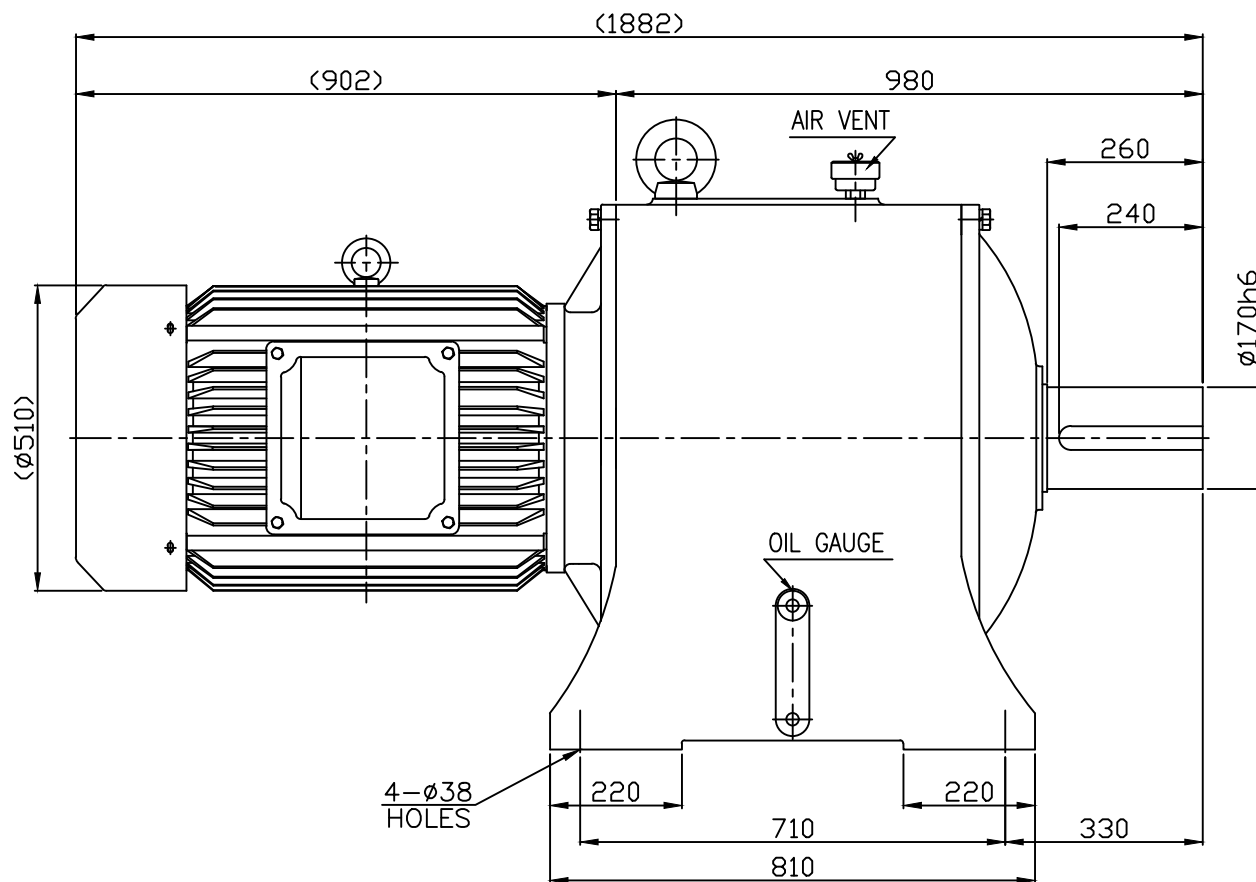

KD H5203	CAPACITY(Kw)	75kw4P				55kw6P			
	REDUCTION RATIO	1/30	1/40	1/50	1/60	1/30	1/40	1/50	1/60
	OUTPUT R.P.M	60	45	36	30	40	30	24	20
	WEIGHT (Kg)	1460							

TOOTH CHAMFERING		M O D U L E					표기외 일반 공차		본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산의 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 본서에 의한 승인 없이 본 도면의 전부 또는 일부를 복사 또는 복제하거나, 타인에게 누설할 수 없습니다.
		5	5-15	15					
HQ. T	C1	0.2	0.5	1.0			각도 : ±0.2° 6 ~ 30 : ±0.1 CHAMFER: C1.0 30 ~ 120 : ±0.15 FILLET: R1.0 120 ~ 315 : ±0.2 마무리: ▽ 315 ~ 1000 : ±0.3 1000 이상 : ±0.5		
	C2	1.0	1.5	2.0					
HC & HQ. I	C1	0.5	1.0	2.0					
	C2	2.0	3.0	5.0					
				M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)			

()내의 치수는 다소 변경될수 있음.

OUT LINE DWG						
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	KDH GEARED MOTOR 75KW 4P IE3 I=1/30~1/60		CUSTOMER KD H5203			
	OUTLINE DIMENSION		STANDARD TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT	mm	
DESIGN	YHH	DATE	2020.11.30	PROJECTION	☯ ↺	
CHECKED		REF. No.	KD H5203	REV. No.	△	
APPROVED		DRAWING No.	KDH5203-100-30-60-0D			
 (주) 케이 지 엠 KOREA GEARED MOTOR						

M5≒0.8
M6≒1
M8≒1.25
M10≒1.5
M12≒1.75
M16≒2
M18≒2.5
M20≒2.5
M22≒2.5
M24≒3