
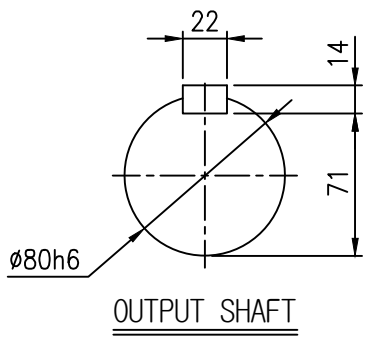


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

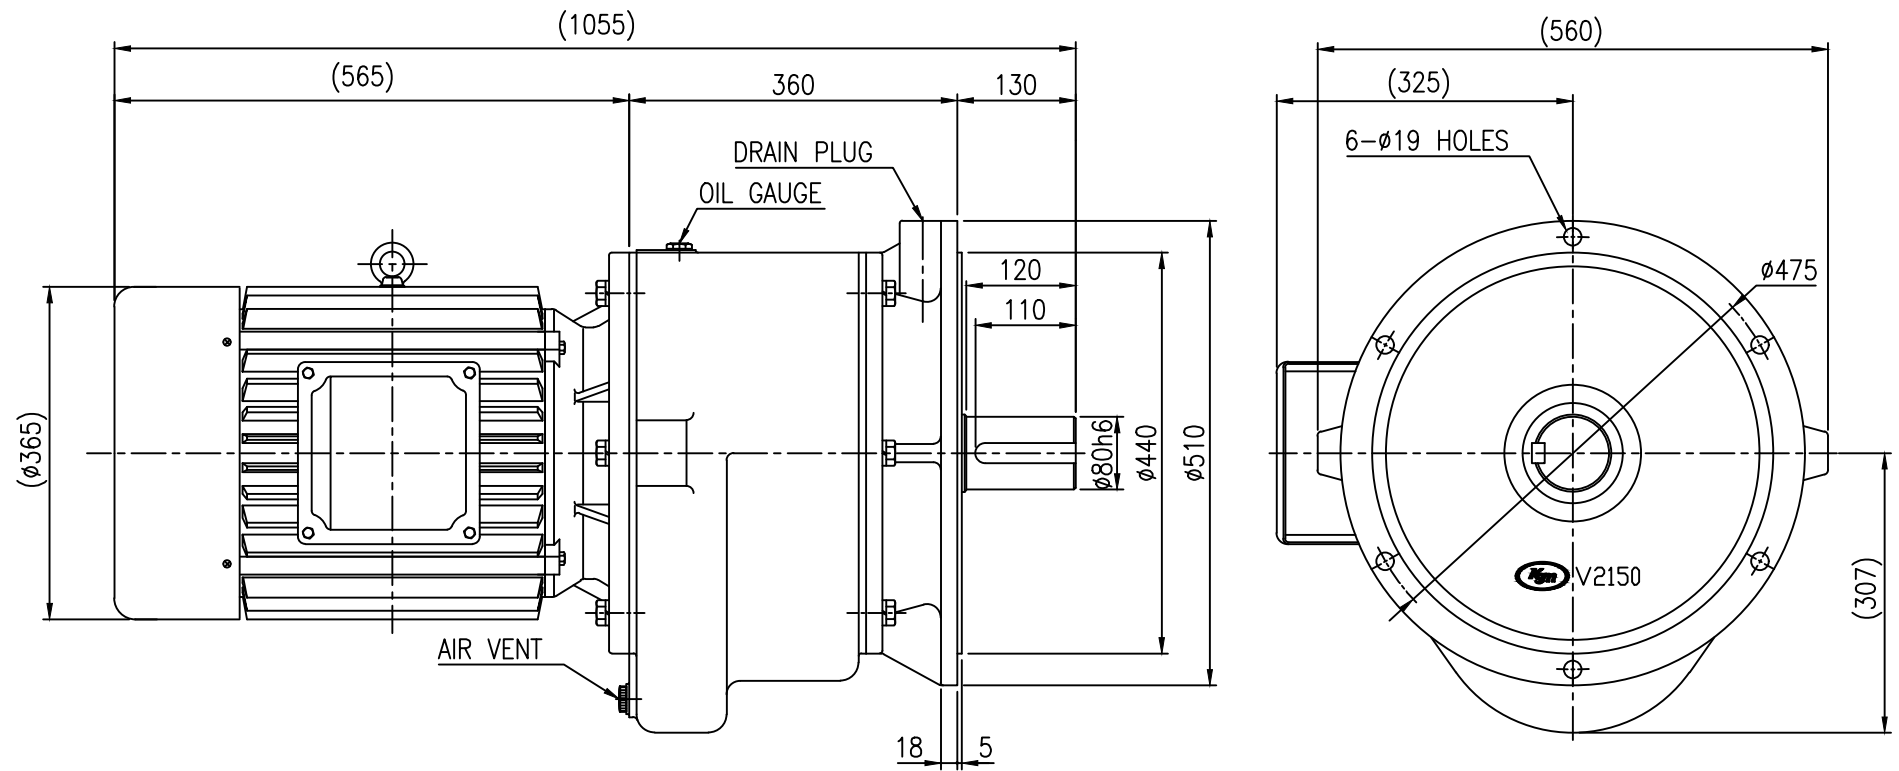

KD V3002	CAPACITY(Kw)	22kw4P			15kw6P		
	REDUCTION RATIO	1/10	1/15	1/20	1/10	1/15	1/20
	OUTPUT R.P.M	180	120	90	120	80	60
	WEIGHT (Kg)	525					

TOOTH CHAMFERING	MODULE						표기외 일반 공차
	5	5-15	15				
HQ. T	C1	0.2	0.5	1.0			각도 : ±0.2°
	C2	1.0	1.5	2.0			
HC & HQ. I	C1	0.5	1.0	2.0			CHAMFER: C1.0
	C2	2.0	3.0	5.0			
				M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)	FILLET: R1.0
							마무리: ∇
							315-1000 : ±0.3
							1000 이상 : ±0.5

() 내의 치수는 다소 변경될수 있음.

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.		KDV GEARED MOTOR 22KW 4P IE3 I=1/10~1/20		CUSTOMER KD V3002 STANDARD TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2020.11.30	PROJECTION	1st		
CHECKED		REF. No.	KD V3002	REV. No.			
APPROVED		DRAWING No.	KDV3002-30-10-20-0D				
		(주) 케이 지 엠 KOREA GEARED MOTOR					

M5#0.8
M6# 1
M8#1.25
M10#1.5
M12#1.75
M16# 2
M18#2.5
M20#2.5
M22#2.5
M24#3