
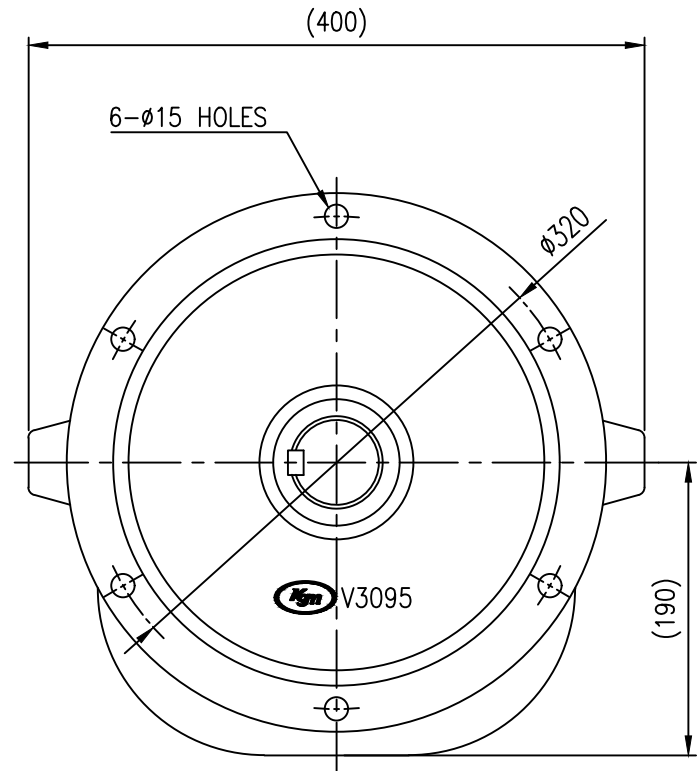


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

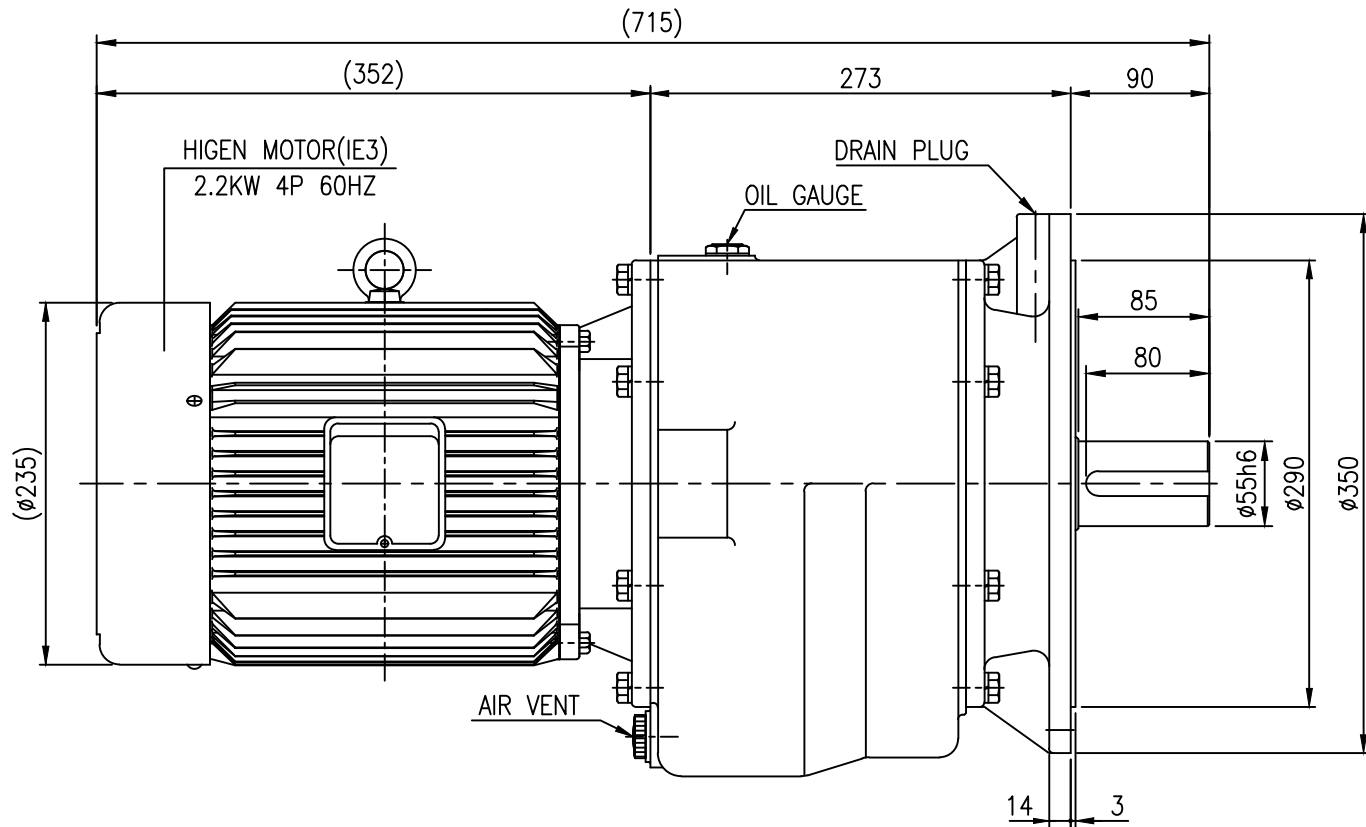

KD V2003	CAPACITY(Kw)	2.2kw4P			1.5kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	168					

()내의 치수는 다소 변경될수 있음.

OUT LINE DWG						
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	KDV GEARED MOTOR		CUSTOMER			
	2.2KW 4P IE3 I=1/40~1/60		KD V2003			
	OUTLINE DIMENSION		STANDARD TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT	mm	
DESIGN	YHH	DATE	2020.12.01	PROJECTION	☞	
CHECKED		REF. No.	KD V2003	REV. No.	△	
APPROVED		DRAWING No.	KDV2003-03-40~60-0D			

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

OUTPUT SHAFT

TOOTH CHAMPERING		M O D U L E						표기와 일반 공차	
		5	5-15	15					
HQ. T	C1	0.2	0.5	1.0				각도 : ±0.2°	6 ~ 30 : ±0.1
	C2	1.0	1.5	2.0				CHAMFER: C1.0	30 ~ 120 : ±0.1
HC & HQ. I	C1	0.5	1.0	2.0				FILLET: R1.0	120 ~ 315 : ±0.1
	C2	2.0	3.0	5.0				마무리: ▽	315 ~ 1000 : ±0.1
					M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)	1000 이상 : ±0.1	

본 도면은 (주)케이지엠의
기술 재산입니다. 본 도면은
자체 재산권 관련 법규에 의
하여 보호되며,
(주)케이지엠으로 부터 문
서에 의한 승인 없이는 본 도
면의 전부 또는 일부를 복사
또는 배포거나, 무단에게 누
설할 수 없습니다.



(주) 케이 지 엠
KOREA GEARED MOTOR