
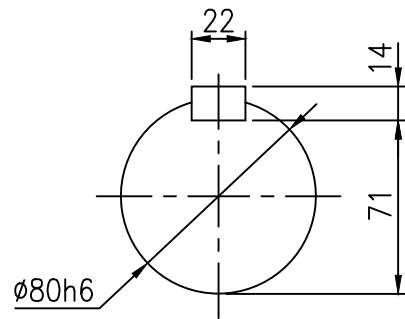
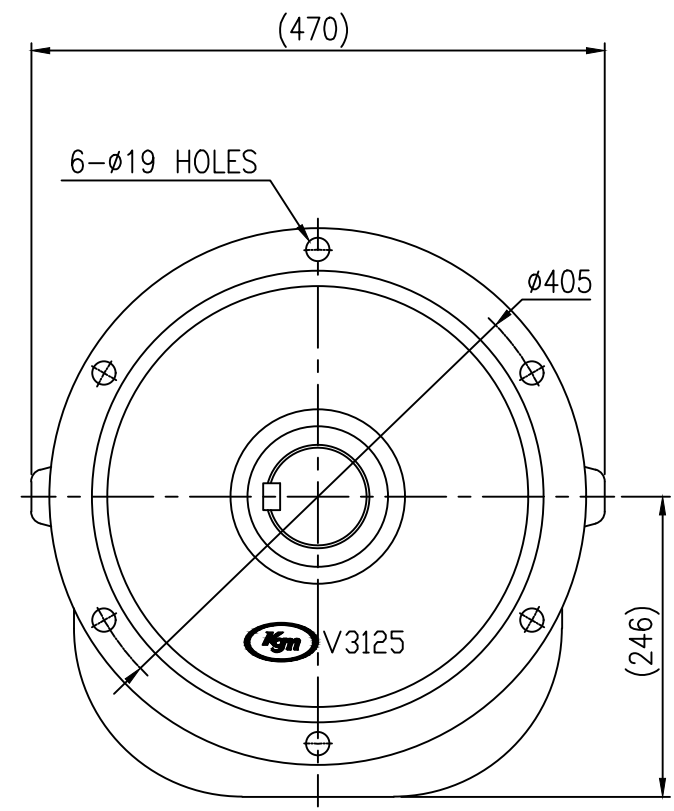


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

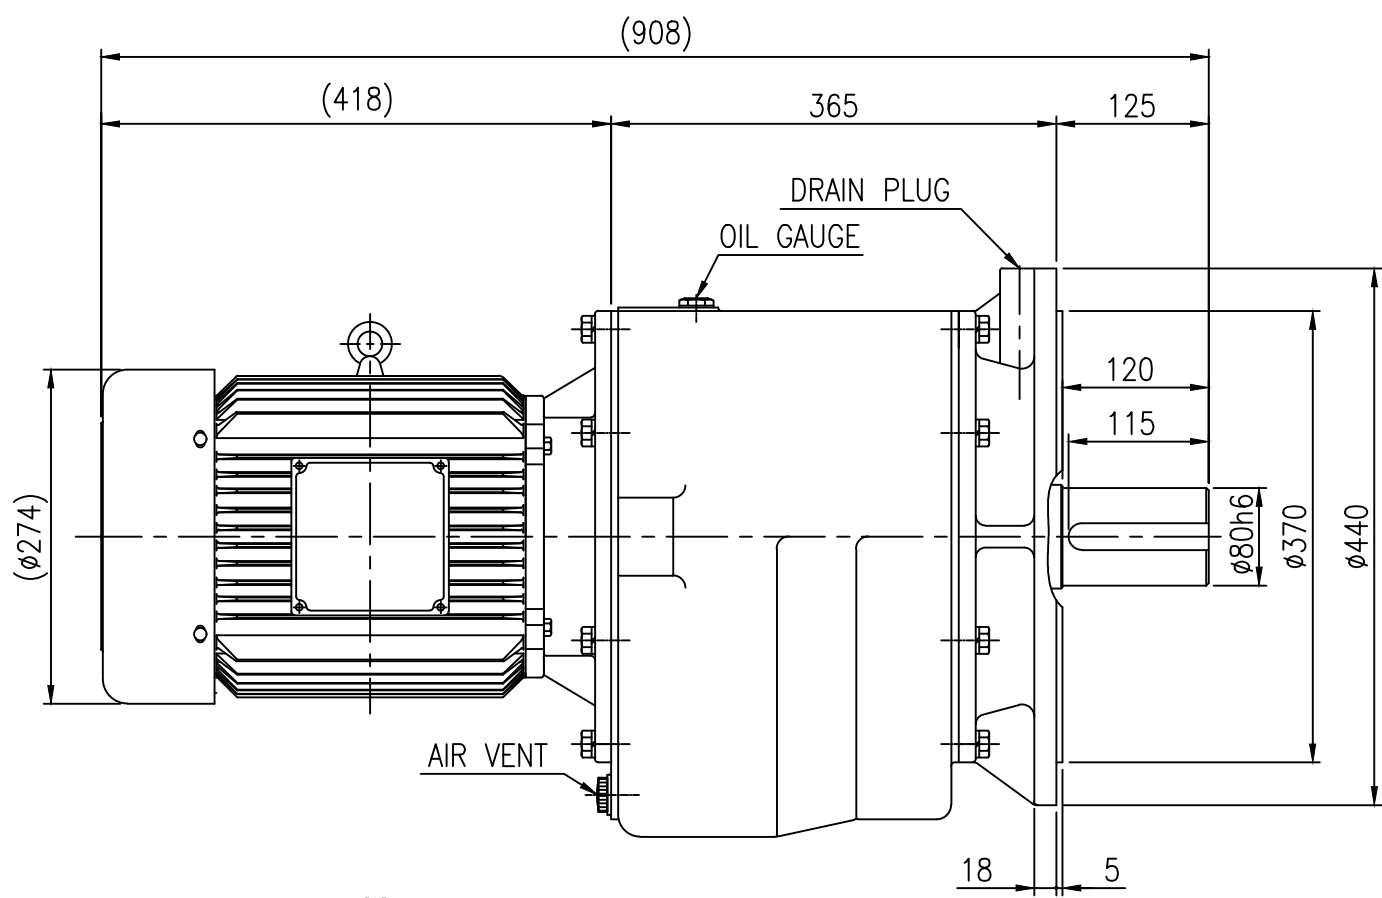

OUTPUT SHAFT

KD V2553	CAPACITY(Kw)	5.5kw4P			3.7kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	332					

()내의 치수는 다소 변경될수 있음.

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

TOOTH CHAMFERING		M O D U L E						표기 및 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ±0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0				마무리: ▽	315 - 1000 : ±0.3
	C2	2.0	3.0	5.0					1000 이상 : ±0.5
		M<8(R0.1-1M)			M=8-15(R0.3M)	M>15(R0.3M)			

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KDV GEARED MOTOR		CUSTOMER				
	5.5KW 4P IE3 I=1/40~1/60		KD V2553				
	OUTLINE DIMENSION		STANDARD TYPE				
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2020.12.01	PROJECTION	1		
CHECKED		REF. No.	KD V2553	REV			
APPROVED		DRAWING No.	KDV2553-7.5-40-60-0D	No.			
		(주) 케이 지 엠					
		KOREA GEARED MOTOR					